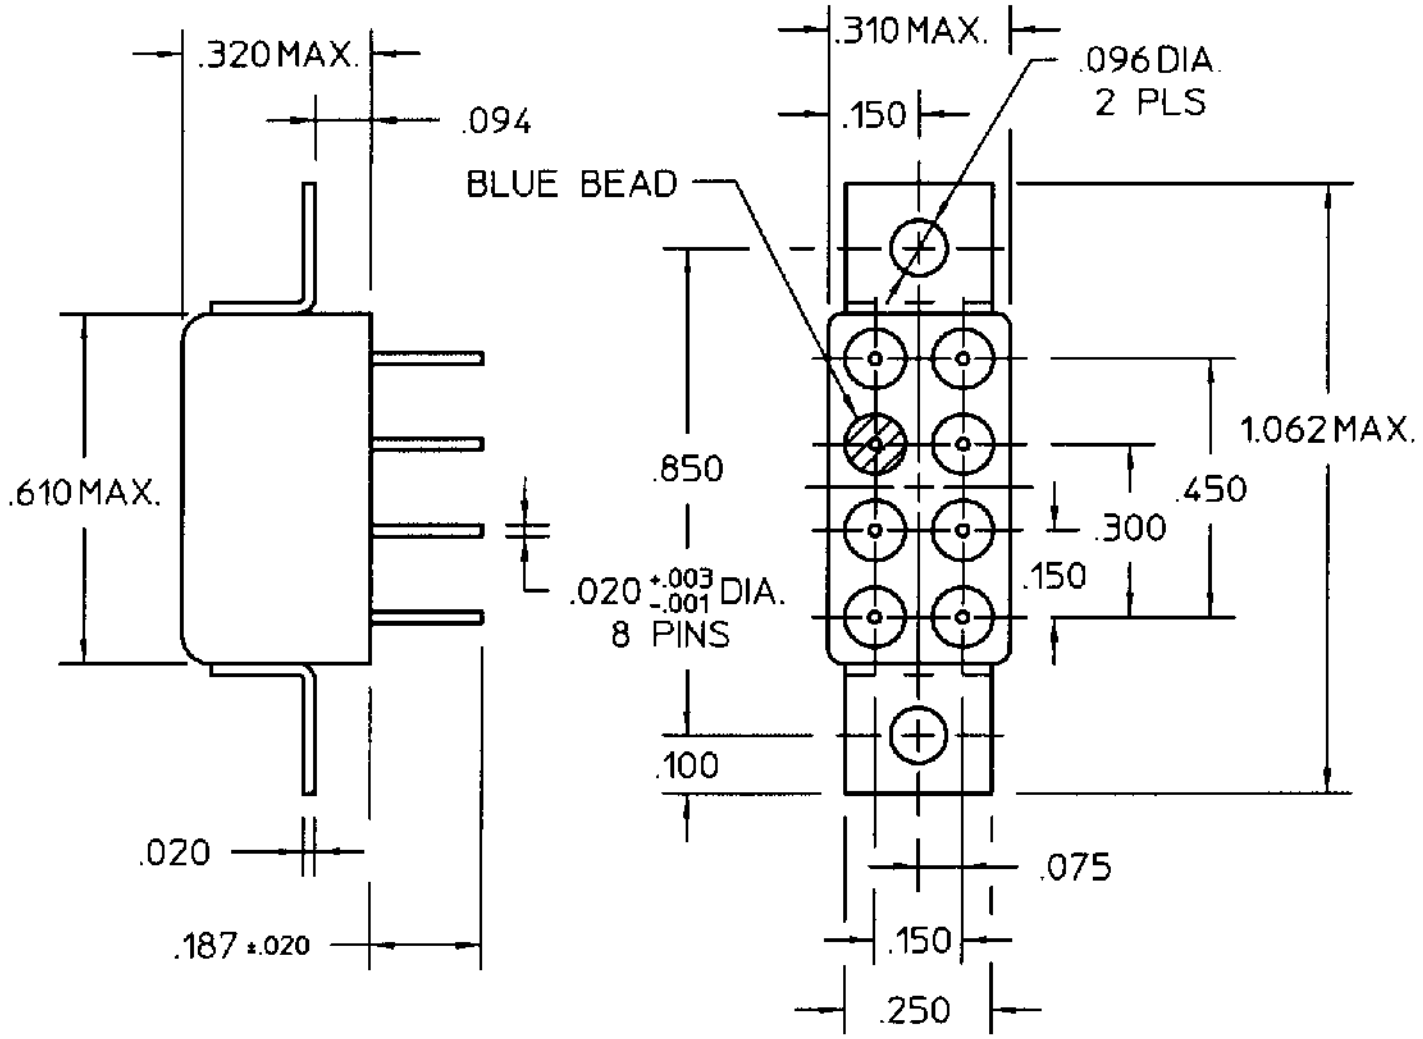


REV. 0

DCO 141491

TOL ± .010 UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE 1350 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C


NOTES: OPERATE 4 MS MAX.
RELEASE 6 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUST. QPL

CUST. NO. M39016/37-025P REV.

"3SBC" RELAY

CUSTOMER DATA SHEET

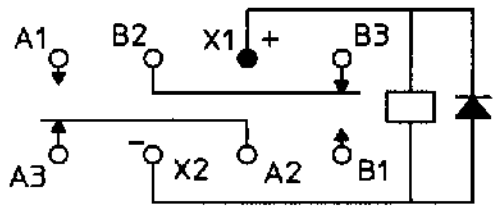

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. B.D. 11/8/99 CK.

COMMUNICATIONS INSTRUMENTS, INC.

3SBC2095A2

F-718 REV 2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

175977-2 3430B2F51RTDF U5254-000005-030PA 1743455-2 1969656-1 SMW73R0JT 3631B101LL 650075-000 917696-1 RH73H2A40MKTN 1-794222-0 1393431-1 2834055-1 CPF0402B37K4E1 CRGCQ2010J3K3 SBCHE64R7K 1903112-2 2005330-1 2310537-1 MPT100C18RF SBCHE154R7K 141991-2 2377783-2 2380312-2 3-1393225-0 936348-1 ROX05SJ18R TE50BR39J 2-292161-3 1-962915-1