


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/21/06	–	INITIAL RELEASE
A	09/02/08	–	REVISE BARREL O.D./ REVISE FERRULE I.D. AND O.D.

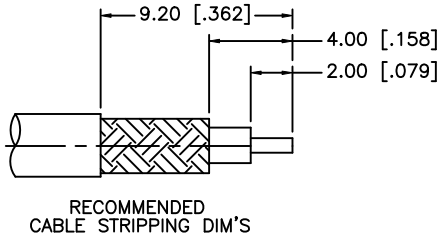



RECOMMENDED
CABLE STRIPPING DIM'S





RECOMMENDED
MOUNTING HOLE




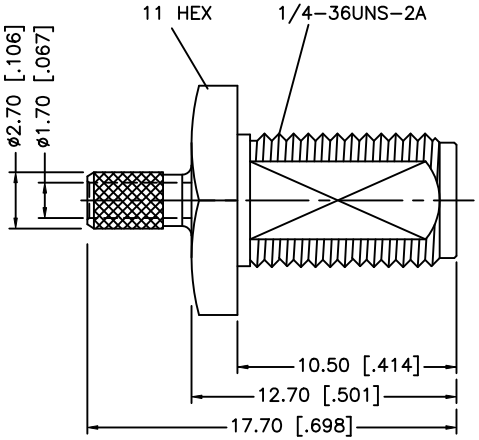

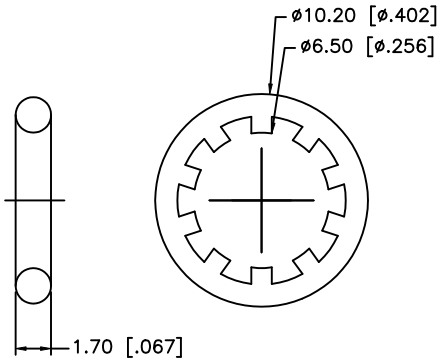







NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128" [3.25]
2. CONTACT PIN TO SOLDER

8	HEAT SHRINK TUBING			1
7	FERRULE	COPPER	GOLD	1
6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN GRS	09/02/08
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/132/132284RP.DWG

Amphenol Connex

PART DESCRIPTION
SMA REVERSE POLARITY BULKHEAD CRIMP PLUG
(FOR RG–174/U, 188A/U, 316/U CABLE)

PART NO. 132284RP

DWG. NO.	REV.	SIZE	SCALE
132284RP.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

54202-G0805CLF 65781-158 86093968813H45V1LF 70218-1116LF 86093488314745V1LF 70430-164LF CD15S13E4RV09LF D15P13A6RV12LF LD15P33E4GV00LF 67996-204HLF 68000-236HLF 70234-112LF 863013A DCMF37P DEM09P032N 68001-200HLF 69192-408HLF 86130202123355E1LF 91614-403ALF 95157-140LF 86093967896755LF LD25S33E4GV00LF RJSBE5080C2 68001-108HLF 68002116HLF 76384-316LF 86093968191755E3LF DAPO15S365TLF RJE061661210 54202-S08-07LF