

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

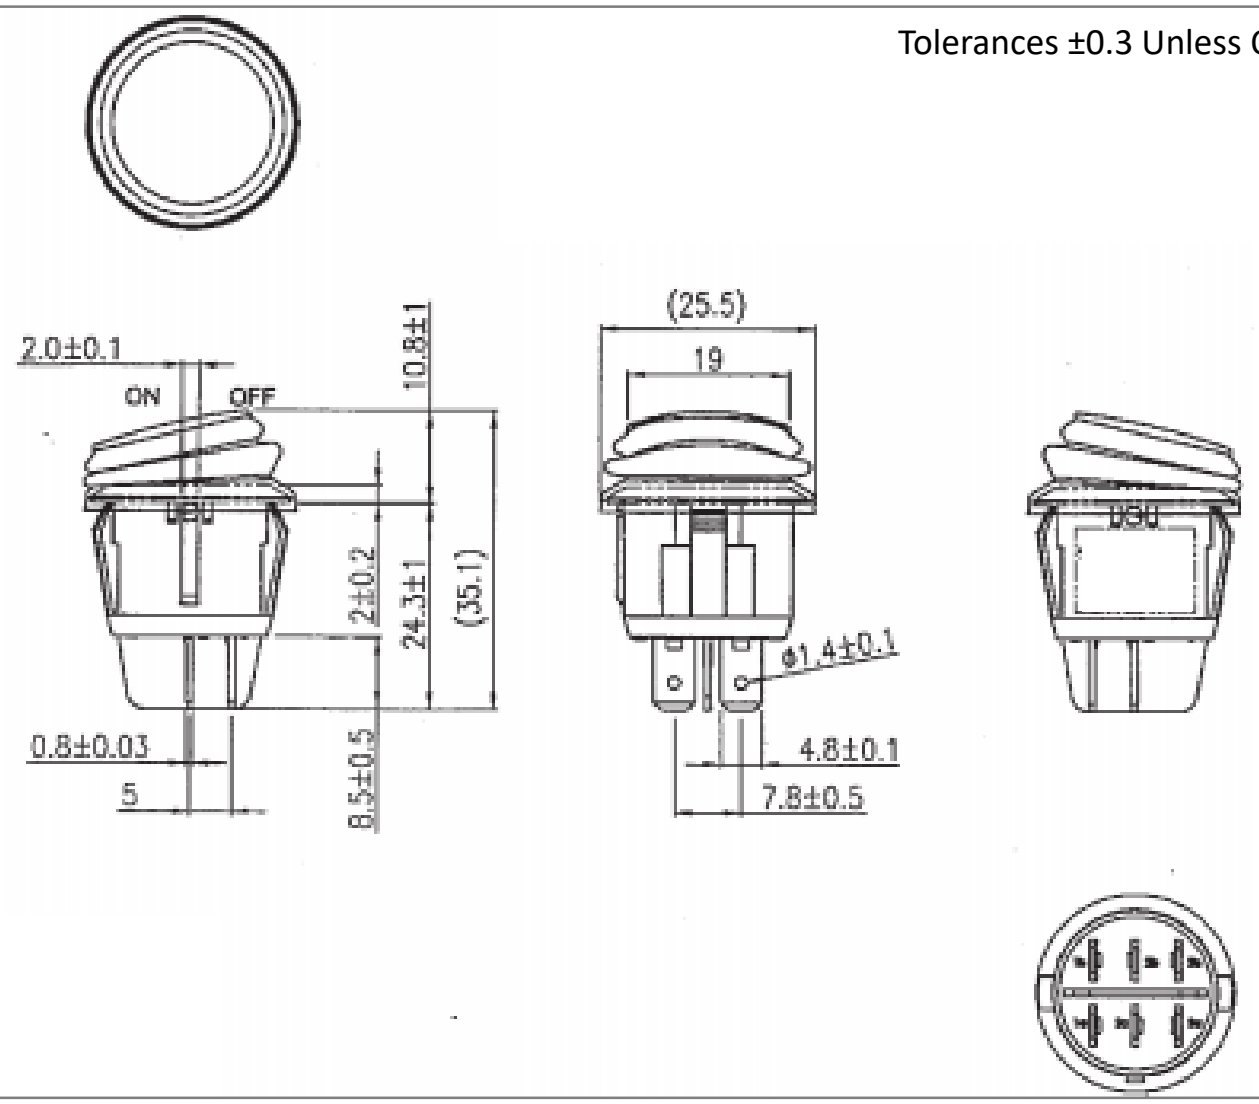

Mounting Hole

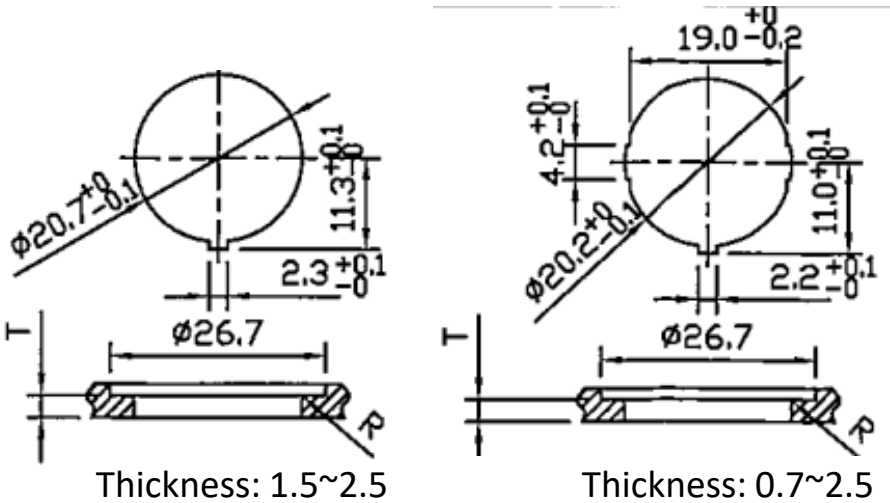


Thickness: 1.5~2.5

Thickness: 0.7~2.5

Circuit Diagram

4P DPST OFF-ON (LED-D)

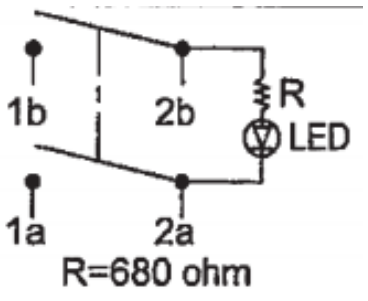

Electrical Specifications

Rating	20A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon#66 (94-V2)
Actuator	Red, PC
LED	Red (Dependent)
Waterproof	IP65

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RC-1A-DC-1-AL SRD1-2A-DC-1-BGN PB-1B-DC-2-RIL RD2-1A-DC-1-AL RG3-1A-DC-1-B
SRD2-1G-DC-1-BNN SRD2-2F-DC-1-RNN SB-1B-DC-3-B SC-B SRC1-1B-DC-1-B TA2-1A-DC-5
TA2-1G-DC-6-O TC6-P1-Z RA4-2A-DC-2-AL RF3-1A-DC-2-GL SRA1-1A-DC-1-NN-2 SRA1-2F-DC-1-NN
SRB1-1G-DC-1-NN WR1 PB-1A-DC-2-B PB-1A-DC-2-RDL PD-1E-DC-9-UL SB-1B-DC-3-R TB1-2H-DC-6
TE1-1F-DC-1-PB RF1-1A-DC-2-B-3 TA1-1A-DC-4 TE3-1A-DC-1-AL SRD2-2F-DC-1-BNN TE6-1A-DC-1-UL