

PIEZO BUZZER
BRP3005L-30

Dimensions in mm

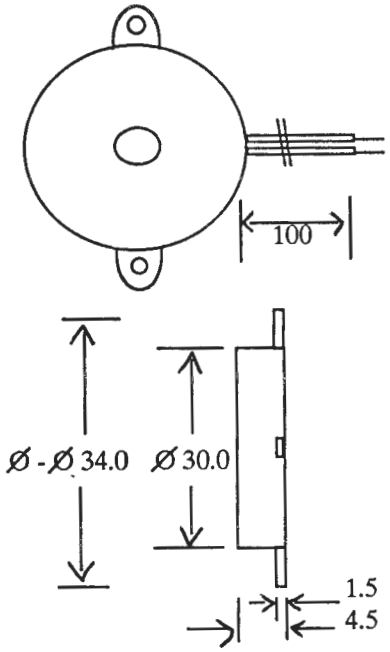

Sound Pressure Vs. Freq.
Sinewave 10V P-P at 30 cm

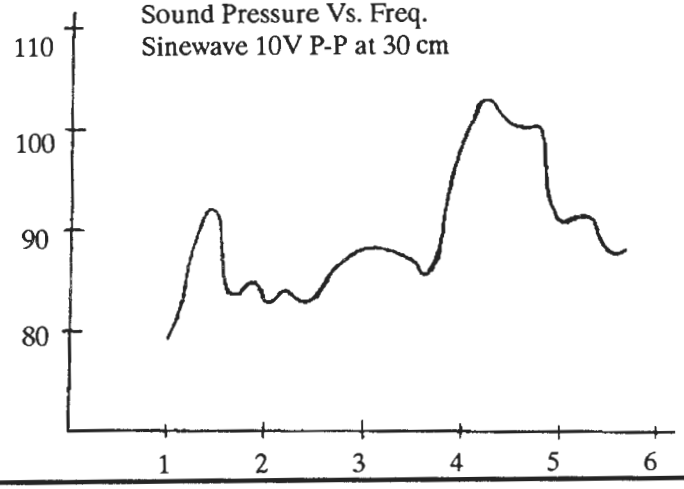

SPECIFICATIONS

Model No.	BRP3005L-30
Resonant Frequency (Hz)	4200 ± 500
Resonant Resistance (ohm)	300
Electrostatic Capacitance (PF)	20000 ± 30%
Max. Input Voltage (Vp-p)	30
Operating Temperature (C)	- 20 to + 60

INTERVOX International
INTERNATIONAL COMPONENTS CORPORATION
215 MCCORMICK DRIVE, BOHEMIA, NY 11716
FAX: 631-952-9595 FAX: 631-952-9597

Title Piezo Buzzer		
	Intervox Model # BRP3005L-30	**Rev**
Scale	**Date**	**Sheet of**

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

International Components:

BRP4535S-12-CP BRT1209P-01-50 S350SA BRP4535S-24-CP BRT1209PF-12 BRT1615P-12 BS2316P-24-C-B S225RL BRT1615P-06 BS2620PH-12-C S225RA-V BRP2212L-12-C BRT1209PF-06 S300SA BRP3025L-12-CP BRT1209PF-01 MEO-94PN-01-643 BRP1708P-30 BRP4535S-24-CD BR2618L-12 BRP3018P-12-C BRT1209P-06-C BRT1615P-06-C S150SLA S200RA S200SA BRP3005L-30 BRP4016L-12-CP S100RMSS S150SL-PC-REV1