


NOTES:

1. CONNECTOR MATERIAL:
   HOUISING: THERMOPLASTIC BLACK UL94 V-0
   SHIELD: Brass
   SHIELD PLATING: NICKEL
   CONTACT: PHOSPHOR BRONZE
   CONTACT PLATING: SELECTIVE GOLD, 30 MICRO-INCHS MIN IN CONTACT AREA
2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL DRAWING FOR OMITTED PINS
3. RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68.
4. THE PART IS RECOMMENDDED FOR WAVE SOLDERING PROCESS PEAK SOLDERING TEMPERATURE IS 260°C MAX, 10 SECS MAX
5. OPERATING TEMPERATURE T=-40°C TO +85°C.
6. STORAGE TEMPERATURE T=-40°C TO +85°C.
7. PACKAGING INFORMATION: 50 PCS/ TRAY, 1200 PCS/BOX.



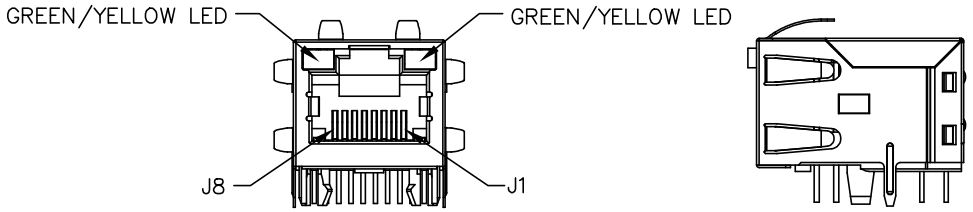


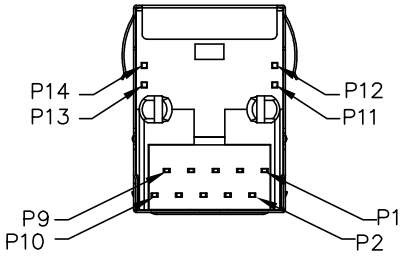

FINAL OUTLINE

@ Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/11/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,1GD,1:1,TU	JXD1-0002NL-11	-	1 OF 5	JXD1-0002NL	D

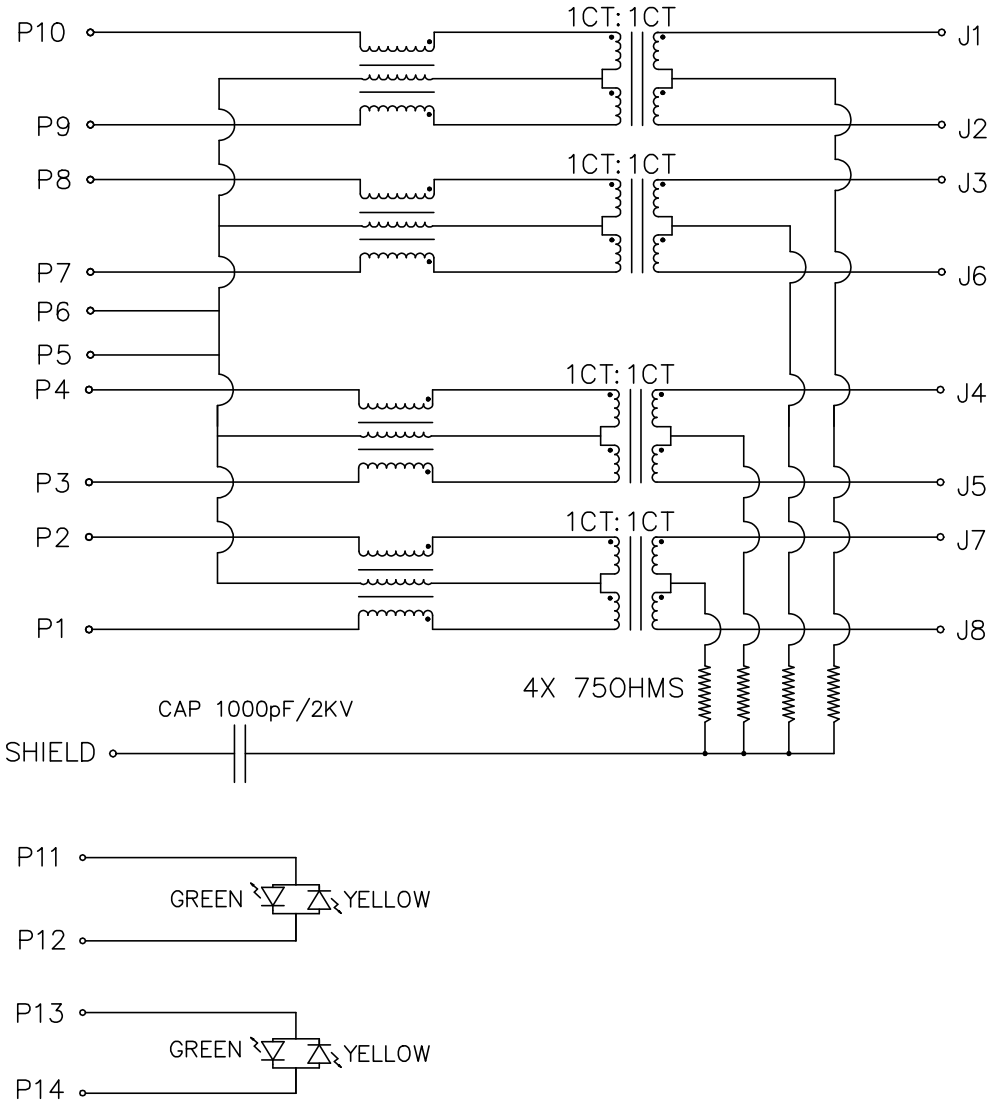

SCHEMATIC

ELECTRONICAL SPECIFICATIONS:


1. TURN RATIO @100KHz: (P10~P9):(J1~J2) = 1:1±5%
   (P8~P7):(J3~J6) = 1:1±5%
   (P4~P3):(J4~J5) = 1:1±5%
   (P2~P1):(J7~J8) = 1:1±5%
2. PRIMARY INDUCTANCE: 350uH MIN @100KHZ,0.1V 8mA DC BIAS
3. DC RESISTANCE: 1.2 OHMS MAX
4. INSERTION LOSS: 1–100MHz –1.0dB MAX
   100–125MHz –1.2dB MAX
5. RETURN LOSS: 1–40MHz –16dB MIN
   40–60MHz –12dB MIN
   60–80MHz –10dB MIN
   80–100MHz –8dB MIN
6. CROSS TALK: 1–100MHz –30dB MIN
7. COMMON TO COMMON MODE ATTENUATION: 1–100MHz –30dB MIN
8. ISOLATION: PHY SIDE TO LINE SIDE: 2250VDC


LED SPECIFICATION


STANDARD LED	WAVELENGTH	FORWARD V(MAX)	TYP
GREEN	565nm	2.4V	2.2V
YELLOW	590nm	2.5V	2.1V


*WITH A FORWARD CURRENT OF 20mA

@ Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/11/18)





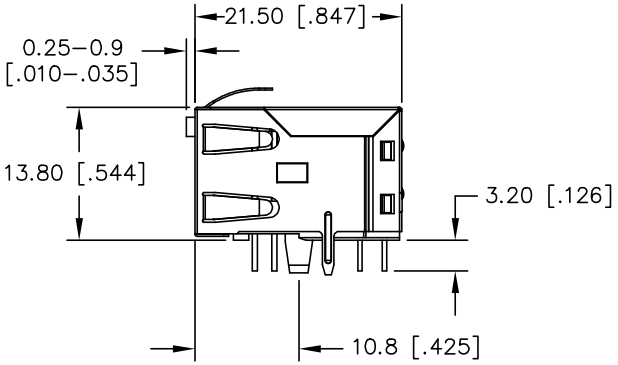





DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING
TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.25 [±.010]

© Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/11/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,1GD,1:1,TU	JXD1–0002NL–11	–	3 OF 5	JXD1–0002NL	D

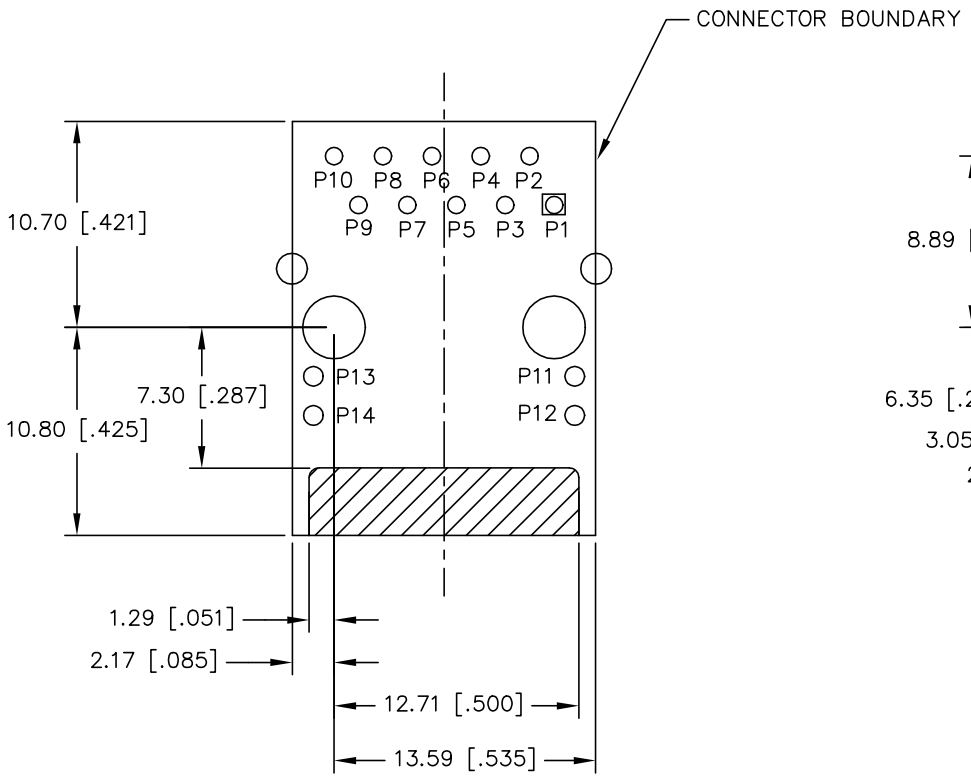

KEEP-OUT AREA (COMPONENT SIDE SHOWN)

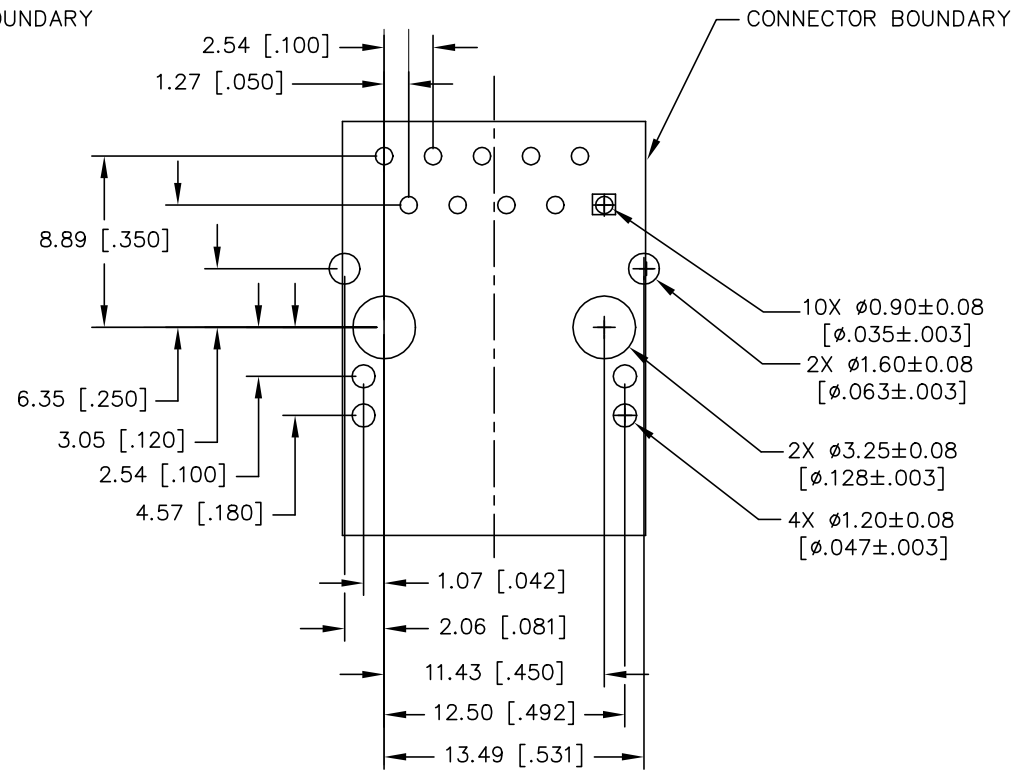


RECOMMENDED PWB LAYOUT
(COMPONENT SIDE SHOWN)

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING
TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.10 [±.004]

© Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/11/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,1GD,1:1,TU	JXD1-0002NL-11	–	4 OF 5	JXD1-0002NL	D

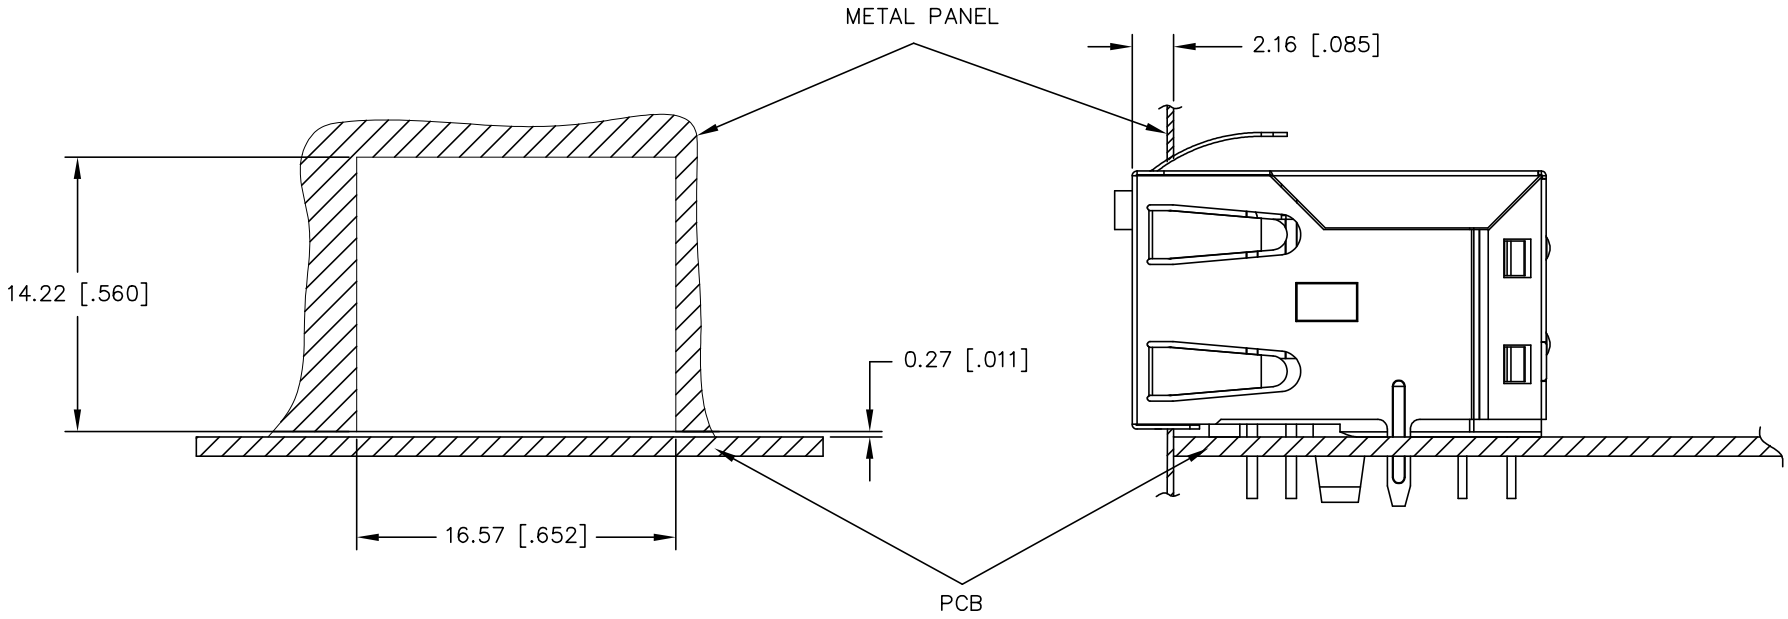

SUGGESTED PANEL CUTOUT

DIMENSIONS ARE IN MILLIMETERS [INCHES] WITH THE FOLLOWING
TOLERANCES: [INCHES] ARE FOR REFERENCE ONLY.
X.XX= ±0.10 [±.004]

© Copyright, 2018. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (09/11/18)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CONN,RJ45,1X1,1GD,1:1,TU	JXD1-0002NL-11	-	5 OF 5	JXD1-0002NL	D

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Pulse Electronics:

BBUP00201209121Y00 PD380-4000S1NF PG2290.151HLT ANT1204F007R0870A AWCS0012070736NJ00 P0585NL PA4320.104NLT PGL6395.121HLT JXD2-0Z10NL PA4320.334NLT PE-67100NL DPX1608LKF3R2460A E5J88-032-02-L PE-68386NLT W1093 BDHE002520122R2MQ1 BSPQ000603043N0B00 PA0369NL W3334B0150 W1902 BSPQ000603041N4B00 PA2744NL PA4341.301NLT PA4343.361NLT PAT6261.003NLT W3078 JXD0-2015NL PA4341.221NLT PA4343.451NLT PD617-6000M243