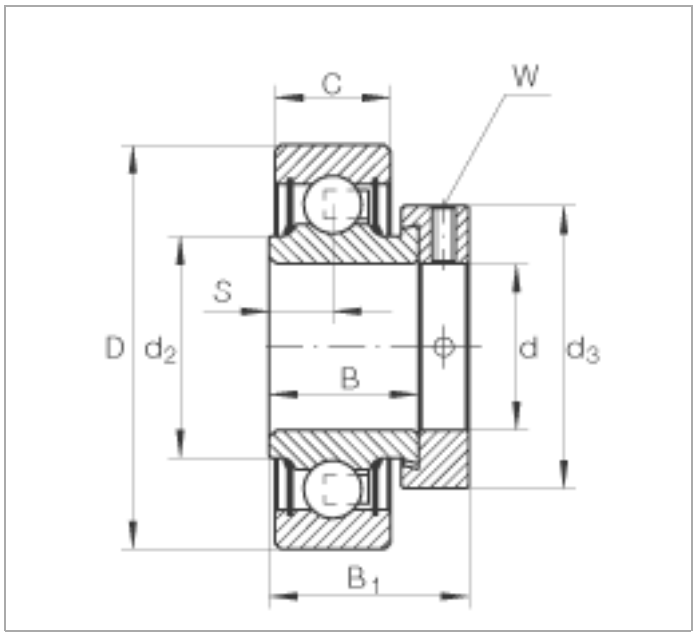
Radial insert ball bearings

RAE25-XL-NPP-FA106 (Series RAE..-NPP)

cylindrical outer ring, location by eccentric locking collar, P seals on both sides

The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue ordering system (http://www.ina.de/content.ina.de/en/mediathek/library/library.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	25	mm	
D	52	mm	
B_1	31	mm	
B	21,4	mm	
C	15	mm	
d_2	30,5	mm	
$d_{3\,max}$	37,5	mm	
S	7,5	mm	
W	3	mm	
m	0,2	kg	Mass
C_{ur}	395	N	Fatigue limit load, radial
C_r	14900	N	Basic dynamic load rating, radial
C_{0r}	7800	N	Basic static load rating, radial
f_0	13,8		Calculation factor


C
W
S
D
d2
B
d
d3
B1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

INA:

NUKR35-X-A PCJT40-XL-N GE40-UK-2RS-A KH06-PP NA2200-2RSR NATV15-PP-A NKIB5902-XL GE50-UK-2RS-A IR17X22X14-IS1-OF-XL RAE30-XL-NPP-FA106 RCJY40-XL-N GE35-DO-2RS NKIA59/22-XL PNA20/42-XL HK20202RSL271 KR5207-2RS KWVE25-B-V2-G3 GE50-DO-2RS KRE52-PP-A NA4907-2RSR-XL TME50-XL-N GE40-FO-2RS KH10PP LR203-X-2RSR NKXR30-XL RME60-XL-N#N1>1 GE6-UK IR7X10X12-XL KB16-PP-AS KB40-PP-AS