
SERIES 400 SWITCHES

ROCKER SWITCHES - SUB-MINIATURE

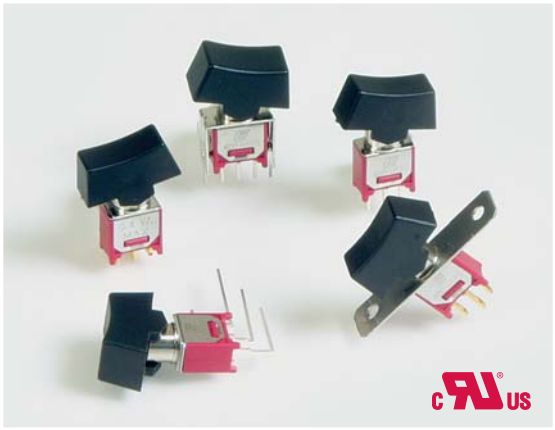

FEATURES & BENEFITS

- Variety of switching functions
- Sub-miniature
- Multiple actuator options

APPLICATIONS/MARKETS

- Telecommunications
- Instrumentation
- Test equipment
- Networking
- Computer peripherals

SPECIFICATIONS

Contact Rating:	See contact material options
Life Expectancy:	30,000 make-and-break cycles at full load
Contact Resistance:	20 mΩ max. typical initial @ 2-4 VDC 100 mA for silver and gold plated contacts
Insulation Resistance:	1,000 MΩ min
Dielectric Strength:	1,000 V RMS @ sea level
Operating Temperature:	-30° C to 85° C

MATERIALS

Case:	Diallyl phthalate (DAP) or glass filled nylon, flame retardant, heat stabilized (UL 94-V0)
Rocker:	Nylon
Bushing:	Brass, nickel plated
Housing:	Stainless steel
Terminal/Switch Support:	Brass, or steel tin plated
Contacts / Terminals:	Silver or gold plated copper alloy

HOW TO ORDER

SERIES	MODEL NO.	ACTUATOR	ACTUATOR COLOR	TERMINATION	CONTACT MATERIAL	SEAL
400	MSP1 MSP2 MSP3 MSP4 MSP5 MSP6*** MDP1 MDP2 MDP3	R1* R6**	BLK =Black WHT=White RED =Red	M1 M2 M6 M61 M7 M71 VS2 VS21	Q = Silver R = Gold	E = Epoxy Sealed at Base of Terminal

* Std. all models except SPDT with M6 + M61 terminations.

** Std. on SPDT models with M6 + M61 terminations.

*** Not available with M6 terminations.


Example Ordering Number

400–MSP1–R6–BLK–M6–R–E


Specifications subject to change without notice.

SPDT





SCHEMATIC

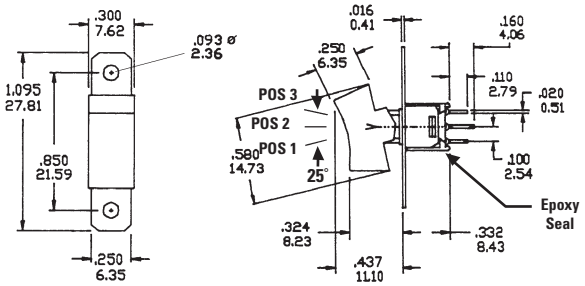



Model No.	POS 1	POS 2	POS 3
MSP-1	ON	NONE	ON
MSP-2	ON	NONE	(ON)
MSP-3	ON	OFF	ON
MSP-4	(ON)	OFF	(ON)
MSP-5	ON	OFF	(ON)
MSP-6	OFF	NONE	ON
Term. Comm.	2-3	OPEN	2-1

( ) = Momentary


E•SWITCH®
Phone: 800-867-2717
Fax: 763-531-8235

DPDT





SCHEMATIC

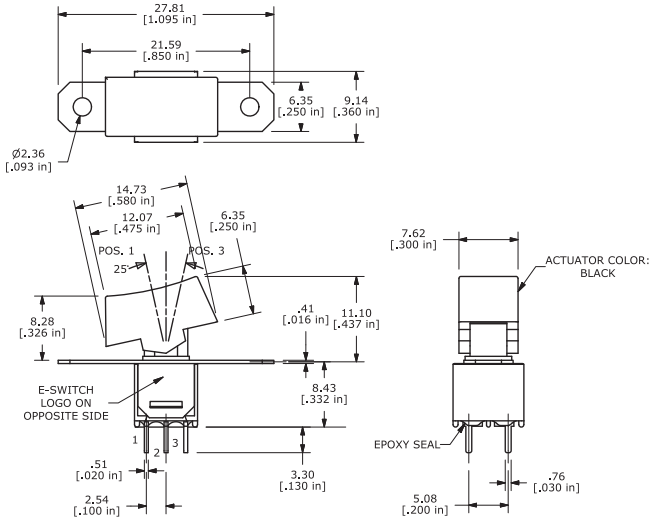


Model No.	POS 1	POS 2	POS 3
MDP-1	ON	NONE	ON
MDP-2	ON	NONE	(ON)
MDP-3	ON	OFF	ON
Term. Comm.	2-3, 5-6	OPEN	2-1, 5-4

( ) = Momentary


ACTUATOR OPTIONS

R1

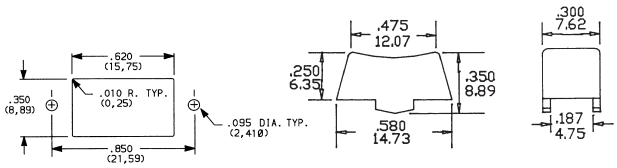

Std. all models except SPDT with M6 terminations.

R6

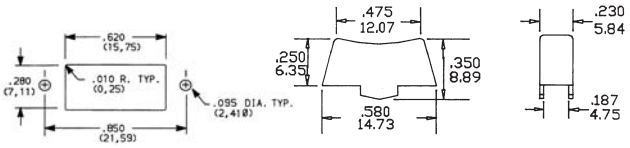

Std. on SPDT models with M6 terminations.


TERMINATION OPTIONS

M1


SOLDER LUG



Single Pole



Double Pole




M2


P.C. MOUNT



Single Pole



Double Pole




SERIES 400 SWITCHES

ROCKER SWITCHES - SUB-MINIATURE

M6


SPDT




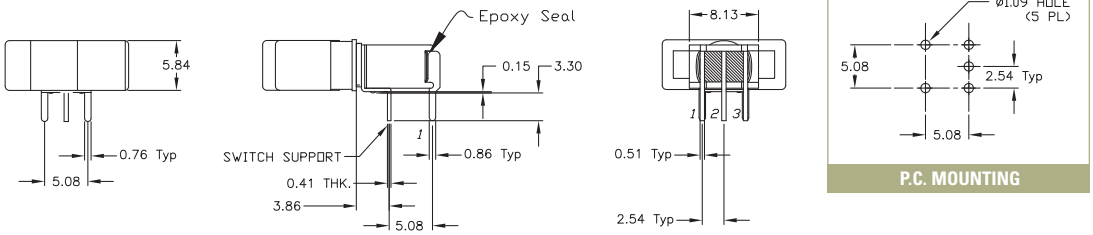

M6

DPDT




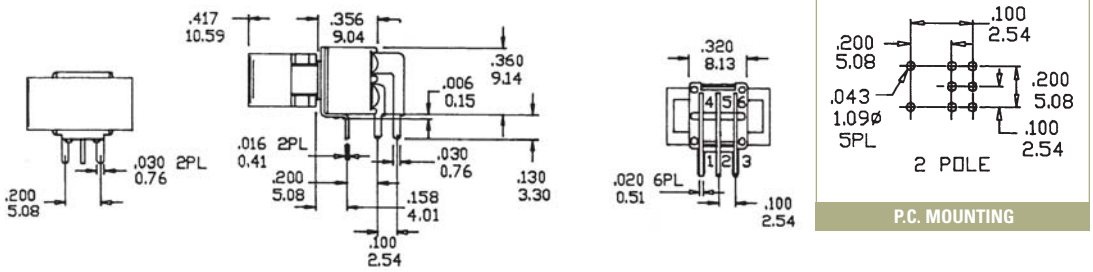

M61

SPDT




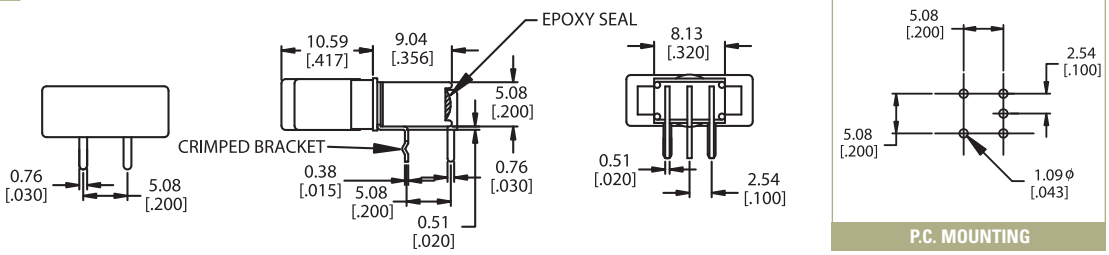

M61

DPDT




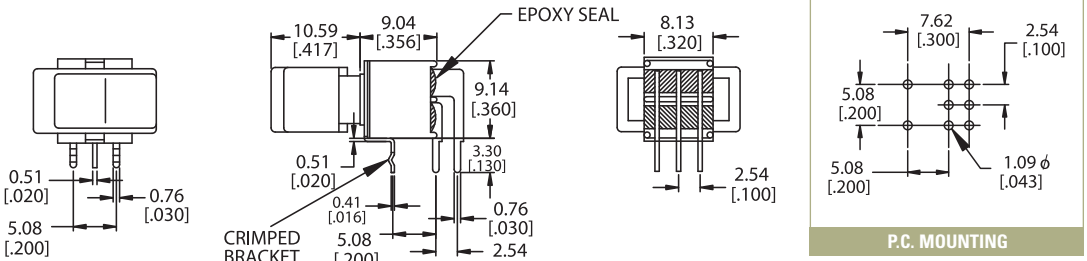

M7


SPDT




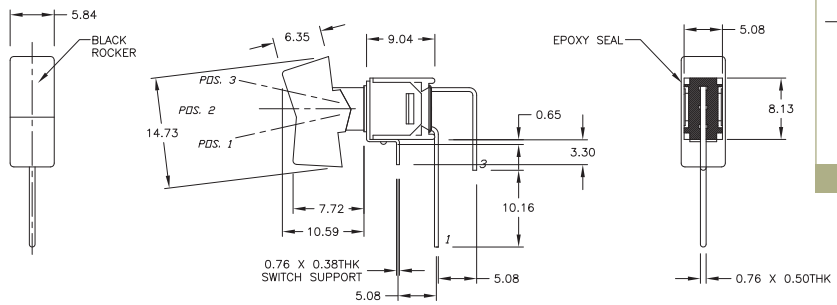

M7

DPDT




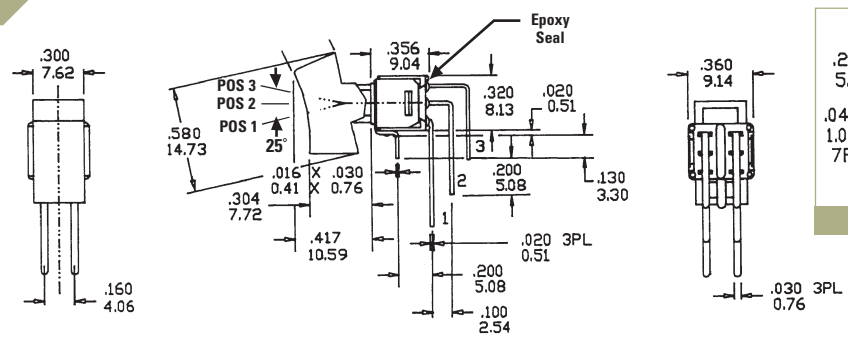

M71

SPDT



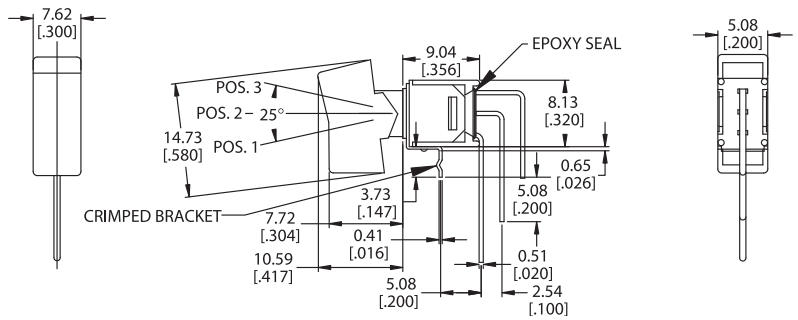


SERIES 400 SWITCHES


ROCKER SWITCHES - SUB-MINIATURE


VS2

SPDT





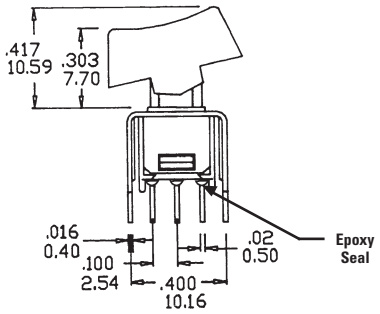





P.C. MOUNTING


VS2

DPDT



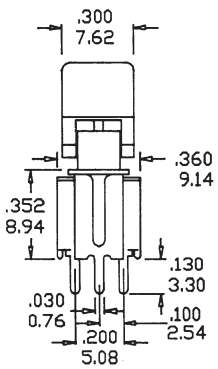

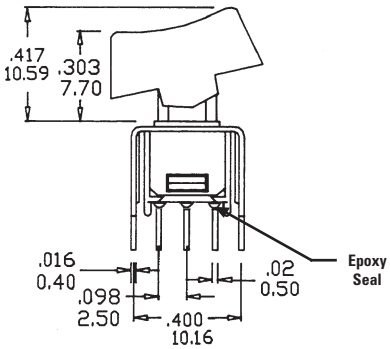





P.C. MOUNTING


VS21

SPDT



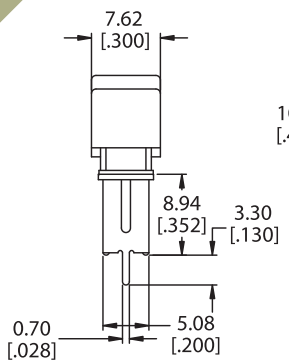

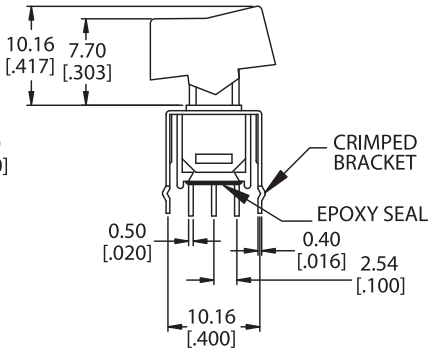



P.C. MOUNTING

CONTACT MATERIAL OPTIONS

Q

Fixed Terminal:	Silver plated copper alloy
Moving Contact:	Silver plated copper alloy
Rating:	3 AMPS @ 120 VAC or 28 VDC; 1 AMP @ 250VAC

R

Fixed Terminal:	Copper alloy with gold plate over nickel plate
Moving Contact:	Copper alloy with gold plate over nickel plate
Rating:	0.4 VA max. @ 20 VAC or DC max.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

E-SWITCH:

200USP9T1A1M2RE 6JBLK EG1271 R1966ABLKBLKFF R5ABLKBLKFF0 RT1105AF260Q
TL1105SPF100Q EG1213 PS1024ALRED TD1150AF100Q TL1105VF100Q TL9100AF350Q EG1270
LB22F2GQ1111 PVS7F2HSS331 TL-3315-N-F100-Q TL59FF260Q MS0850506F075P1A PS1023ABLK
TL1100CF160Q TL3312NF160Q PBH6UEENAGX WBL4UEEGBQR05CLR 100DP1T1B1M1QEH
TL1240GQ2JBLK TL3253BRNBRN160Q TL3342F450QG ULV4FMGSS341 KAE01SGGT PV4F2Y0SS-315