
SPECIFICATIONS

(RoHS Compliant)

Model Number: CR8025-HD24BPL Version: 00

Part Number: 17002029A Mar 13, 2023

Mechanical Drawing:

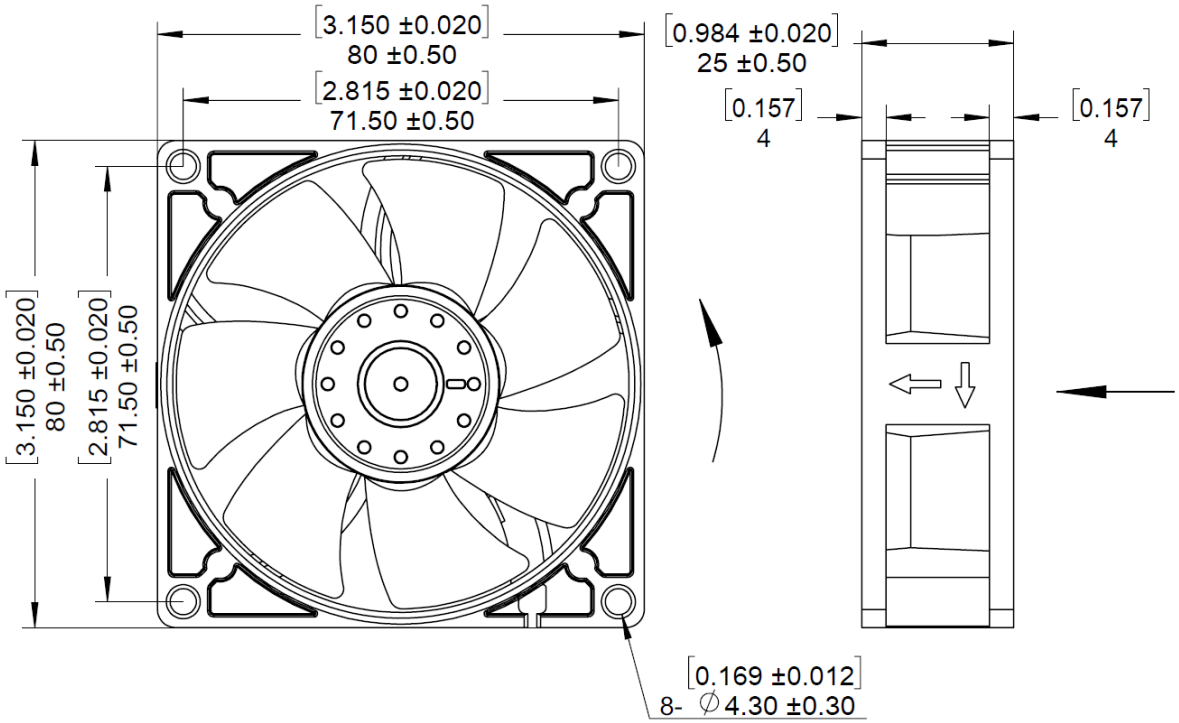

Motor:

Nominal Voltage	= 24 vdc
Operating Voltage Range	= 21.6 – 26.4 vdc
Nominal Running Current	= 0.16 amps
Max. Locked Rotor Current	= 0.30 amps
Running Power	= 3.84 watts
Average Speed	= 4000 RPM
Bearings	= Ball
Air Flow	= 43.7CFM
Acoustic	= 48 dBA
Weight	= 80g

Construction:

Venturi: Plastic, Black, UL 94V-0
Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 50,000 hours at 40°C.

Additional Features:

Brushless DC Motor
Automatic Restart Capability
Electronic Locked Rotor Protection
Polarity Protected

Operating Temperature:	-10°C to 70°C
Storage Temperature:	-40°C to 85°C


Agencies:

UL,CE

Termination:

250±10mm , 24AWG UL1007 Leadwires
Red = Power(+)
Black = Return(-)

PQ Curve:

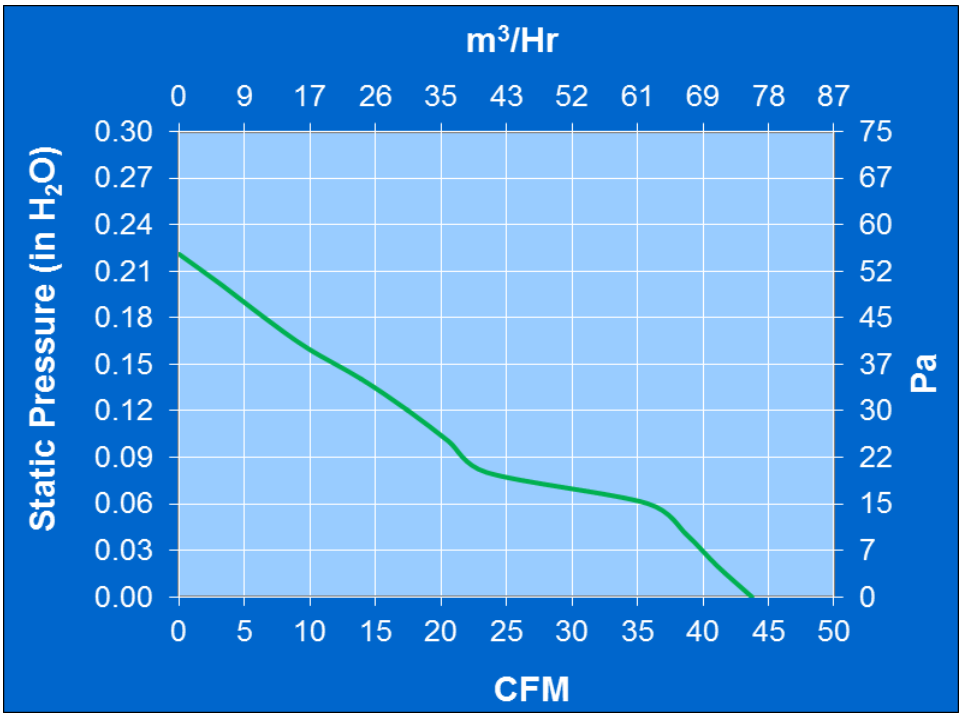
m³/Hr
0 9 17 26 35 43 52 61 69 78 87
Static Pressure (in H2O)
0.30 0.27 0.24 0.21 0.18 0.15 0.12 0.09 0.06 0.03 0.00
75 67 60 52 45 37 30 22 15 7 0
Pa
0 5 10 15 20 25 30 35 40 45 50
CFM

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Comair Rotron:

MA2B3 19031842A 19028885A 19032183A 19039646A GDA1238-48BB 031081 17002001A 19028868A 19028933A 19030616A 19032105A 032620 039824 19039299A 19039306A 19039671A MD24B5-E2 19039030A 032772 17002087A CLE2L2 19020188A 032740 17001178A 19030389A 476042 GL24B7-E2 19039031A 031176 17001219A 19030622A 17002016A 19031092A