


CAD FILE:

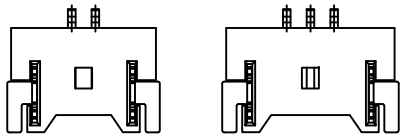

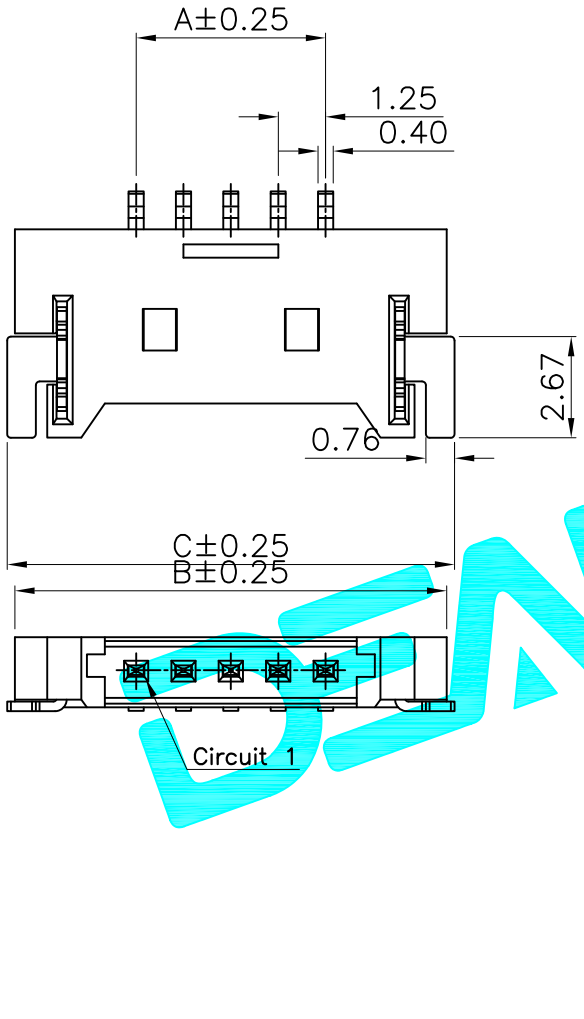

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: −25℃~+85℃
Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material:Phosphor Bronze/ Gold-plated
Solder Tabs: Brass/Gold- plated
Material: Nylon 6T,UL94V-0
Color: Natural(Beige)

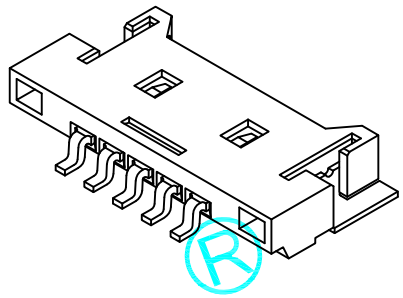

PART NO.	Dimensions		
	A	B	C
L125RS-02PW	1.25	7.65	8.07
L125RS-03PW	2.50	8.90	9.32
L125RS-04PW	3.75	10.15	10.57
L125RS-05PW	5.00	11.40	11.82
L125RS-06PW	6.25	12.65	13.07
L125RS-07PW	7.50	13.90	14.32
L125RS-08PW	8.75	15.15	15.57
L125RS-09PW	10.00	16.40	16.82
L125RS-10PW	11.25	17.65	18.07
L125RS-11PW	12.50	18.90	19.32
L125RS-12PW	13.75	20.15	20.57
L125RS-13PW	16.25	22.65	23.07
L125RS-15PW	17.50	23.90	24.32
L125RS-16PW	18.75	25.15	25.57
L125RS-20PW	23.75	30.15	30.57
L125RS-30PW	36.25	42.65	43.07

DEALON 德之隆

APPROVALS		DATE
DRAWN	G.M.Chen	2015/7/17
CHECKED		
APPROVALS		

DEALON德之隆® ELECTRONICS CO.,LTD

TITLE: DC POWER JACKES
PART NO. L125RS-XXPW
UNIT: mm SCALE: 1:1 SHEET 1 OF 1
DRAWING NO. ——— PROJ:

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

DEALON:

DW127R-22-12-23 DW254S-22-04-85 DZ254R-11-04-63 1.25-8PWB DZ254S-11-03-48 MK-12C01-G1.5 USB-TYPE-C-009 USB-TYPE-C-018 1.25-3PS 1.25-3PWB DZ254R-11-09-63 DZ254S-11-02-48 DZ254S-22-04-75 1.25-5PS DZ127S-22-06-55 XH-4A 1.0-4PWB XH-2PWB 1.25-4PS 1.25-4PWB DW254W-11-06-85 DZ127R-11-06-25 USB-TYPE-C-019 XH-4PS 1.25-5PWB DM254R-11-04-85 XHB-2A DW254S-22-06-85 PH-2PWB XH-4PWB