



REV.	DATE	DESCRIPTION
NC	02/18/03	INITIAL RELEASE

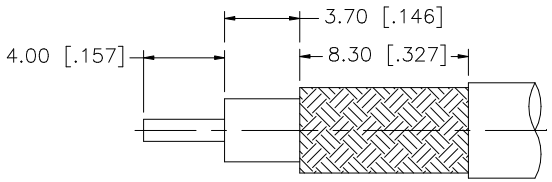

RECOMMENDED
CABLE STRIPPING DIM'S

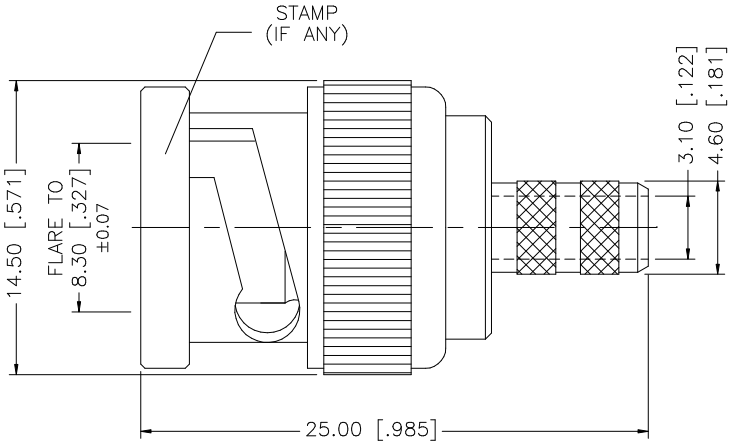

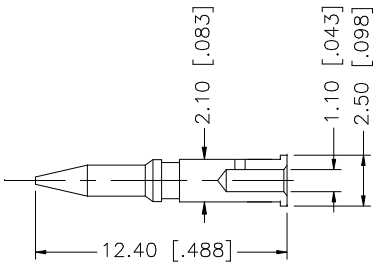

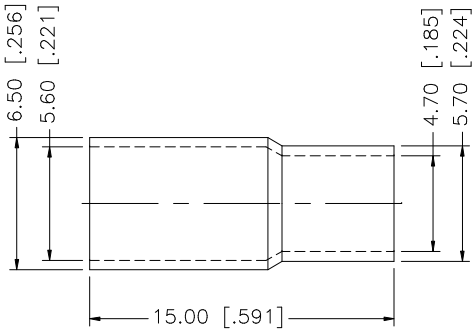

	DESCRIPTION	MATERIAL	FINISH	QTY
9				
8				
7				
6				
5				
4	FERRULE	BRASS	NICKEL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	DELRIN	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

	APPROVALS	DATE
DRAWN	G.R.S.	01/06/03
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/112/112128.DWG	

Amphenol Connex

PART DESCRIPTION
BNC CRIMP PLUG
(RG-58/U PLENUM CABLE)

PART NO. 112128

DWG. NO.	REV.	SIZE	SCALE
112128.DWG	C	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

68001-108HLF 86093967896755LF CD15S13E4RV09LF 54202-S08-07LF 68000-236HLF 70234-112LF 86093488314745V1LF 863013A 54202-G0805CLF 65781-158 76384-316LF 91614-403ALF DCMF37P 86093968191755E3LF 95157-140LF D15P13A6RV12LF RJSBE5080C2 67996-204HLF 68001-200HLF 68002116HLF 70430-164LF 86130202123355E1LF DEM09P032N LD25S33E4GV00LF 70218-1116LF 86093968813H45V1LF DAPO15S365TLF LD15P33E4GV00LF RJE061661210 69192-408HLF