

RoHS

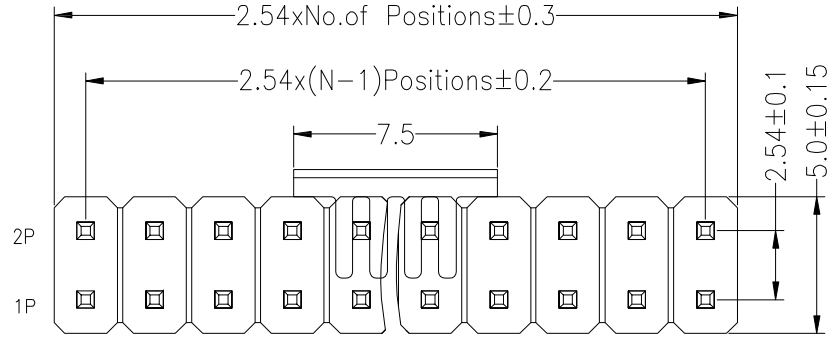



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

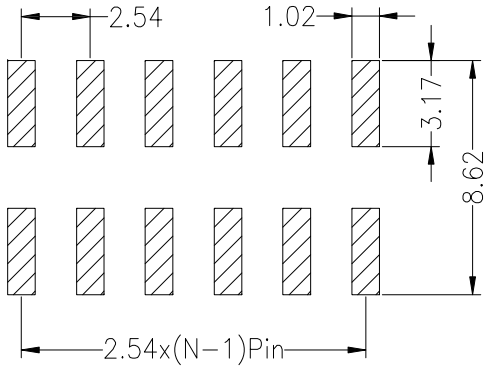

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T

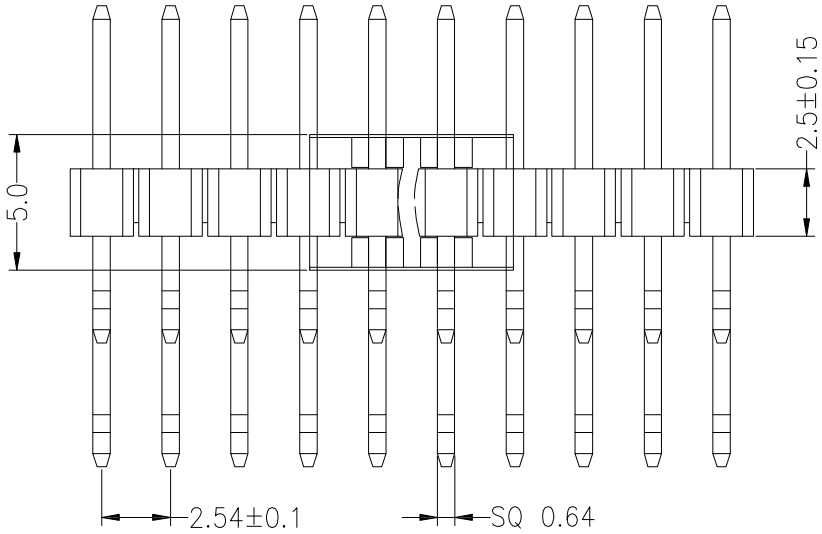

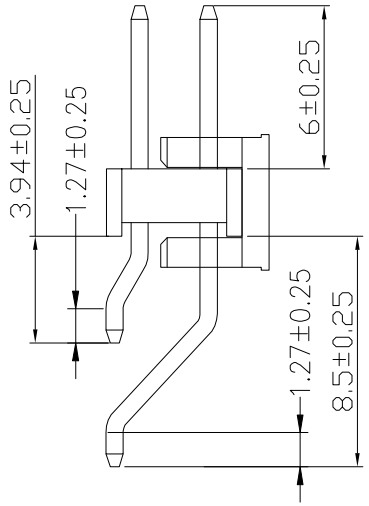

TOLERANCE UNLESS OTHERWISE SPEC		SHENZHEN FUGANG TECHNOLOGY CO.,LTD				
BASIC DIMENSION	TOLERANCE	DSND	H C	26.02.23	TITLE:NEEDLE ARRANGEMENT	
x.x	±0.50	CHKD	L P J	26.02.23	PART NO:FG-PZ2.54-2-NPW-S	
x.xx	±0.30	APVD	L Z W	26.02.23		
x.xxx	±0.10	UNIT:mm	SCALE:1:1	SIZE:A4	SHEET:1/1	
ANGLES	±3°					

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

FUGANG:

FG-TC-36R-01-5H FG-1.25-5PLT FG-PM2.0-1-04P-H4.3 FG-TC-06H-26-5H FG-1.25-12PWT FG-1.25-6PLT FG-PZ2.54-2-09P-SMT FG-TC-06C-08-5H FG-TC-06D-08-6H FG-1.25-4PLT RJ-056A-5 RJ-059-2-6 FG-1.25-12PLT FG-1.25-14PLT FG-1.25-9PWT FG-TC-06F-02-5H FG-TC-06H-09-5H TC-6615K-17.0-260 FG-PM1.27-2-06P-H4.3 FG-PM2.0-1-12P-H4.3 FG-PZ2.0-2-08P-S FG-TC-06H-06-5H FG-1.25-13PWT FG-1.25-2PWT FG-PM2.54-2-04P-S-H8.5 FG-TC-06H-29-5H FG-TC-36F-03-4.5H FG-1.25-7PWT FG-PM2.0-1-03P-H4.3 FG-TC-06H-09-7.3H