
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 15691, BS	02/24/09	BS

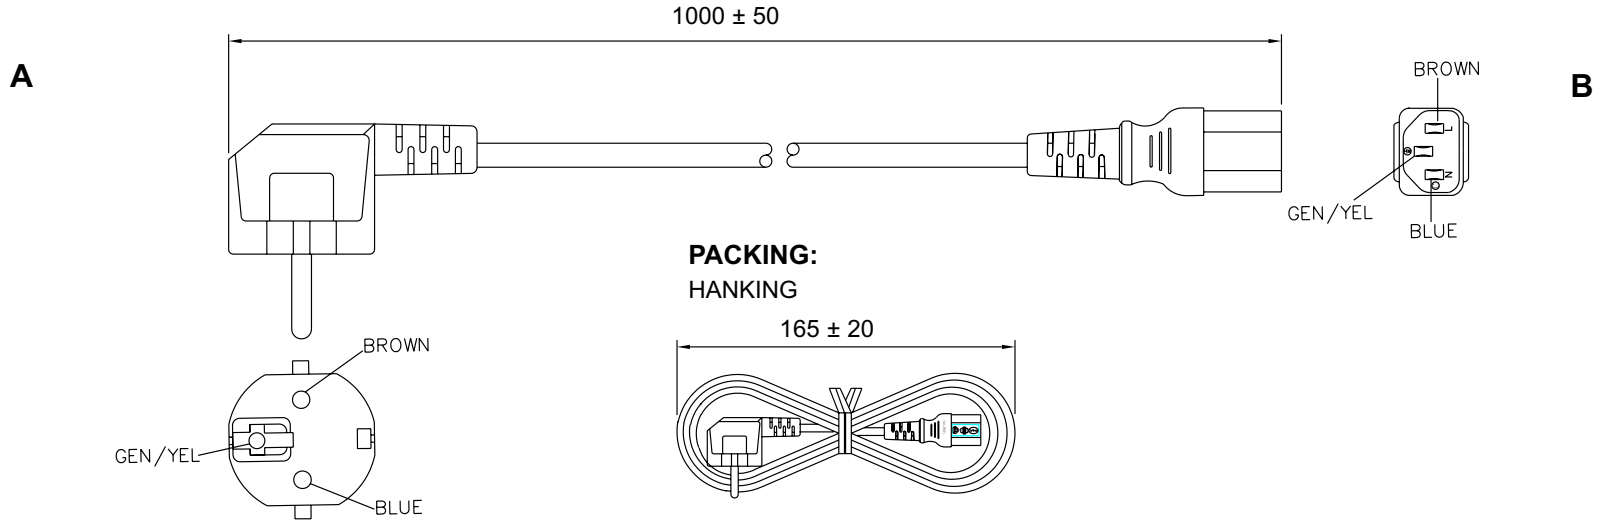

PACKING:
HANKING

GENERAL SPECIFICATIONS:

RATING:	10A / 250V AC
CABLE TYPE / SIZE:	H05VV-F, 3 x 1.0 mm^2
TEMPERATURE RATING:	70° C
CONDUCTOR COLORS:	BROWN / BLUE/ GREEN-YELLOW
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH (L):	1000 ± 50 mm
CABLE OUTER DIAMETER:	8.5 ± 0.2 mm
END 'A' PLUG;	CEE 7/7 RIGHT ANGLE
END 'B'	IEC-320 / C13
APPROVALS PLUG:	VDE, N, S, D, FI, KEMA, UTE, CEBEC, OVE, IMQ
APPROVALS CABLE:	VDE, N, S, D, FI, KEMA, CEBEC, OVE, SEV
APPROVALS CONNECTOR:	VDE, N, S, D, FI, KEMA, UTE, CEBEC, OVE, IMQ, SEV

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

TOLERANCES:
DECIMALS .xx +/- 0.1 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .xx +/- 0.3 .xxx +/- .013 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE: EUROPEAN POWER CORD

INIT.BY: BS	DATE: 02/24/09			
DRAWN: NF	DATE: 02/24/09	FSCN No.: G, CC	SIZE A	REV. A
APRVD: HM	DATE: 02/24/09	SCALE: NONE	PART NO: **23134271M0701(R)**	SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.