THERM-A-FORM™ CIP35

Thermally Conductive Cure-in-Place Compound



Customer Value Proposition:

Parker Chomerics THERM-A-FORM™ CIP35 is a thermally conductive silicone elastomer dispensable thermal interface material with a 3.5W/m-K thermal conductivity.

CIP35 is designed to cool electronics without excessive compressive force in sensitive cooling applications.

This versatile liquid can be hand or robotically dispensed and then cured into complex geometries for cooling of multi-height components on a printed circuit board (PCB) without the expense of a molded sheet.

CIP35 is available in ready-to-use cartridge systems, eliminating weighing, mixing, and degassing procedures.

This product has a thermal conductivity of 3.5 W/m-K and a hardness of 55 Shore A.



Features and Benefits:

- Dispensable form-in-place gap filling, potting, sealing, and encapsulating
- Excellent blend of high thermal conductivity, flexibility, and ease of use
- Conformable to irregular shapes without excessive force on components
- Ready-to-use cartridge system eliminates weighing, mixing, and de-gassing steps
- Variety of kit sizes and configurations available to suit any application (handheld twin-barrel cartridges, SEMCO® tubes, and pneumatic applicators)
- Vibration damping
- Long shelf life, no settling or degradation of cure
- Sag resistance, maintains shape during cure

Contact Information:
Parker Hannifin Corporation
Chomerics Division
77 Dragon Court
Woburn, MA 01801

phone 781 935 4850
fax 781 933 4318
chomailbox@parker.com

www.parker.com/chomerics

Parker Chomerics

ENGINEERING YOUR SUCCESS.

THERM-A-FORM CIP35 - Product Information

THERM-A-FORM CIP35 Cure-In-Place Thermal Compound			
Typical Properties		CIP35	Test Method
Physical	Color	Green	--
	Binder	Silicone	--
	Filler	Aluminum Oxide / Boron Nitride	---
	Number of Components	2 part	---
	Mix Ratio	1 : 1	---
	Specific Gravity	2.87	ASTM D792
	Hardness, Shore A	55	ASTM D2240
	Viscosity, poise	5000	Mod. ASTM D2196
	Pot Life, minutes	100	Time to 2X starting viscosity at 23°C
	Cure Cycles - for set up	30 min @ 150°C 180 min @ 100°C 48 hrs @ 23°C	Chomerics
Thermal	Thermal Conductivity, W/m-K	3.5	ASTM D5470
	Operating Temperature Range, °F (°C)	-67 to 392 (-55 to 200)	ASTM D5470
Electrical	Dielectric Strength, Kvac/mm (Vac/mil)	10 (250)	ASTM D149
	Volume Resistivity, ohm-cm	1.0×10^{14}	ASTM D257
Regulatory	RoHS Compliant	Yes	Chomerics
	Outgassing, %TML [%CVCM]	0.22 [0.06]	ASTM E595
	Flammability Rating (file E140244)	UL94-V0	UL 94
	Shelf Life	12 months	Chomerics

Ordering Information

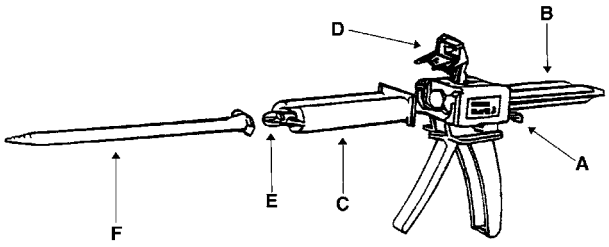


Figure 1: Typical Applicator

Part Number	Volume (mass)	Description
65-00-CIP35-0045	45 cc	1:1 Dual element Cartridge
65-00-CIP35-0200	200 cc	
65-00-CIP35-0400	400 cc	
65-00-CIP35-1200	1200cc	(2) 600cc SEMCO Cartridges
65-1P-CIP35-5600	5600cc	(2) 1 Gallon Pails, each side has 8kg
65-5P-CIP35-10452	10,452cc	(2) 5 Gallon Pails, each pail has 15kg

Mixpac® Dispensing Systems are available from multiple sources. When contacting Mixpac® equipment suppliers, reference cartridge volume (cc) and dual element cartridge A:B mix ratio. Refer to table for volume and mix ratio information.

MIXPAC is a trademark of ConProTec, Inc.
SEMCO is a trademark of PPG Aerospace.

www.parker.com/chomerics

CHOMERICS and THERM-A-FORM is a registered trademark of Parker Hannifin Corporation. ®

Parker Chomerics

ENGINEERING YOUR SUCCESS.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Parker Hannifin:

1CE48-8-4 H4-63-BSPP OSP-P16-00000-00500 OSPP250000004000000000000 SCM10-316 16TTP4XS 1D048-22-12 6 RTX-S VKA18CF 16M33C8OMXS 2304 5TTP4MXS ETM6-316 4R6MK4S 5C4OMXS 10M18C8OMXS 12-8C3MXS 1C948-30-16 934330 944439Q D3W020BNJW 1CF48-12-6 8C3MXS EPF2110QIBM3MG121 RAP3-112 M38SCFX P31KA00ESC RAP006.4X 14948-12-4 16J6MK4S