

UF12A series



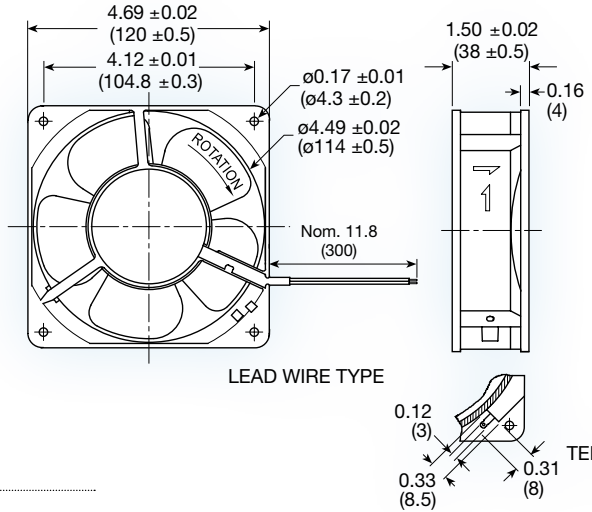

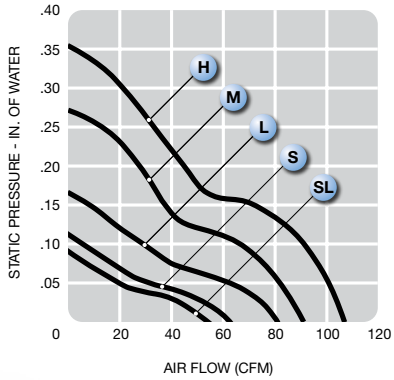

(120 x 120 x 38 mm)

4.69 x 4.69 x 1.5 inches

Operating voltage:	115 or 230 VAC
Construction:	aluminum die cast frame; UL94V-0 PBT impeller
Bearing option:	ball bearing or sintered bronze sleeve
Motor:	shaded pole
Air Flow:	exhaust over struts
Connection:	terminal or 22 AWG lead wire
Protection:	impedance
Option:	dual voltage 115/230VAC; IP55; IP55 + salt fog, tachometer output

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Locked Cur.	Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	HZ	W	A	A	RPM	M^3/Min.	CFM	MM	INCH	dbA	kg
UF12A12-_ _H	115	60	12	0.16	0.23	3,100	3.0	106	8.7	0.35	46	0.53
UF12A23-_ _H	230	60	15	0.08	0.12	3,100	3.0	106	8.7	0.35	46	0.53
UF12A12-_ _M	115	60	12	0.17	0.19	2,750	2.6	92	7.0	0.28	42	0.53
UF12A23-_ _M	230	60	15	0.08	0.09	2,750	2.6	92	7.0	0.28	42	0.53
UF12A12-_ _L	115	60	12	0.15	0.16	2,300	2.3	81	4.0	0.16	38	0.53
UF12A23-_ _L	230	60	15	0.07	0.08	2,300	2.3	81	4.0	0.16	38	0.53
UF12A12-_ _S	115	60	8	0.08	0.09	2,100	1.8	64	2.8	0.11	37	0.53
UF12A23-_ _S	230	60	8	0.04	0.05	2,100	1.8	64	2.8	0.11	37	0.53
UF12A12-_ _SL	115	60	6	0.06	0.07	1,800	1.6	57	2.3	0.09	36	0.53
UF12A23-_ _SL	230	60	6	0.03	0.04	1,800	1.6	57	2.3	0.09	36	0.53

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

MECHATRONICS:

MS2507M12D-RSR MXB9733H24B-BSR UF15KC12/23-BWHR UF25GC12-BTHR-B1 UF80B12-BWHR G8015L05B-RGR UF200BMB12-H2C2A B1232H24B-BSR G4010E12B1-RSR-WS UF15KC23-BWHNR E9225E24B-FSR G1238M48B2-FSR G1338S12B-FSR UF250APA12-H1C2A UF25GCB12-BTHR UF80A23-BTHR F1238X24B1-FHR-TTL F6025L12B-FHR G1238E12B1+6-FSR-WS G5015E12B-RSR MSI1967H24B1+7-BBR F8025H05B1-FSR E1225E12B2-FSR G1238L24B-FSR MA8025E12D-FSR MR8032H24B-FSR SGR-36 F8025X24B-FHR G9225X12B1-FSR M5210E12C-RSR