- **1N962BUR-1 thru 1N986BUR-1 AVAILABLE IN JAN, JANTX AND JANTXV PER MIL-PRF-19500/117**
- **ZENER DIODES**
- **LEADLESS PACKAGE FOR SURFACE MOUNT**
- **METALLURGICALLY BONDED**

1N962BUR-1 thru 1N986BUR-1 and CDLL957B thru CDLL986B

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C
DC Power Dissipation: 500mW @ T_{EC} = +125°C
Power Derating: 10 mW / °C above T_{EC} = +125°C
Forward Voltage @ 200mA: 1.1 volts maximum


ELECTRICAL CHARACTERISTICS @ 25°C

CDI TYPE NUMBER (NOTE 1)	NOMINAL ZENER VOLTAGE V_Z (NOTE 2)	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE (NOTE 3)			MAX. DC ZENER CURRENT I_{ZM}	MAX. REVERSE LEAKAGE CURRENT I_R @ V_R	
			Z_{ZT} @ I_{ZT}	Z_{ZK} @ I_{ZK}				
	VOLTS	mA	OHMS	OHMS	mA	mA	μA	VOLTS
CDLL957B	6.8	18.5	4.5	700	1.0	55	5.0	5.2
CDLL958B	7.5	16.5	5.5	700	.5	50	5.0	5.7
CDLL959B	8.2	15.0	6.5	700	.5	45	5.0	6.2
CDLL960B	9.1	14.0	7.5	700	.5	41	5.0	6.9
CDLL961B	10	12.5	8.5	700	.25	38	2.0	7.6
CDLL962B	11	11.5	9.5	700	.25	32	1.0	8.4
CDLL963B	12	10.5	11.5	700	.25	31	1.0	9.1
CDLL964B	13	9.5	13	700	.25	28	0.5	9.9
CDLL965B	15	8.5	16	700	.25	25	0.5	11
CDLL966B	16	7.8	17	700	.25	24	0.5	12
CDLL967B	18	7.0	21	750	.25	20	0.5	14
CDLL968B	20	6.2	25	750	.25	18	0.5	15
CDLL969B	22	5.6	29	750	.25	16	0.5	17
CDLL970B	24	5.2	33	750	.25	15	0.5	18
CDLL971B	27	4.6	41	750	.25	13	0.5	21
CDLL972B	30	4.2	49	1000	.25	12	0.5	23
CDLL973B	33	3.8	58	1000	.25	11	0.5	25
CDLL974B	36	3.4	70	1000	.25	10	0.5	27
CDLL975B	39	3.2	90	1000	.25	9.5	0.5	30
CDLL976B	43	3.0	93	1500	.25	8.8	0.5	33
CDLL977B	47	2.7	105	1500	.25	7.9	0.5	36
CDLL978B	51	2.5	125	1500	.25	7.4	0.5	39
CDLL979B	56	2.2	150	2000	.25	6.8	0.5	43
CDLL980B	62	2.0	185	2000	.25	6.0	0.5	47
CDLL981B	68	1.8	230	2000	.25	5.5	0.5	52
CDLL982B	75	1.7	270	2000	.25	5.0	0.5	56
CDLL983B	82	1.5	330	3000	.25	4.6	0.5	62
CDLL984B	91	1.4	400	3000	.25	4.1	0.5	69
CDLL985B	100	1.3	500	3000	.25	3.7	0.5	76
CDLL986B	110	1.1	750	4000	.25	3.3	0.5	84

NOTE 1 Zener voltage tolerance on "B" suffix is ± 5%. Suffix letter "A" denotes ± 10%. No Suffix denotes ± 20%. "C" suffix denotes ± 2%, and "D" suffix denotes ± 1%.

NOTE 2 Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of 25°C ± 3°C.

NOTE 3 Zener impedance is derived by superimposing on 1_{ZT} A 60Hz rms a.c. current equal to 10% of 1_{ZT}.

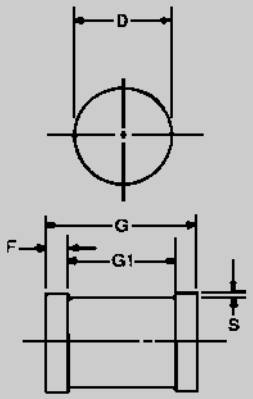

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
D	1.60	1.70	0.063	0.067
F	0.41	0.55	0.016	0.022
G	3.30	3.70	.130	.146
G1	2.54 REF.		.100 REF.	
S	0.03 MIN.		.001 MIN.	

FIGURE 1

DESIGN DATA

CASE: DO-213AA**,** Hermetically sealed glass case. (MELF, SOD-80, LL34)

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: ($R_{\Theta JEC}$): 100 °C/W maximum at L = 0 inch

THERMAL IMPEDANCE: (Z_{JX}): 35 °C/W maximum


POLARITY: Diode to be operated with the banded (cathode) end positive.

MOUNTING SURFACE SELECTION: The Axial Coefficient of Expansion (COE) Of this Device is Approximately +6PPM/°C. The COE of the Mounting Surface System Should Be Selected To Provide A Suitable Match With This Device.

Microsemi

6 LAKE STREET, LAWRENCE, MASSACHUSETTS 01841
PHONE (978) 620-2600 FAX (978) 689-0803
WEBSITE: http://www.microsemi.com

FIGURE 2

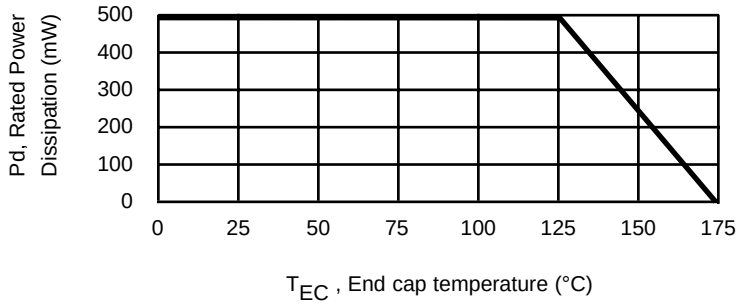

POWER DERATING CURVE

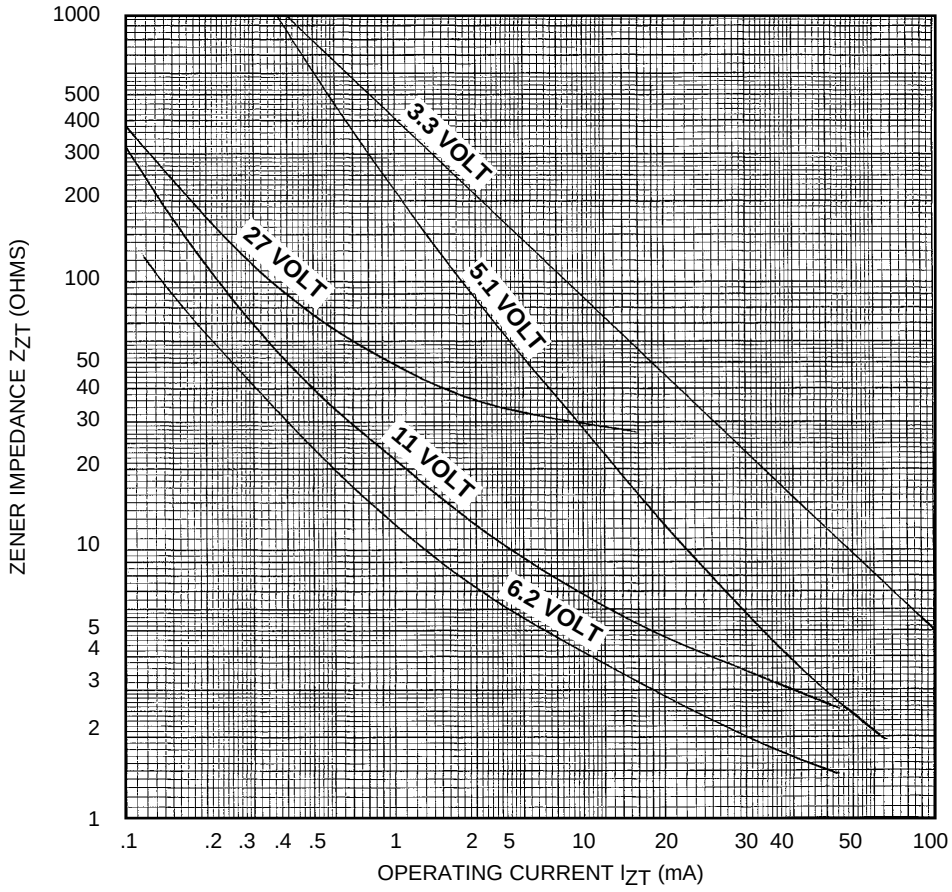


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Microchip Technology:

MCP2561T-E/SN MIC5503-1.8YMT-TR ATTINY84A-SSFR MCP4361T-503E/ST MCP4461-502E/ML
USB2514B-AEZC-TR AT89C2051-24SU ATTINY88-MMU MIC5365-1.2YC5-TR MIC5366-1.8YC5 TR
MIC5504-3.3YMT TR 93AA56CT-I/SN AT25256B-XHL-B ATTINY13A-MMU MCP2515-E/P
MIC4424YWM-TR MIC4607A-2YML-TRVAO DSC1001CI2-012.0000 KSZ8463FRLI TC4428EUA 25C040-I/P
ATMEGA169PA-AUR MIC5365-3.3YC5 TR USB2514BT/M2 25AA320AT-I/MS AT93C86A-10TU-2.7
MCP73834T-FCI/MF 1N825AE3 MIC47050-1.2YML-TR KSZ8721CL