





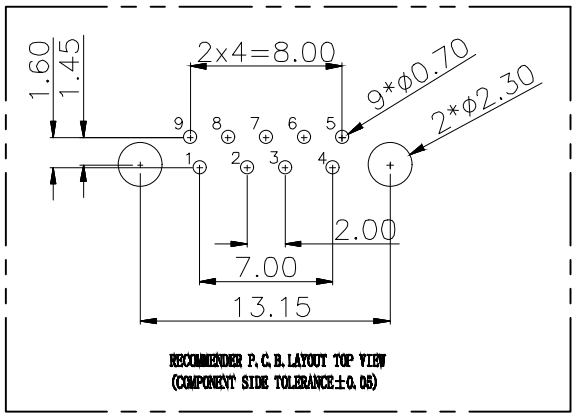

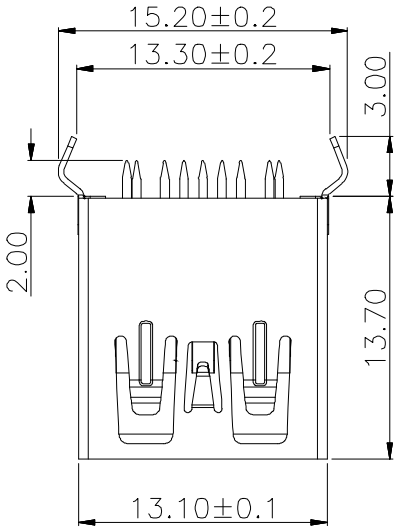


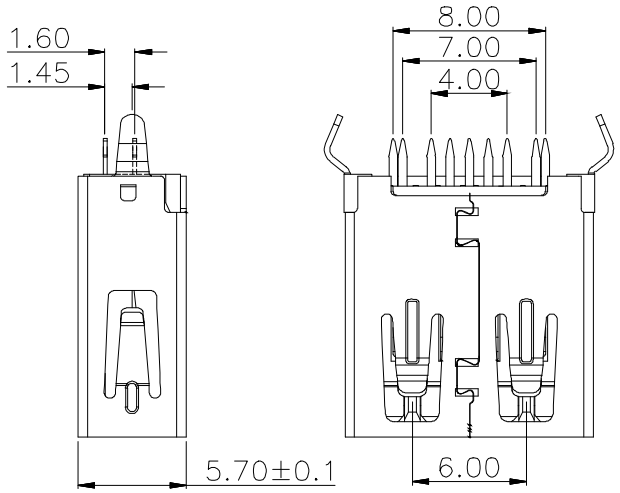



NOTES:

1. MATERIAL:
   - 1.1. HOUSING: LCP ,COLOR IS BLUE,HIGH TEMPERATURE PLASTIC;
   - 1.2. CONTACT: BRASS(H65 T=0.20&0.25mm);
   - 1.3. SHELL: COLD ROLLED IRON (SPCC T=0.30mm);
2. ELECTRICAL:
   - 4.1. VOLTAGE RATING: 30V DC ;
   - 4.2. CURRENT RATING: 1.5A ;
   - 4.3. CONTACT RESISTANCE: 30MILLIOHMS MAX.;
   - 4.4. WITHSTAND VOLTAGE: 100V AC RMS 50(60)Hz,1MIN.;
   - 4.5. INSULATION RESISTANCE: 100MEGOHMS MIN @500V DC;
5. MECHANICAL:
   - 5.1. MATING FORCE: 35N MAX.;
   - 5.2. UNMATING FORCE: 5~35N ;
   - 5.3. OPERATING LIFE: 1500 CYCLES MIN.;
6. PLATING:
   - 6.1. TERMINAL:
     - NI PLATING OVER ALL,
     - Tin PLATING ON SOLDER AREA,
     - Au G/Fu" ON CONTACT AREA;
   - 6.2.SHELL: NI PLATING OVER ALL;
7. ENVIRONMENTAL:
   - 7.1. STORAGE TEMPERATURE RANGE: -40°C~+85°C;
   - 7.2. OPERATION TEMPERATURE RANGE: -25°C~+70°C;



PIN NUMBER	SIGNAL NAME
PIN 1	Vbus
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	StdA_SSRX-
PIN 6	StdA_SSRX+
PIN 7	GND_DRAIN
PIN 8	StdA_SSTX-
PIN 9	StdA_SSTX+
SHELL	GND

序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE
1	初版发行	

GENERL TOLERANCE

DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

制 图 DRAWING	
审 核 CHECK	
批 准 APPROVAL	
比 例 SCALE	
投 影 Projection	

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称 TITLE	TYPE AF 9P 3.0 180° L13.7mm 弯脚 平口	版 本 REV.	A
产品料号 PART NO.	HC-ST-003-07-Z	单 位 UNITS	mm
材 料 MATERIAL		页 次 SHEET	1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

HCTL:

HC-PHD-2*5Y HC-PH-7AWT HC-HY-8AW HC-FPC-05-09-28RLTAG HC-PHB-2*11AW-05
PM200-1-18-W-4.3 PM254-2-25-WS-8.5 PZ127-2-16-Z TC-6601-4.3-260G HC-GH-7PWT HC-PH-6AW-G
PM254-1-11-W-8.5 CT05202-240R-00-D HC-1.25-5Y HC-FPC-03-10-29RLTAG HC-PH-8Y HC-ZH-6Y
PM127-1-10-4.3-G0 PZ200-1-06-Z-C PZ254-1-09-Z-C HC-FPC-03-10-71RLTAG HC-FPC-05-LT-28RLTAG
PM127-1-04-4.3-G0 PM127-2-19-Z-4.3-G0 PZ200-2-14-W PZ200-2-17-Z-C TC-0513-5-260G
HC-FPC-03-09-23RLTAG HC-ZH-8Y PZ254-2-13-Z-C