


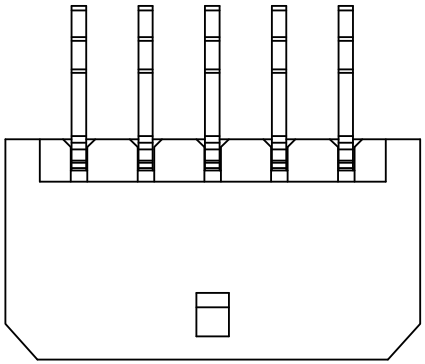


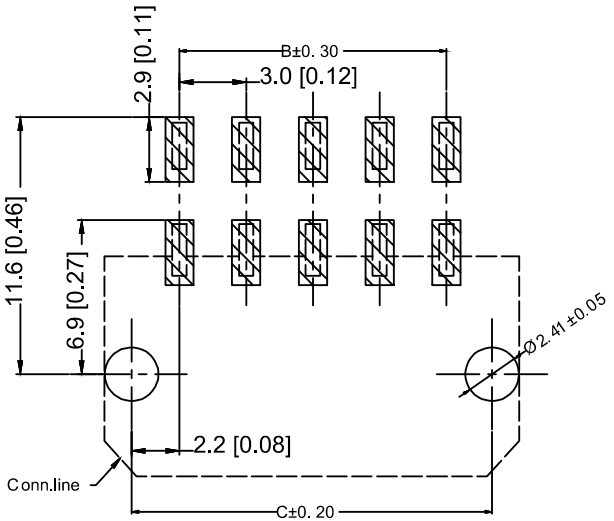

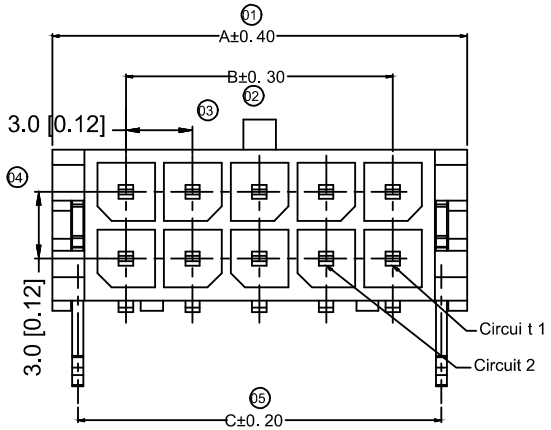

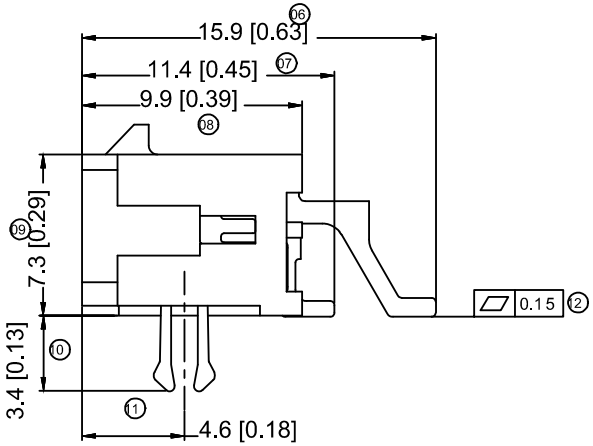

Specifications

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000M Ω
- Contact resistance: ≤10m Ω
- After environmental testing : ≤20mΩ

X3025WRS-2x04C-LPSW
01 02 03 04 05 06 07 08 09

01 Series No.
02 Category : W-wafer
03 Welding Board Angle: R-90°
04 Welding Way: S-SMT
05 Row No.-Pin No.: 2*XX-Double row
06 Special N0.: C-The harpoon
07 Material : LP-LCP 94V-0
N0-PA66 94V-0
08 Planting Category:
SN-Bright tin plating 70u"
SW-Fog Tin plating
09 Color :
Blank-natural color

Poles	Dimensions(mm)		
	A	B	C
2*01	6.65	---	4.20
2*02	9.65	3.00	7.20
2*03	12.65	6.00	10.20
2*04	15.65	9.00	13.20
2*05	18.65	12.00	16.20
2*06	21.65	15.00	19.20
2*07	24.65	18.00	22.20
2*08	27.65	21.00	25.20
2*09	30.65	24.00	28.20
2*10	33.65	27.00	31.20
2*11	36.65	30.00	34.20
2*22	39.65	33.00	37.20

X3025WRS-2x04C-LPSW	LCP UL 94V-0	Brass	Ni:50u"Min; Sn:120u"Min;	Brass	Matte Tin Plating	X3025H
X3025WRS-2x04C-LPSW					Tin-Plated	
X3025WRS-2x04C-N0SN	PA66 UL 94V-0					
PART N0	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With XKB Housing

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				XKB
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°	
L≤4	±0.2	
4<L≤16	±0.3	
16<L≤63	±0.4	
L>63	±0.5	

UNSPECIFIED TOLERANCES

www.helloxkb.com

DSND		DATE		SCALE: N/A	MODEL TYPE: 3.00 mm Crimp Style Connectors
DWN		DATE		VIEW:	PART NO.: X3025WRS-2x04C-LPSW
CHKD		DATE		UNIT: mm/in	DWG NO.: X-X3025WRS-2x04C-LPSW
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0