
THERMALTRONICS

Check for latest datasheet

# S75CH008 Datasheet

## Technical Specifications

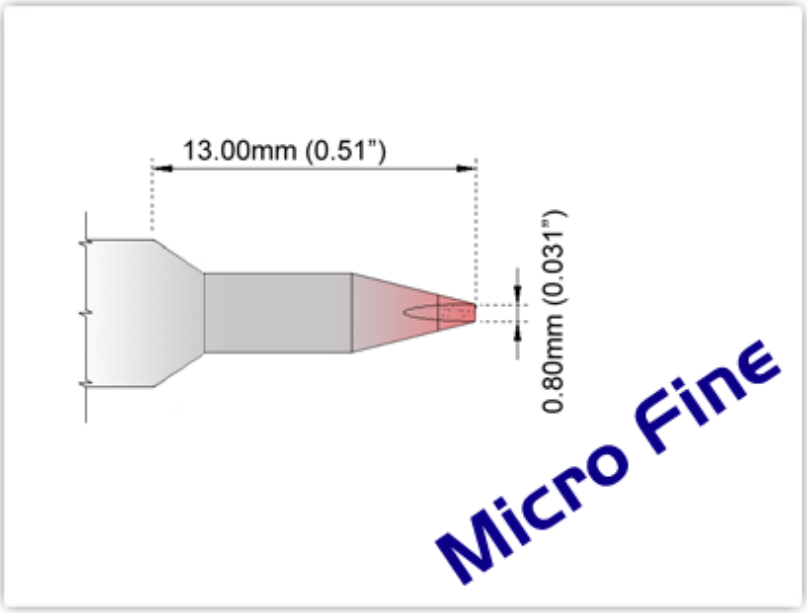


**S75CH008**

***Chisel 30° 0.8mm (0.031"), Micro Fine***


Tip Style: Chisel
Tip Width: 0.80mm (0.03")
Tip Length: 13.00mm (0.51")

| | |
|---|---|
| 75 Type Cartridge[1]: | 350°C - 398°C |
| RoHS Compliant[2] / Lead Free: | YES |
| For Use With: | TMT-2000PS, SP200, MFR-PS1100, MFR-PS2200 (SSC Tips) |

## Material Composition

**Patented Color Band**

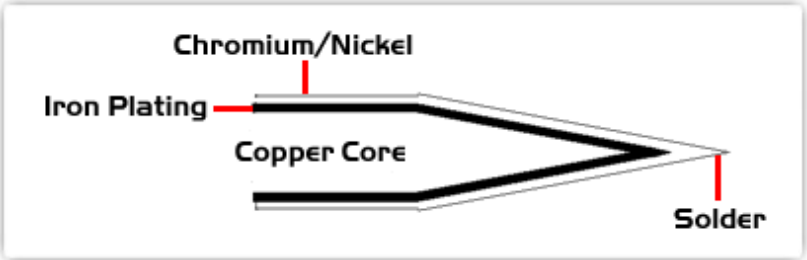


***All components are RoHS compliant and Lead-Free.***

1 Thermaltronics tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Thermaltronics offers a wide variety of tip geometries from 0.25mm fine point tip to 5mm chisel. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method, technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

2 Please refer to http://www.rohs.gov.uk for details on RoHS Compliance.

Copyright © 2010-2015 Thermaltronics All Rights Reserved

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## THERMALTRONICS:

K75DT006 M7CS152H SHP-1 SHP-K K60DT006 M75DT004 M8B325 M8CH178 S75C001 S75CH010 M7CP200 M7CS155 S75CS010 K75CH025 K80CH050 M8CP200 S75BV004 TMT-2000S-SM M7CP303 M7CS151H M8CB226 PM75SB276 M8CS152 M8LR400 PM75C300 M7CH178 M7B325 M7SB275 PM75CH176 S75MF003