

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

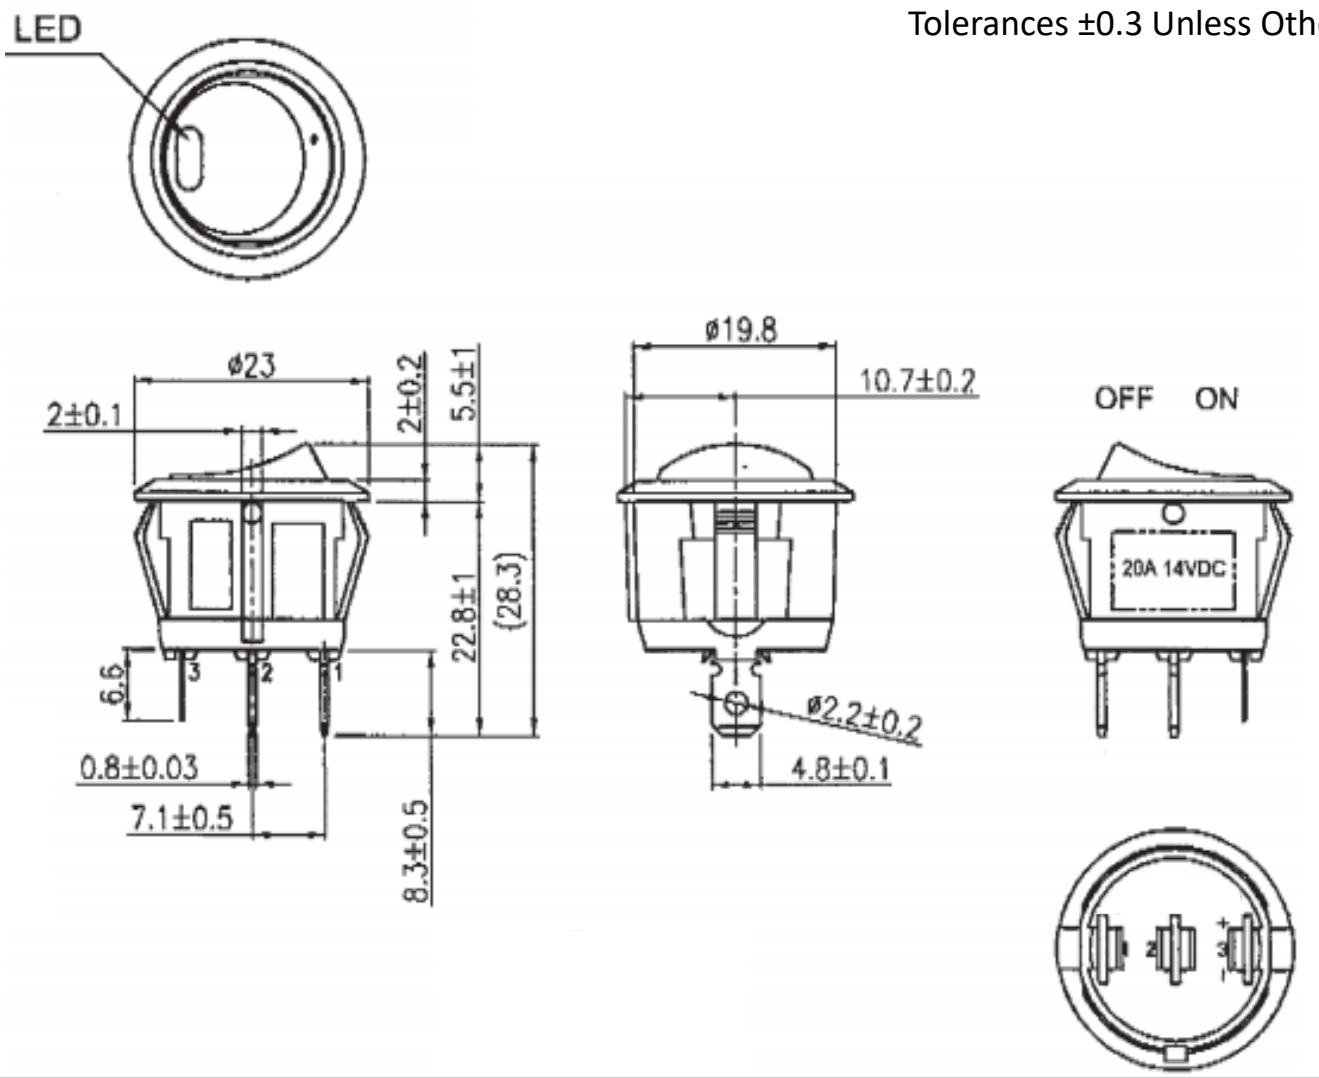


Mounting Hole

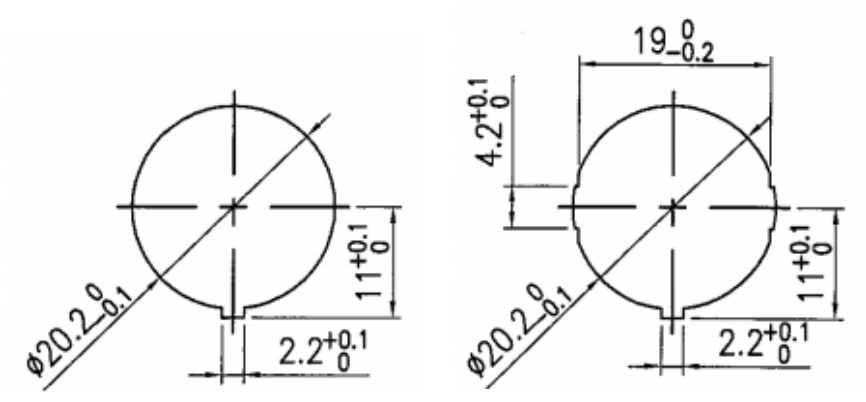

Thickness: 2.0~3.0 Thickness: 0.7~3.0

Circuit Diagram

4P SPST OFF-ON (LED-I)

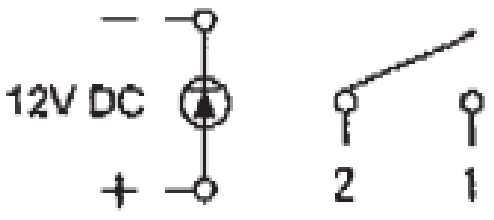

Electrical Specifications

Rating	20A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon 66 (94-V2)
Actuator	Black, Nylon 66 (94-V2)
Terminals	Copper alloy, Silver plating
Lens	Yellow, PC
LED	Yellow (Independent)

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

PB-1B-DC-2-RIL RD2-1A-DC-1-AL SB-1B-DC-3-R SRB1-1G-DC-1-NN TA2-1A-DC-5 TA2-1G-DC-6-O RC-1A-DC-1-AL SRD2-2F-DC-1-RNN TA1-1A-DC-4 RA4-2A-DC-2-AL SB-1B-DC-3-B SRD1-2A-DC-1-BGN WR1 RF3-1A-DC-2-GL SRA1-2F-DC-1-NN SRC1-1B-DC-1-B PD-1E-DC-9-UL SRA1-1A-DC-1-NN-2 SRD2-1G-DC-1-BNN PB-1A-DC-2-B PB-1A-DC-2-RDL SC-B TB1-2H-DC-6 TE1-1F-DC-1-PB RF1-1A-DC-2-B-3 SRD2-2F-DC-1-BNN TC6-P1-Z TE6-1A-DC-1-UL RG3-1A-DC-1-B TE3-1A-DC-1-AL