




Pin NUMBER	SIGNAL NAME
1	VBUS
2	D−
3	D+
4	GND
5	StdB_SSTX−
6	StdB_SSTX+
7	GND_DRAIN
8	StdB_SSRX−
9	StdB_SSRX+
Shell	Shield


NOTES:

1.MATERIAL:
- 1.1 HOUSING: HIGIH TEMPERATURATURE THERAL PLASTIC.
- 1.2 BACK SHELL:STEEL.
- 1.3 SPRING CONTACT: COPPER ALLOY.
- 1.4 FLAT CONTACT;COPPER ALLOY
- 1.5 SHELL :COPPER ALLOY.


2.FINISH:
- 2.1 CONTACT: (SEE P/N.),[50μ"] MIN. NICKEL UNDERPLATING OVER ALL.
- 2.2 SHELL: [50μ"] MIN.SOLDERABLITY NICKEL UNDERPLATING OVER ALL.
- 2.3 BACK SHELL;PLATING WHITOUT.

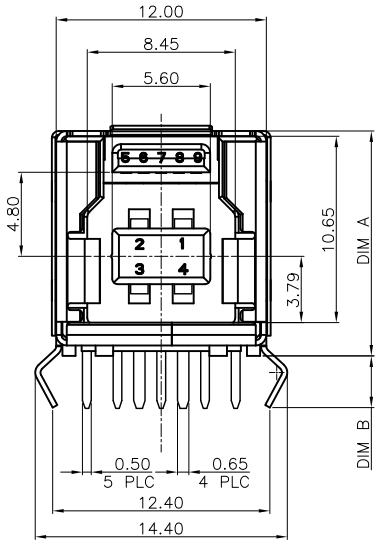

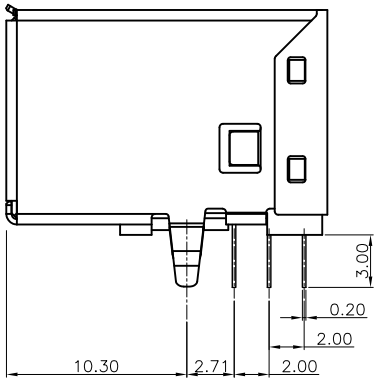

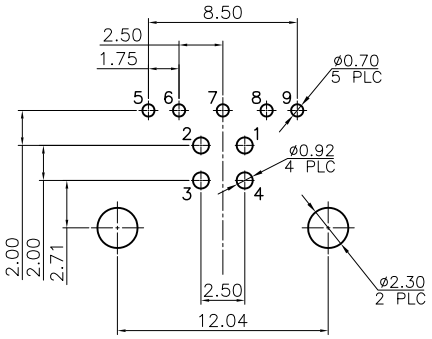

RECOMMEND P.C.B LAYOUT COMPONENT SIDE
DEFAUET TOLERANCES:±0.05 (PCB T=1.6mm)

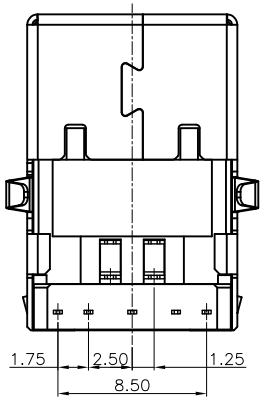

DIM B	DIM A	ITEM
2.9	12.9	03
3.2	12.6	02
3.5	12.4	01

深圳市万骏达电子有限公司 http://www.wanjunda.com	
品名(ITEM NO)	USB 3.0, B TYPE, R/A,DIP,CONNECTOR.
料号(PART NO)	USB2.0-BF-WCS-JB
模号(MODEL NO)	

图号(DWG NO)		单位(UNIT): MM
本(REV)		比例(SCALE) 1:1
日期(DATE)		
设计(DESIGN)		未注公差 TOLERANCE UNSPECIFIED
审核(CHECKED)		X.X ±0.30 X.XX ±0.15 X.XXX ±0.10 X° ±5° X.X° ±2°
核准(APPROVED)		