




| REVISIONS | | | | | |
|---|---|---|---|---|---|
| REV. | ECN NO. | LOCATION | DESCRIPTION | DATE | DESIGN |
| A0 | N/A | | INITIAL RELEASE | / | / |
| A1 | N/A | | 图面升级整理图面 | 2024.08.06 | 阿树 |

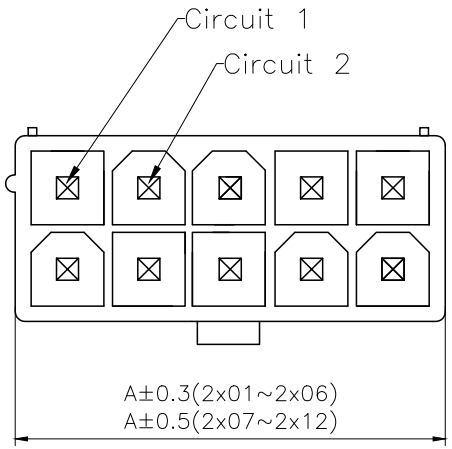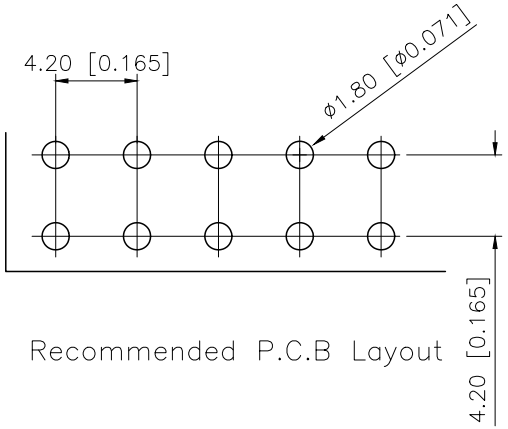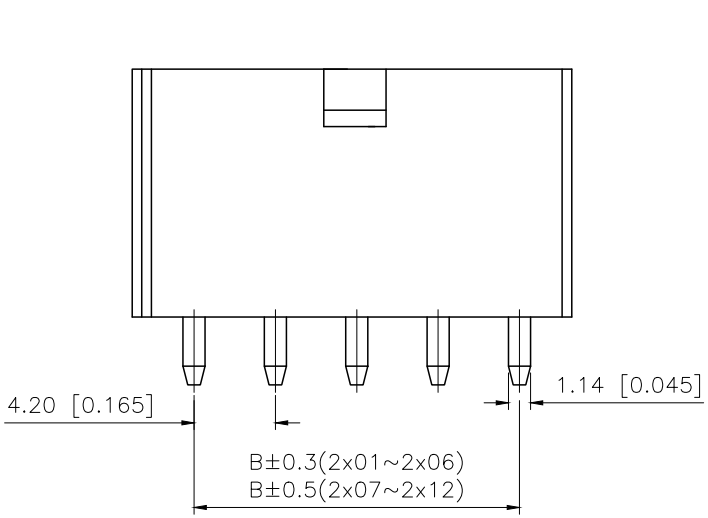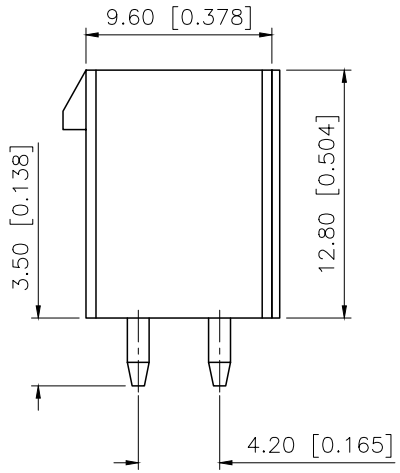

■SPECIFICATIONS
- Voltage rating:600V AC/DC
- Current rating:9A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:−45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing:≤20mΩ
- Color:White

PART NO.:

X9357 W V−2x11−N0 SN
① ② ③ ④ ⑤ ⑥

①Series No
②Category:W−Wafer
③Welding Board Angle:V−Straight 180°
④Row No−Pin No：2xXX−2x01P~2x12P
⑤Material: N0−PA66 94V−0;
N2−PA66 94V−2
⑥Plating Category: SN−Bright Tin Plating
V01−Plating Gold Flash

| Poles | Dimensions(mm) | | Poles | Dimensions(mm) | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2x01 | 5.40 | —— | 2x07 | 30.60 | 25.20 |
| 2x02 | 9.60 | 4.20 | 2x08 | 34.80 | 29.40 |
| 2x03 | 13.80 | 8.40 | 2x09 | 39.00 | 33.60 |
| 2x04 | 18.00 | 12.60 | 2x10 | 43.20 | 37.80 |
| 2x05 | 22.20 | 16.80 | 2x11 | 47.40 | 42.00 |
| 2x06 | 26.40 | 21.00 | 2x12 | 51.60 | 46.20 |

| PART NO | Material | Material(Pin) | Suitable XKB Housing |
|---|---|---|---|
| X9357WV−2x11−N0SN | PA66 UL94V−2 | Brass | X9357HM |

| AuGLAR | ±5° |
|---|---|
| X. | ±0.40 |
| X.x | ±0.30 |
| X.xx | ±0.20 |
| X.xxx | ±0.15 |
| UNSPECIFIED TOLERAuCES | |

XKB Connection 星标

| | | | |
|---|---|---|---|
| DESIGN | 阿树 | VIEW: | MODEL TYPE: 4.20 mm Crimp Style Connectors |
| CHECKED | | UNIT: mm/in | PART NO.: X9357WV−2x11−N0SN |
| APPROVED | | SIZE: A4 | DWG NO.: X−X9357WV−2x11−N0SN |

XKB INDUSTRIAL PRECISION CO.,LIMITED

| SCALE | PAGE | REVISION |
|---|---|---|
| N/A | 1/1 | A1 |