Alchip™-MZR Upgrade! Series

- Downsizing and Lower ESR, 2,000hours at 105℃
- Rated voltage range : 6.3 to 50V, Nominal capacitance range : 22 to 2,200μF
- Solvent resistant type(see PRECAUTIONS AND GUIDELINES)
- Vibration resistance structure
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.

MZR
↑ Downsized
MZJ




◆SPECIFICATIONS

Items	Characteristics							
Category Temperature Range	-55 to +105℃							
Rated Voltage Range	6.3 to 50Vdc							
Capacitance Tolerance	±20% (M)							(at 20℃, 120Hz)
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)							(at 20℃ after 2 minutes)
Dissipation Factor (tan δ)	Rated voltage (Vdc)	6.3V	10V	16V	25V	35V	50V	
	tan δ (Max.)	0.26	0.19	0.16	0.14	0.12	0.10	(at 20℃, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (Vdc)	6.3V	10V	16V	25V	35V	50V	
	Z(-25℃)/Z(+20℃)	2	2	2	2	2	2	
	Z(-40℃)/Z(+20℃)	3	3	3	3	3	3	
	Z(-55℃)/Z(+20℃)	4	4	4	3	3	3	(at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage is applied for 2,000 hours at 105℃.							
	Capacitance change	≦±30% of the initial value						
	D.F. (tan δ)	≦200% of the initial specified value						
	Leakage current	≦The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.							
	Capacitance change	≦±30% of the initial value						
	D.F. (tan δ)	≦200% of the initial specified value						
	Leakage current	≦The initial specified value						
Surge Voltage Test	The capacitors shall be subjected to 1,000 cycles each consisting of charging with the specified surge voltage for 30±5 seconds through a protective resistor (as required for RC=0.1±0.05sec) and open-circuiting for 5.5 minutes at a room temperature of 15 to 35℃.							
	Rated voltage (Vdc)	6.3	10	16	25	35	50	
	Surge voltage (Vdc)	7.2	12	18	29	40	58	
	Appearance	No significant damage						
	Capacitance change	≦±20% of the initial value						
	D.F. (tan δ)	≦200% of the initial specified value						
	Leakage current	≦The initial specified value						
	(Caution) Surge Voltage Test intends to evaluate capacitors in durability of an exceptional excessive voltage under specific conditions.It does not imply long-term use at all.							


◆DIMENSIONS [mm]

- Terminal Code : A
- Size code : E61 to JA0

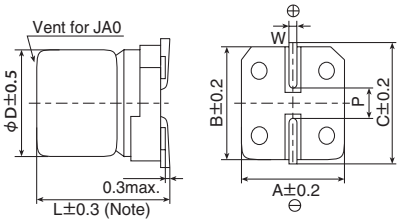

Note : L±0.5 for HA0 and JA0

- Terminal Code : G(Vibration resistant structure)
- Size code : F61 to JA0

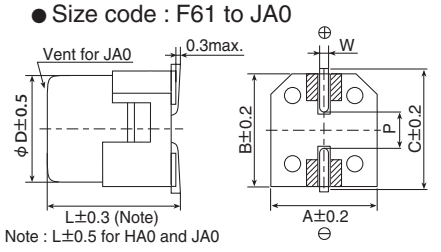


Note : L±0.5 for HA0 and JA0

▨ : Dummy terminals

Size code	D	L	A	B	C	W	P
E61	5	5.8	5.3	5.3	5.9	0.5 to 0.8	1.4
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆MARKING

EX) 35V330μF



- Rated voltage symbol


Rated voltage (Vdc)	6.3	10	16	25	35	50
Symbol	j	A	C	E	V	H

Applying voltage over the rated voltages causes the capacitors to have short lifetime.
Besides, applying voltage over the specified surge voltages may cause to have short circuit failure. A protection circuit should be used if applied voltage will exceed the rated voltages.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

Alchip™-MZR Upgrade! Series

◆PART NUMBERING SYSTEM

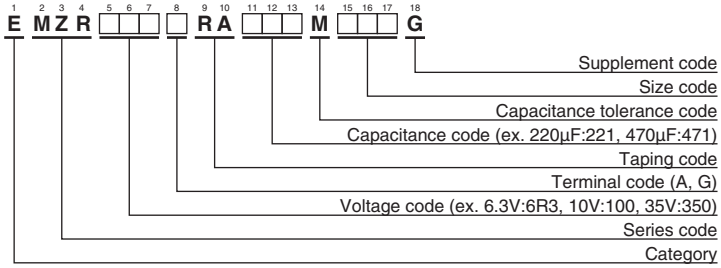

Please refer to "Product code guide (surface mount type)"

◆STANDARD RATINGS

WV (V_{dc})	Cap (μF)	Size code	tan δ	ESR (Ω max./20℃, 100kHz)	Rated ripple current (mArms/105℃, 100kHz)	Part No.
6.3	220	E61	0.26	0.36	240	EMZR6R3ARA221ME61G
	330	F61	0.26	0.26	300	EMZR6R3□RA331MF61G
	680	F80	0.26	0.16	600	EMZR6R3□RA681MF80G
	1,500	HA0	0.26	0.08	850	EMZR6R3□RA152MHA0G
	2,200	JA0	0.26	0.06	1,190	EMZR6R3□RA222MJA0G
10	150	E61	0.19	0.36	240	EMZR100ARA151ME61G
	220	F61	0.19	0.26	300	EMZR100□RA221MF61G
	470	F80	0.19	0.16	600	EMZR100□RA471MF80G
	1,000	HA0	0.19	0.08	850	EMZR100□RA102MHA0G
	1,500	JA0	0.19	0.06	1,190	EMZR100□RA152MJA0G
16	100	E61	0.16	0.36	240	EMZR160ARA101ME61G
	220	F61	0.16	0.26	300	EMZR160□RA221MF61G
	330	F80	0.16	0.16	600	EMZR160□RA331MF80G
	680	HA0	0.16	0.08	850	EMZR160□RA681MHA0G
	1,000	JA0	0.16	0.06	1,190	EMZR160□RA102MJA0G
25	68	E61	0.14	0.36	240	EMZR250ARA680ME61G
	100	F61	0.14	0.26	300	EMZR250□RA101MF61G
	220	F80	0.14	0.16	600	EMZR250□RA221MF80G
	470	HA0	0.14	0.08	850	EMZR250□RA471MHA0G
	820	JA0	0.14	0.06	1,190	EMZR250□RA821MJA0G
35	47	E61	0.12	0.36	240	EMZR350ARA470ME61G
	100	F61	0.12	0.26	300	EMZR350□RA101MF61G
	150	F80	0.12	0.16	600	EMZR350□RA151MF80G
	330	HA0	0.12	0.08	850	EMZR350□RA331MHA0G
	560	JA0	0.12	0.06	1,190	EMZR350□RA561MJA0G
50	22	E61	0.10	0.88	165	EMZR500ARA220ME61G
	47	F61	0.10	0.68	195	EMZR500□RA470MF61G
	100	F80	0.10	0.34	350	EMZR500□RA101MF80G
	220	HA0	0.10	0.18	670	EMZR500□RA221MHA0G
	330	JA0	0.10	0.12	900	EMZR500□RA331MJA0G

□ : Enter the appropriate terminal code.

◆RATED RIPPLE CURRENT MULTIPLIERS

❶Frequency Multipliers

Capacitance(μF) \ Frequency(Hz)	120	1k	10k	100k
22 to 150	0.40	0.75	0.90	1.00
220 to 560	0.50	0.85	0.94	1.00
680 to 2,200	0.60	0.87	0.95	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5℃ rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Nippon Chemi-Con:

EGPA350ELL122ML20S EKY-101ETD221MK25S EKY-500ELL471MJ30S EMZA630ARA301MKG5S APXA6R3ARA471MJ80G EGXF630ELL391MK20S EKMR401VSN681MR50S EKXJ401ELL121MMN3S EKZN350ELL471MJ20S EGXF500ELL751MK25S EKMQ201VSN152MR40S EKY-250ELL331MJC5S ESMQ401VSN181MP35S EKMG101ELL470MJC5S EKMG160ELL682MLN3S EKMS161VSN332MA50S EKYA500ELL222MLP1S EKZE101ELL101MK16S ELXZ630ELL152MM35S EMVY160ARA100MD55G EKXG351ELL151MMP1S EKXJ401ELL680ML25S EKY-101ELL101MK16S EKYA100ELL331MF11D EKYB250ELL102MJ20S EMVE101ARA470MKE0S HHXC500ARA470MHA0G EGPD250ELL302MK25H EKMG251ELL101MLN3S EKMQ401VSN151MQ25S