



RoHS

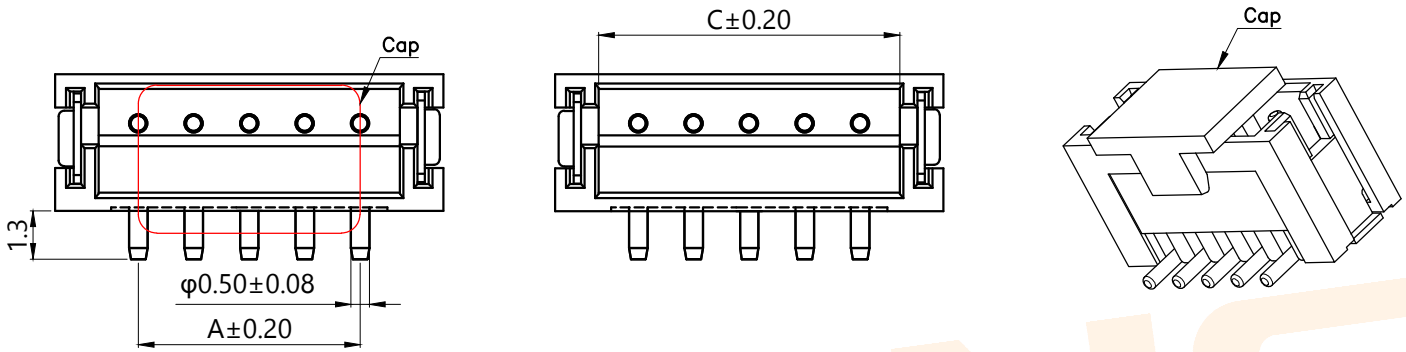

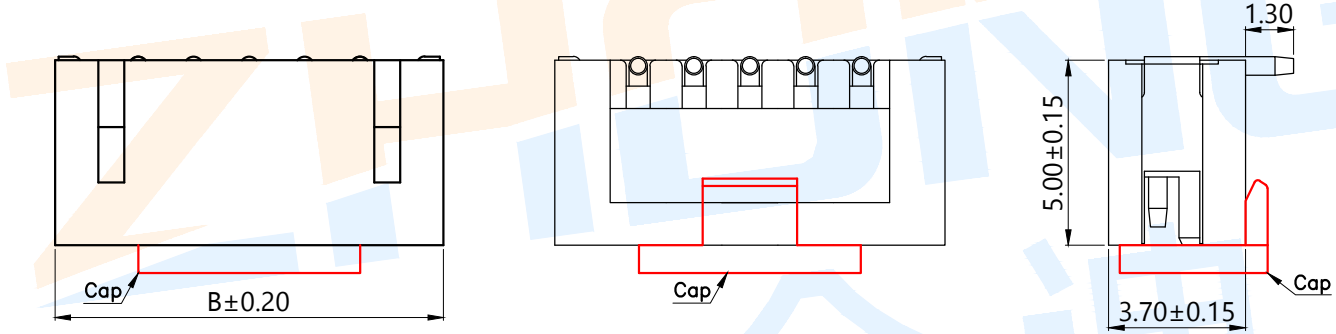

Model No.	Pin	A	B	C
WAFER-ZH1.5-2PLT-W1	2	1.50	6.00	3.65
WAFER-ZH1.5-3PLT-W1	3	3.00	7.50	5.15
WAFER-ZH1.5-4PLT-W1	4	4.50	9.00	6.65
WAFER-ZH1.5-5PLT-W1	5	6.00	10.50	8.15
WAFER-ZH1.5-6PLT-W1	6	7.50	12.00	9.65
WAFER-ZH1.5-7PLT-W1	7	9.00	13.50	11.15
WAFER-ZH1.5-8PLT-W1	8	10.50	15.00	12.65
WAFER-ZH1.5-9PLT-W1	9	12.00	16.50	14.15
WAFER-ZH1.5-10PLT-W1	10	13.50	18.00	15.65
WAFER-ZH1.5-11PLT-W1	11	15.00	19.50	17.15
WAFER-ZH1.5-12PLT-W1	12	16.50	21.00	18.65
WAFER-ZH1.5-13PLT-W1	13	18.00	22.50	20.15
WAFER-ZH1.5-14PLT-W1	14	19.50	24.00	21.65
WAFER-ZH1.5-15PLT-W1	15	21.00	25.50	23.15
WAFER-ZH1.5-16PLT-W1	16	22.50	27.00	24.65
WAFER-ZH1.5-17PLT-W1	17	24.00	28.50	26.15
WAFER-ZH1.5-18PLT-W1	18	25.50	30.00	27.65
WAFER-ZH1.5-19PLT-W1	19	27.00	31.50	29.15
WAFER-ZH1.5-20PLT-W1	20	28.50	33.00	30.65
WAFER-ZH1.5-□□PLT-W1(-P=盘装, 非盘装不启用)				

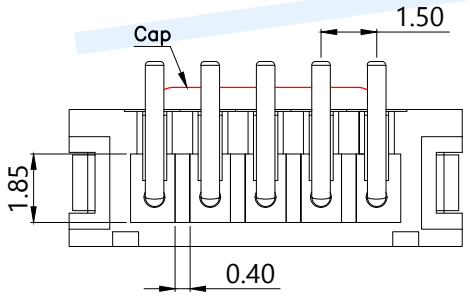

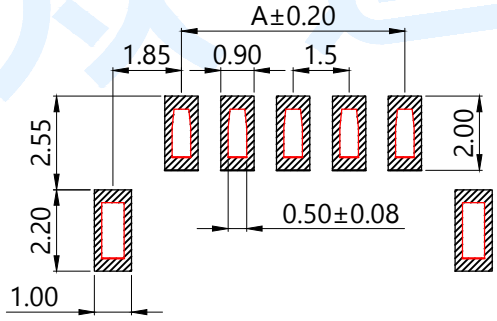

适用线路板(PCB LAYOUT)

Specifications/技术规格:

1.Poles/线数：2～20P
2.Wire range/适用线规：AGW 32#～26#
3.Applicable PC board thickness/ 适用PC板厚度：0.6～1.2mm
4.Current rating/额定电流：1.0A
5.Voltage rating/额定电压：100V AC/DC
6.Insulation Resistance/绝缘电阻：500MΩ Min
7.Dielectric Withstanding/ 耐电压：500V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓒ	Soldering lug		1	Brass	Plating Sn
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	LCP	Off White

Zhongdi Electronic Technology Co., Ltd

								angle	±2°		design		date		name	WAFER CONNECTOR	
								10~30	±0.30		Review		date				
								5~10	±0.20		Approved		date		model	WAFER-ZH1.5-□□PLT-W1	
								~ 5	±0.10	Drawing number:							
				modify		Review		Approved	Tolerance not specified	Proportion	1:1	unit	mm	gape number		A4	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-SH1.0-11PLT-W1-P WAFER-ZH1.5-2PWT-W1-P WAFER-HY2.0-4PWT-W1-P
WAFER-MX1.25-2PWZ-C22-9T WAFER-SUR0.8-12PWT-W1-P WAFER-SUR0.8-4PLT-W1-P
WAFER-ZH1.5-12PWT-W1-P WAFER-GH1.25-12PLT-W1-P WAFER-HY2.0-10PWT-W1-P
WAFER-TJC8-2.54-12PZZ WAFER-VH3.96-3PWT-W1-P WAFER-SH1.0-6PWT-W1-P
WAFER-SH1.0-8PWT-W1-P WAFER-SUR0.8-14PWT-W1-P WAFER-XH2.54-12PWT-W1-P
WAFER-MX1.25-5PZZ-C22-9T WAFER-PH2.0-2PWT-W1-P WAFER-VH3.96-5PWT-W1-P
WAFER-ZH1.5-4PLT-W1-P WAFER-HY2.0-7PWT-W1-P WAFER-SHB1.0-13PLT-W1-P
WAFER-TJC8-2.54-2PWZ WAFER-GH1.25-14PWT-W1-P WAFER-MX1.25-4PWZ-C22-9T
WAFER-SHB1.0-8PWT-W1-P WAFER-XHB2.54-7PWT-W1-P WAFER-ZH1.5-2PLT-W1-P
WAFER-HY2.0-6PLT-W1-P WAFER-HY2.0-6PWT-W1-P WAFER-MX1.25-5PLT-W1-P