623 Receptacle

speedtec - ready

12-pin
insulation insert Code 0°
housing code 1
flange mount /Flange 25x25
Anti-vibration o-ring

Technical Data

number of pins	12
temperature range	-20 °C to 130 °C
protection type	when connected IP 66/67

Electrical Data

	signal
rated current	max. 7 A*
rated voltage	160 V (AC/DC)
rated insulation voltage (L-L)	2500 V
mating cycles	500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2

pollution degree	3
over voltage category	III
max. height for operation	2000 m

Material

housing	zinc diecast / nickel plated
insulation insert	PBT, UL 94 / V0
seals	FKM

Contacts (not part of product contents)


Tools (not part of product contents)

A EG A 110 NN 00 00 0201 000
A E A 110 N 00 00 0201 000



Contact Arrangement
mating view



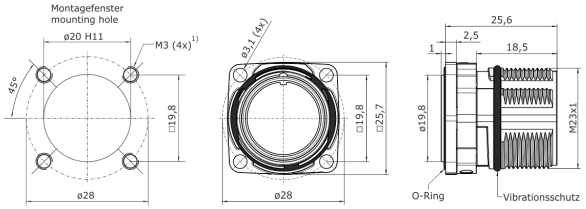

1) Bei Bohrung M3 Sonderschraube mit dünnem Kopfdurchmesser verwenden, siehe Zubehör! Alternativ auch Gewinde M2,5 möglich

1) for M3 bore use special screw with thin head diameter, see accessoires! possible also with tread M2.5

Main Dimensions
Receptacle

*for max. wire cross-section pay attention to the cross-section of used contacts

© 2018 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Deutschland
Tel.: +49 9962 2002-0
Fax: +49 9962 2002-70
E-Mail: intercontec@te.com
Web: www.intercontec.biz

issue: 23.07.2018

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

ROX9J820R SMA-A0102FTDL10K 173796-E 322335 539635-1 1622820-6 1801174-1 2132781-3 2149966-1 828801-6 ROX9J160R SC30R33KT 1-917659-5 2008571-3 320552 MPT100C8K2F SMF3100KJT 967116-2 336330-1 363549-000 ROX9J100R ROX9J4K3 T4112401051-000 ROX9J2K4 1-350945-0 7-2178711-4 ROX9J120R 5174225-5 1-316080-2 641763-1