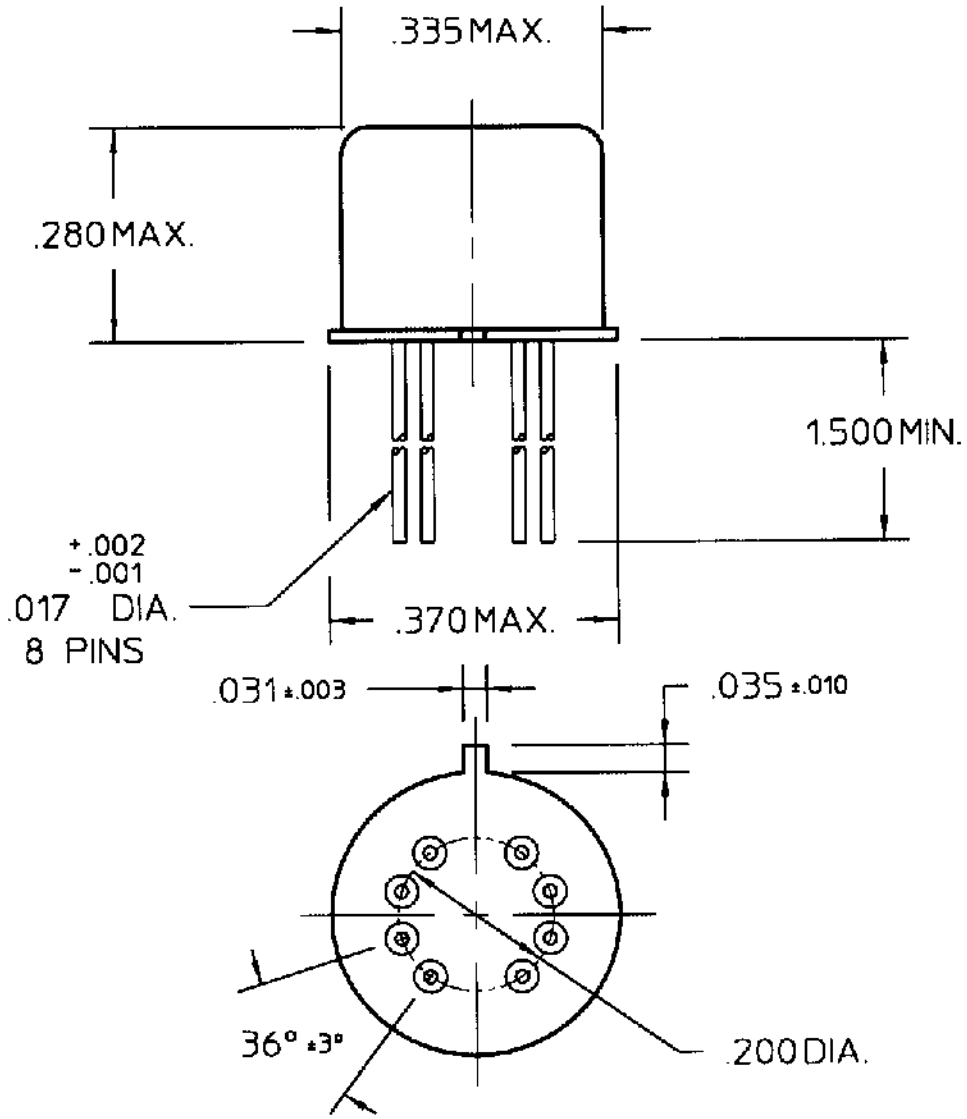


COIL: @ 25°C

RESISTANCE	1560 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	15.2 VDC
MUST RELEASE	9.5 VDC MAX, 1.8 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2 MS MAX
RELEASE TIME 4 MS MAX
CONTACT STABILIZATION 2.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 6/10/97 CK 6/10/97

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/20-012M

TYPE "JMADD" RELAY

JMAWDD-26XM

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

SBCHE154R7K 175977-2 2377783-2 2380312-2 ROX05SJ18R SMW73R0JT 1-794222-0 1969656-1 MPT100C18RF RH73H2A40MKTN TE50BR39J 1-962915-1 141991-2 1393431-1 2834055-1 650075-000 917696-1 936348-1 CPF0402B37K4E1 SBCHE64R7K 1903112-2 2005330-1 3631B101LL CRGCQ2010J3K3 U5254-000005-030PA 1743455-2 2-292161-3 2310537-1 3-1393225-0 3430B2F51RTDF