


REV.	DATE	DESCRIPTION
A	03/18/05	UPDATE DRAWING FORMAT

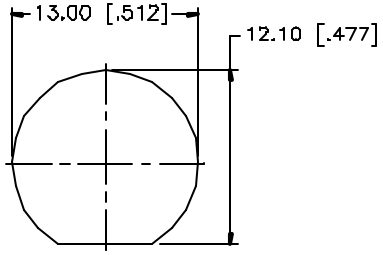



RECOMMENDED
MOUNTING HOLE

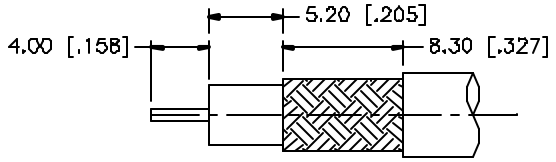

RECOMMENDED
CABLE STRIPPING DIM'S

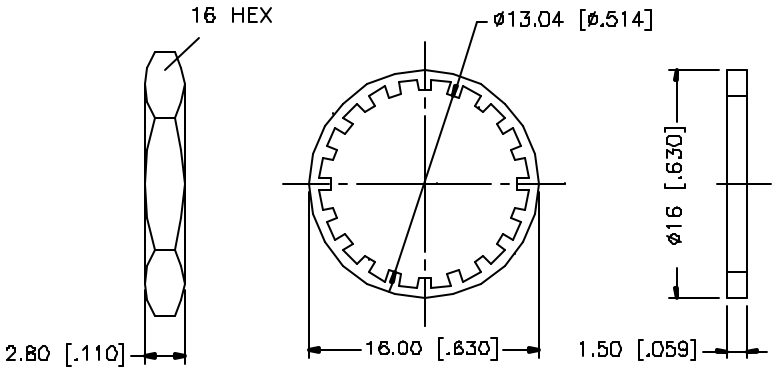

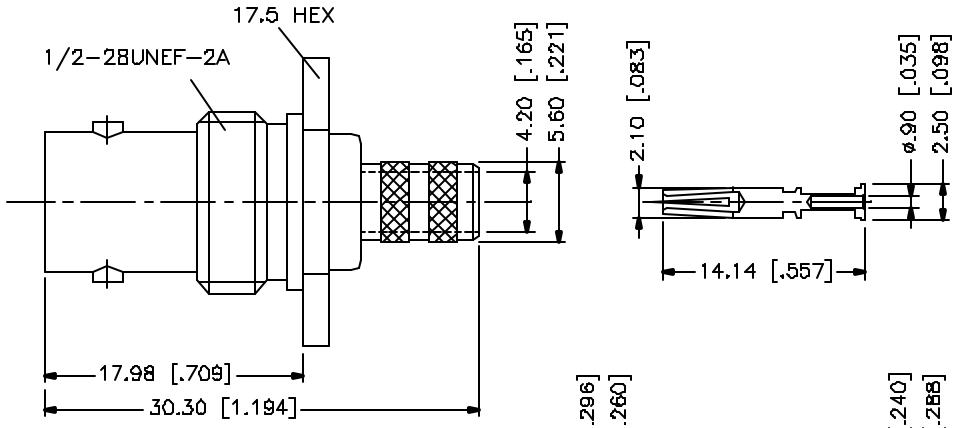

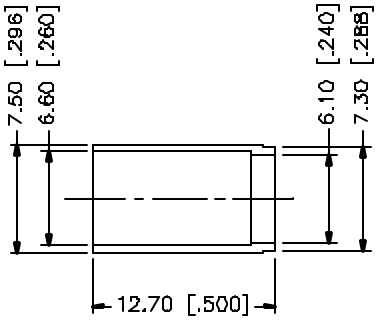

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN. OVER COPPER PL. 50 MIN.
2. GOLD PL. 30 MIN. OVER NICKEL PL. 50 MIN.
3. TEFLON MIL-P-19468.

B				
7	FERRULE	COPPER	NICKEL	1
6	HEX NUT	BRASS	NICKEL	1
5	LOCK WASHER	BRASS	NICKEL	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 6mm ± 0.20mm
6 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/18/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/112/112970.DWG

Amphenol Connex

PART DESCRIPTION
BNC BULKHEAD CRIMP JACK
(FOR AT&T 734A CABLE - 75ohm)

PART NO. 112970

DWG. NO.	REV.	SIZE	SCALE
112970.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

86093968813H45V1LF 86130202123355E1LF DEM09P032N 67996-204HLF DAPO15S365TLF 70218-1116LF 91614-403ALF 95157-140LF RJSBE5080C2 65781-158 69192-408HLF 76384-316LF CD15S13E4RV09LF 70430-164LF LD15P33E4GV00LF 86093488314745V1LF 68000-236HLF 68001-200HLF 863013A DCMF37P 54202-G0805CLF D15P13A6RV12LF LD25S33E4GV00LF 68001-108HLF 70234-112LF 86093968191755E3LF RJE061661210 54202-S08-07LF 68002116HLF 86093967896755LF