



RoHS

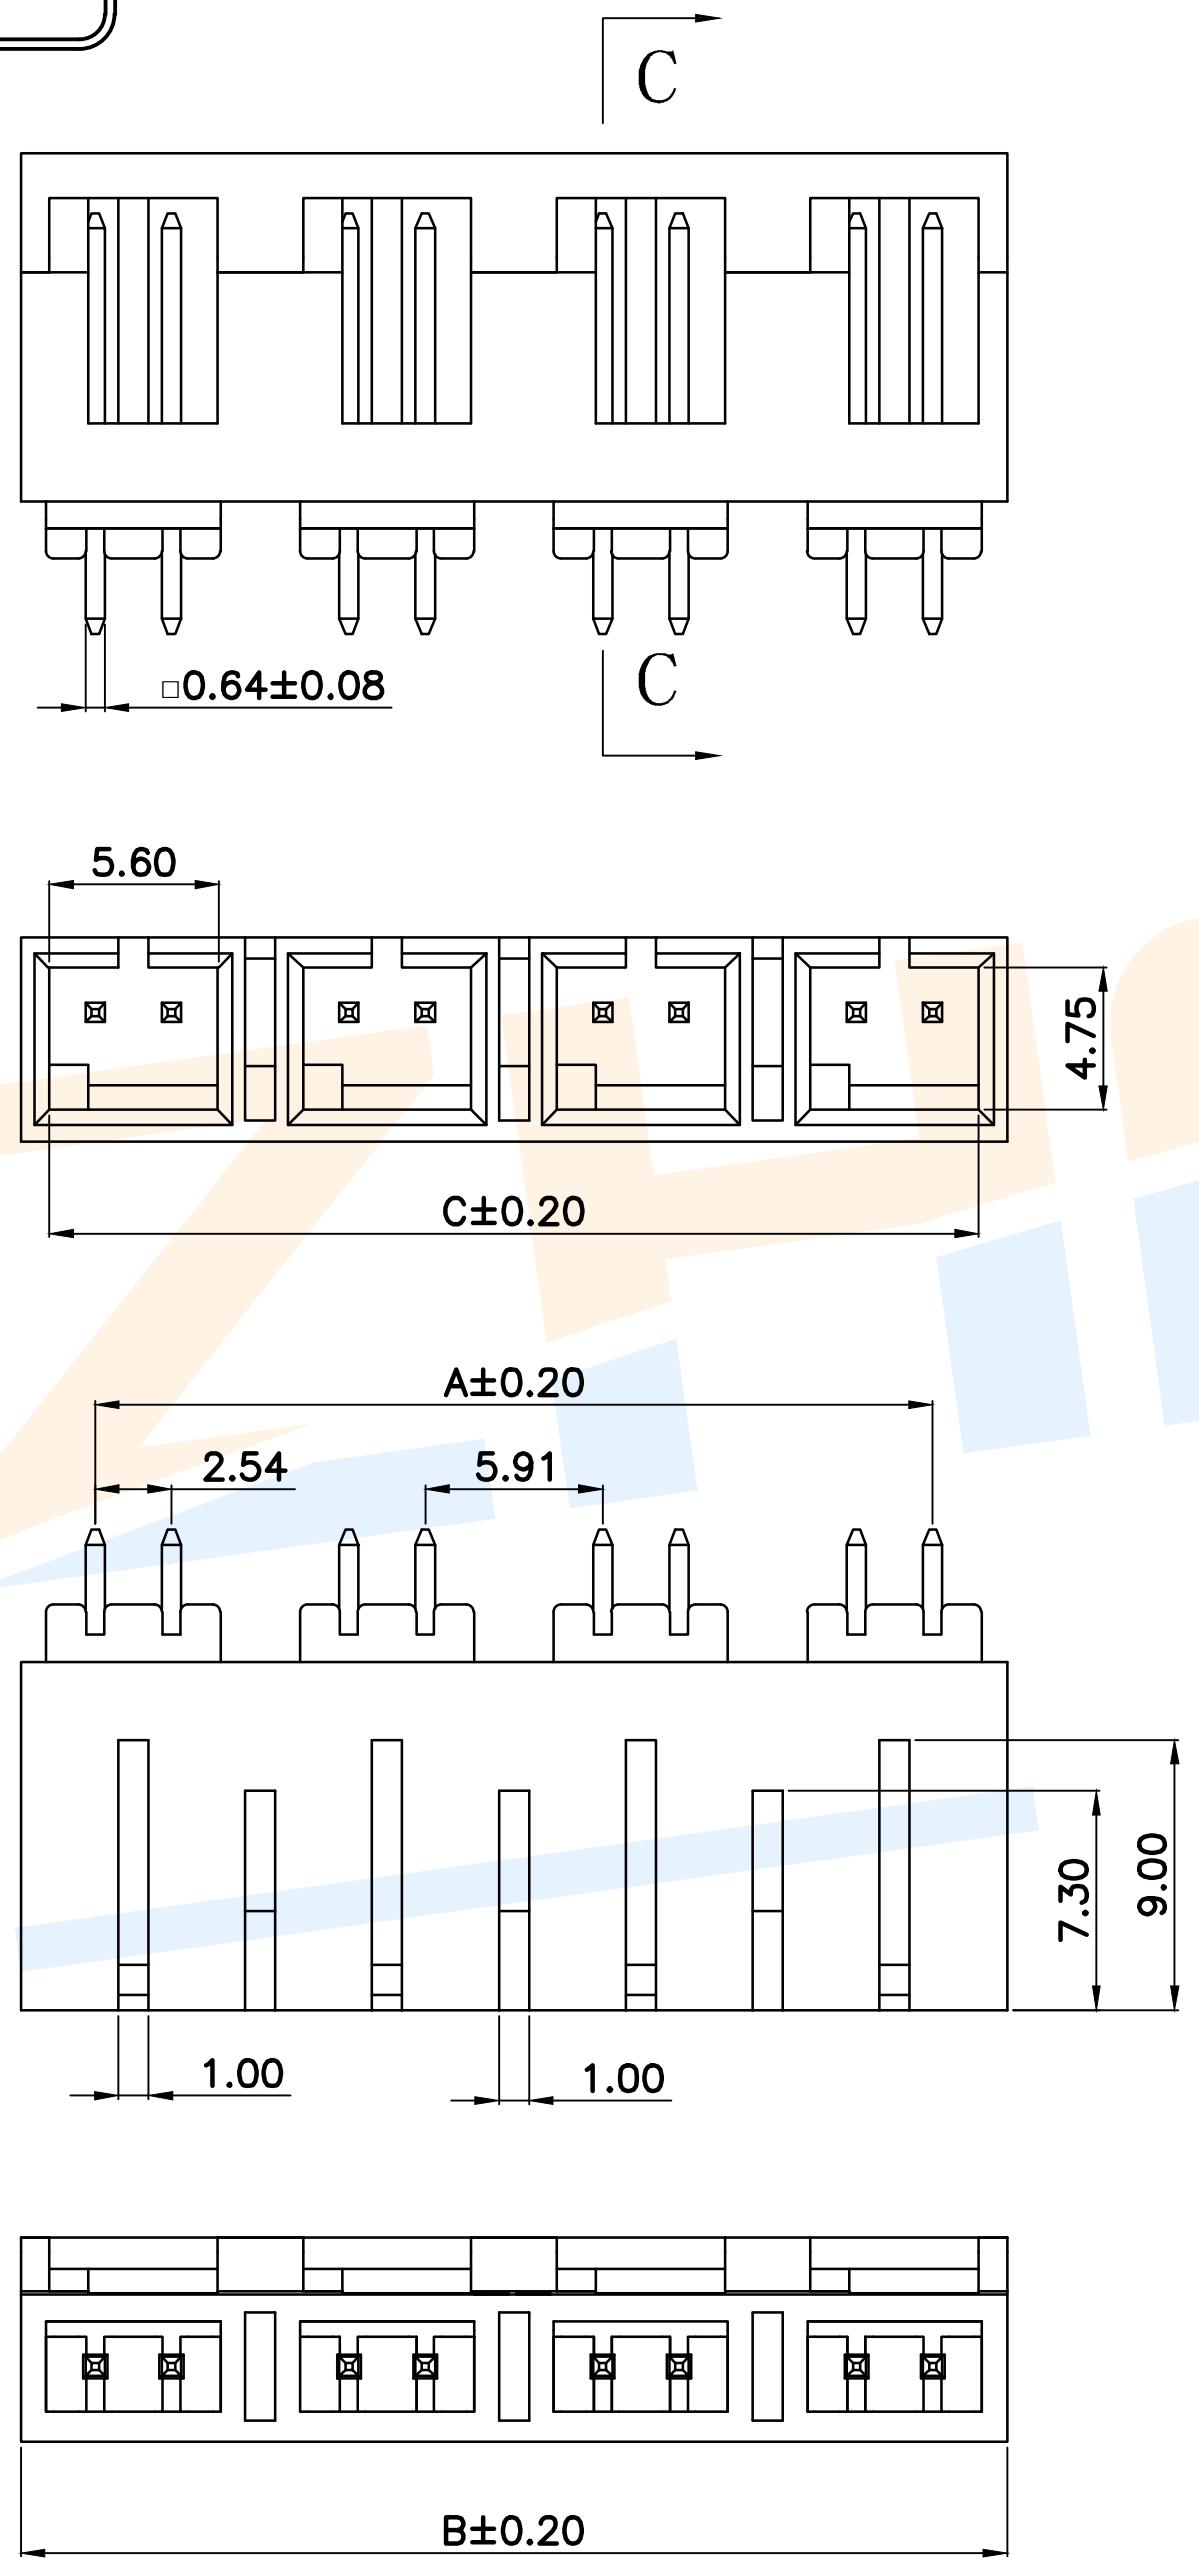

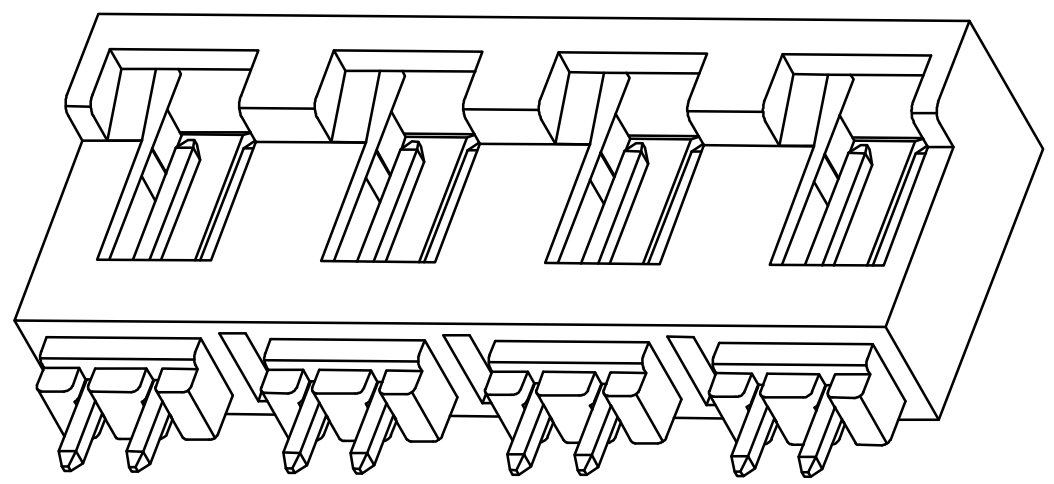

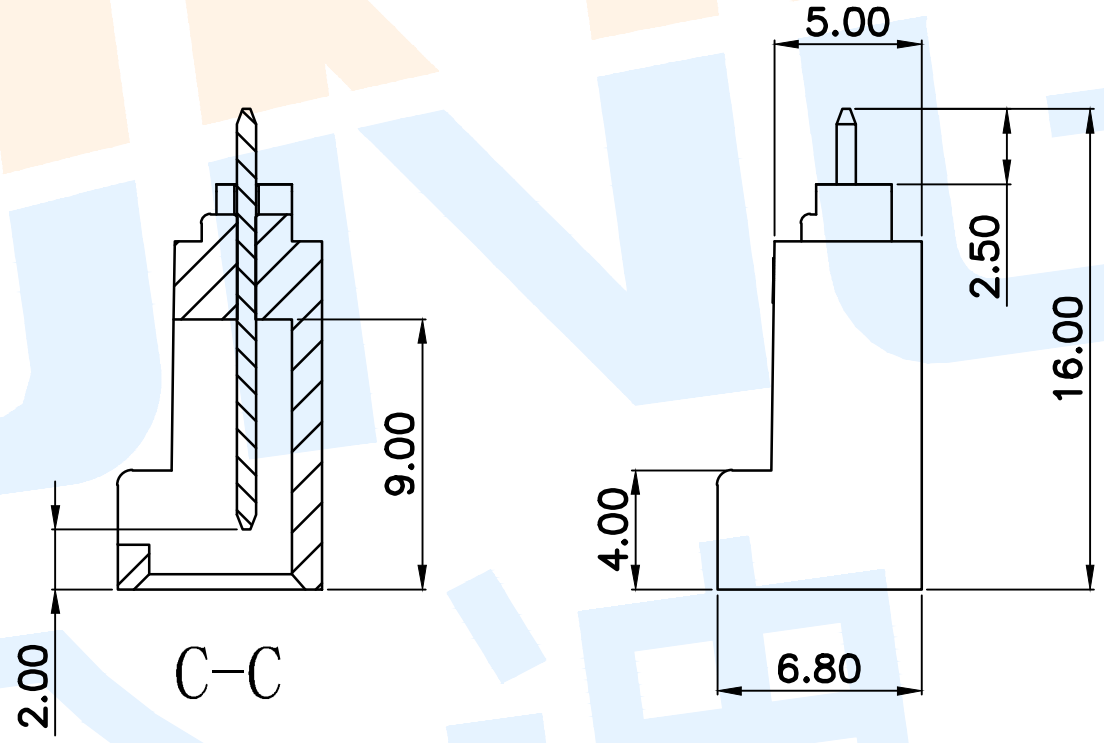

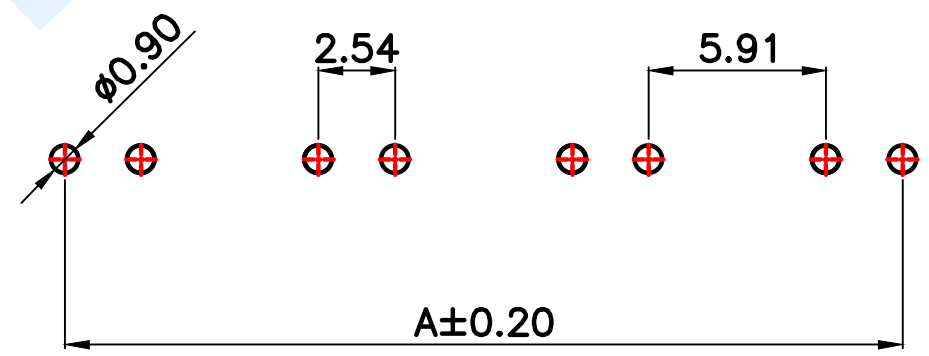

适用线路板(PCB LAYOUT)

Model No.	Pin	A	B	C
WAFER-TJC8-2.54-2PZZ	2	2.54	7.50	5.60
WAFER-TJC8-2.54-4PZZ	4	10.99	15.95	14.05
WAFER-TJC8-2.54-6PZZ	6	19.44	24.40	22.50
WAFER-TJC8-2.54-8PZZ	8	27.89	32.85	30.95
WAFER-TJC8-2.54-10PZZ	10	36.34	41.30	39.40
WAFER-TJC8-2.54-12PZZ	12	44.79	49.75	47.85

Specifications/技术规格:

1.Poles/线数：2P、4P、6P、8P、10P、12P
2.Wire range/适用线规：AGW 26#～22#
3.Applicable PC board thickness/适用PC板厚度：1.6mm
4.Current rating/额定电流：3.0A
5.Voltage rating/额定电压：250V DC/AC
6.Insulation Resistance/绝缘电阻：1000MΩ Min
7.Dielectric Withstanding/ 耐电压：1500V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	PA66	Black

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

Tolerance not specified	
angle	±2°
10~30	±0.30
5~10	±0.20
~ 5	±0.10

modify | Review | Approved

design | date
Review | date
Approved | date

Drawing number:

Proportion 1:1 | unit mm | gape number | A4

name: WAFER CONNECTOR

model: WAFER-TJC8-2.54-□□PZZ

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-MX1.25-5PZZ-C22-9T WAFER-SH1.0-11PLT-W1-P WAFER-SH1.0-6PWT-W1-P
WAFER-TJC8-2.54-2PWZ WAFER-GH1.25-12PLT-W1-P WAFER-HY2.0-7PWT-W1-P
WAFER-MX1.25-5PLT-W1-P WAFER-VH3.96-5PWT-W1-P WAFER-XH2.54-12PWT-W1-P
WAFER-ZH1.5-12PWT-W1-P WAFER-ZH1.5-2PWT-W1-P WAFER-GH1.25-14PWT-W1-P
WAFER-HY2.0-4PWT-W1-P WAFER-MX1.25-2PWZ-C22-9T WAFER-SH1.0-8PWT-W1-P
WAFER-SUR0.8-12PWT-W1-P WAFER-XHB2.54-7PWT-W1-P WAFER-HY2.0-10PWT-W1-P
WAFER-HY2.0-6PLT-W1-P WAFER-SHB1.0-8PWT-W1-P WAFER-SUR0.8-14PWT-W1-P
WAFER-TJC8-2.54-12PZZ WAFER-MX1.25-4PWZ-C22-9T WAFER-PH2.0-2PWT-W1-P
WAFER-SHB1.0-13PLT-W1-P WAFER-ZH1.5-4PLT-W1-P WAFER-ZH1.5-2PLT-W1-P
WAFER-HY2.0-6PWT-W1-P WAFER-SUR0.8-4PLT-W1-P WAFER-VH3.96-3PWT-W1-P