




CAD FILE:

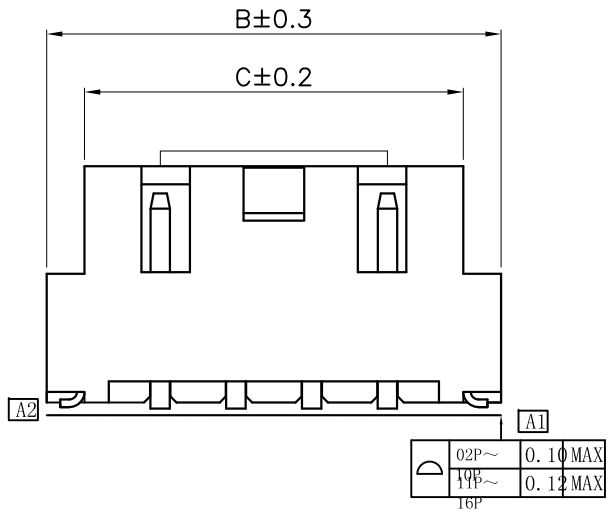


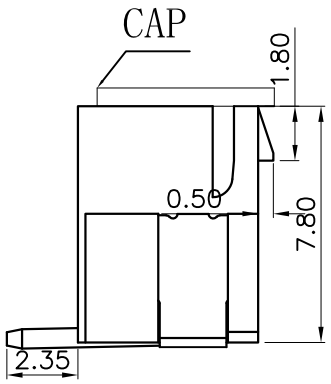

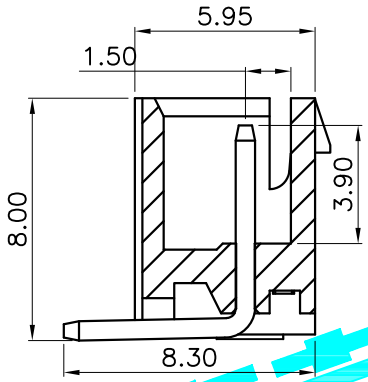

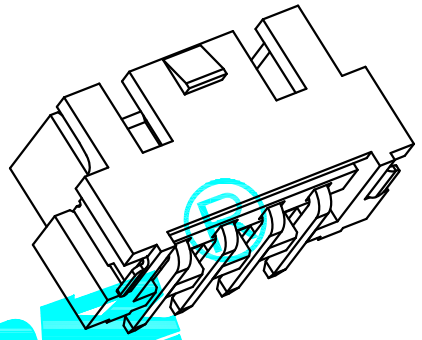

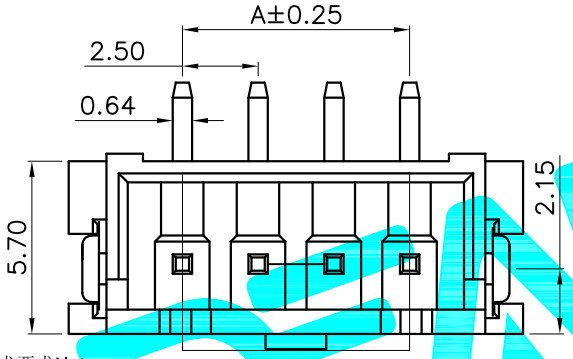

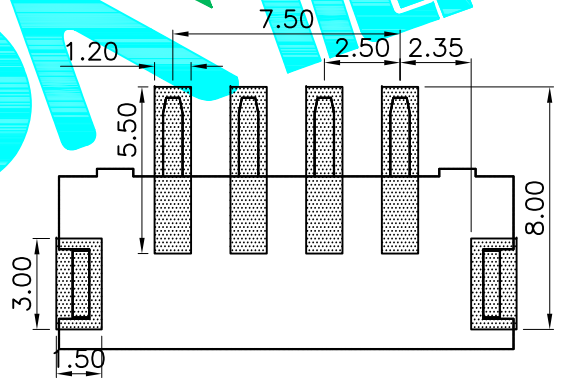

P. C. B LAYOUT

Pin	A	B	C
2	2.50	10.00	8.30
3	5.00	12.50	10.80
4	7.50	15.00	13.30
5	10.00	17.50	15.80
6	12.50	20.00	18.30
7	15.00	22.50	20.80
8	17.50	25.00	23.30
9	20.00	27.50	25.80
10	22.50	30.00	28.30
11	25.00	32.50	30.80
12	27.50	35.00	33.30
13	30.00	37.50	35.80
14	32.50	40.00	38.30
15	35.00	42.50	40.80
16	37.50	45.00	43.30

技术要求Notes:

1.外观质量Appearance quality:
 a.金属表面镀层不能有明显损伤;
  Coating on metal surface can not be damaged obviously;
 b.塑壳表面不能有明显的变形或开裂;
  No obvious deformation or cracking can be observed on the surface of the Housing;
 c. 产品表面应保持清洁;
  Product surface should be kept clean;
2.工作温度 Working temperature：-25℃～+105℃;
3.额定电压 Voltage Rating ： Max 250V [AC(Effective value rms)/DC];
4.额定电流 Current Rating：Max 2A [AC(Effective value rms)/DC];
5.接触电阻 Contact resistance： Max 20 mΩ
6.绝缘电阻 Insulation resistance：Min 1000MΩ;
7.耐压 Withstanding voltage：1000V AC(50 Hz，Effective value；1 min);
8.环保要求应符合RoHS标准
 Environmental requirements should meet RoHS standards.

APPROVALS		DATE	DEALON 德之隆® ELECTRONICS CO.,LTD
DRAWN	G.M.Chen	2015/7/17	
CHECKED			TITLE: CONNECTOR
APPROVALS			PART NO. L254XHB-XXPS

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	SHEET 1 OF 1
	30~以上	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.		PROJ:
	~ 5	±0.10				

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

DEALON:

1.25-5PS DW254W-11-06-85 DZ127S-22-06-55 1.0-4PWB 1.25-4PS DW254S-22-04-85 DZ254R-11-04-63 DZ254S-11-03-48 XH-4A USB-TYPE-C-019 XH-4PWB DZ254R-11-09-63 DZ254S-11-02-48 USB-TYPE-C-009 XH-2PWB 1.25-3PS 1.25-3PWB 1.25-4PWB DW254S-22-06-85 DZ127R-11-06-25 XHB-2A 1.25-5PWB 1.25-8PWB DM254R-11-04-85 DW127R-22-12-23 MK-12C01-G1.5 PH-2PWB XH-4PS DZ254S-22-04-75 USB-TYPE-C-018