
TRIAD MAGNETICS

POWER TRANSFORMER
PC Mount: Single Primary

F-135P

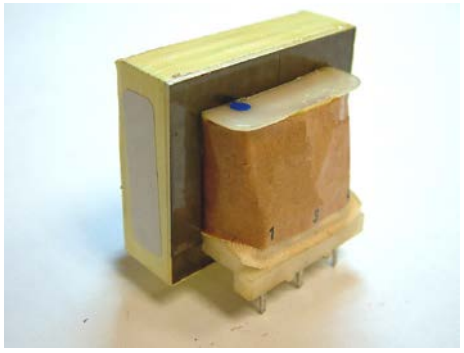


Electrical Specifications (@25C)
1. Maximum Power: 1.5 VA
2. Primary: 115V 50/60 Hz
3. Secondary: Series: 76.0V CT @ 0.020 Amps
   Parallel: 38.0V CT @ 0.040 Amps

Description:
The F-135P is part of a wide selection of plug-in types that meet the needs of PC boards and solid state power supply design. This transformer can satisfy power as well as control and instrumentation applications.

Construction:
Wound on a single channel nylon bobbin. Materials are UL recognized, Class B (130º C) rated.


Safety:
These products are 100% hipot tested with an insulation of 1500V between primary and secondary windings.

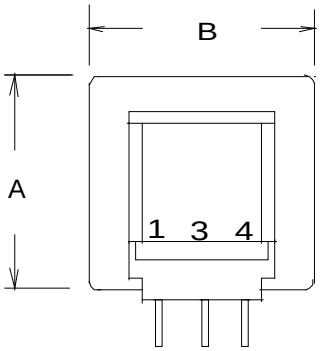


Dimensions:
Units: In inches


A	B	C	D	E
1.187	1.390	1.562	0.312	1.00

Pin length: 0.187 in.
Pin size: 0.20 x .041 in.
Weight: 3.5 oz

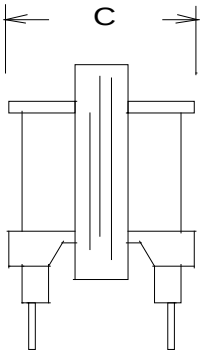

Schematic:





Primary: 1 to 2
Secondary: Series - 3 to 6, Jumper 4 to 5
Parallel - 3 to 6, Jumper 3 to 5 and 4 to 6

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

*Upon printing, this document is considered “uncontrolled”. Please contact Triad Magnetics website for the most current version. For soldering and washing information please see http://www.triadmagnetics.com/faq.html

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: June 7, 2016

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Triad Magnetics:

CMT-8107 FD4-24 VPS10-2500 F-3116X N-68X WSU120-1000 AWSP60-12 CMT-8120 FS12-1000 N-54MG SP-32 C-36X F-13X F20-055 AX97-30100 CST206-1T FIT106-2 FIT106-6 CSE186L FP24-500 WSU180-0450-R C-17X FD8-16 FS28-040-C2 TY-311P WSU240-0500 FIT44-3 FP34-75 TCT50-05E07AB VPS20-4000