
Switchmode/High Frequency Common Mode Inductors

ET3542-055

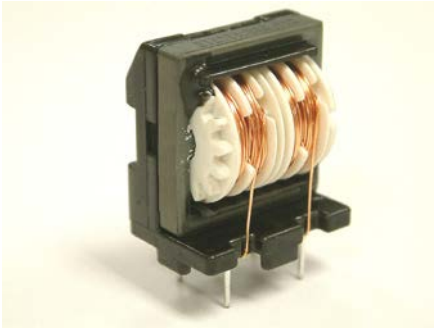


Description:
Common-mode coils are useful in a wide range of applications for the prevention of electromagnetic interference (EMI) and radio frequency interference (RFI) from power supply lines and for prevention of malfunctioning of various electronic equipments. Features include low leakage flux, high self-resonant frequency, high impedance at applicable frequency and low stray capacitance in section winding. Designed to meet UL, CSA and IEC standards.

Electrical Specifications (@20°C):


Min. Inductance* (mH)	Inductance Difference (µH) Max	Max. DC (Ω) Resistance	Amps RMS
10.00	300	0.15	2.70

*inductance per winding.

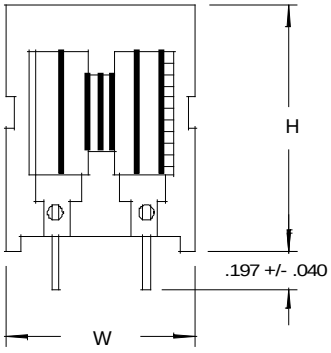

Specifications:

Rated Voltage = 250VAC
Temperature Rise = 45°C Max
Insulation Resistance = 100M Ω Min
Operating Temperature Range = -20 to 105°C
Dielectric Withstanding Voltage = 2,000 VAC

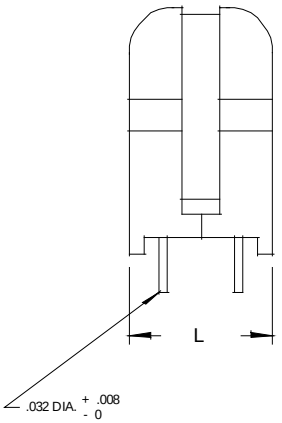


Dimensions:

W	L	H	A	B
1.496	1.024	1.772	.827	.591


Units in inches.

Weight: 2.60 oz.



PIN MOUNTING

Schematic:



RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

*Upon printing, this document is considered “uncontrolled”. Please contact Triad Magnetics website for the most current version. For soldering and washing information please see http://www.triadmagnetics.com/faq.html

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: June 7, 2016

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Triad Magnetics:

CSE186L FD4-24 AWSP60-12 AX97-30100 F-13X F20-055 FIT106-2 C-36X CMT-8120 WSU240-0500 CST206-1T FIT106-6 FP34-75 SP-32 TY-311P VPS20-4000 N-54MG TCT50-05E07AB WSU120-1000 C-17X WSU180-0450-R CMT-8107 FD8-16 FIT44-3 FS12-1000 F-3116X FP24-500 FS28-040-C2 N-68X VPS10-2500