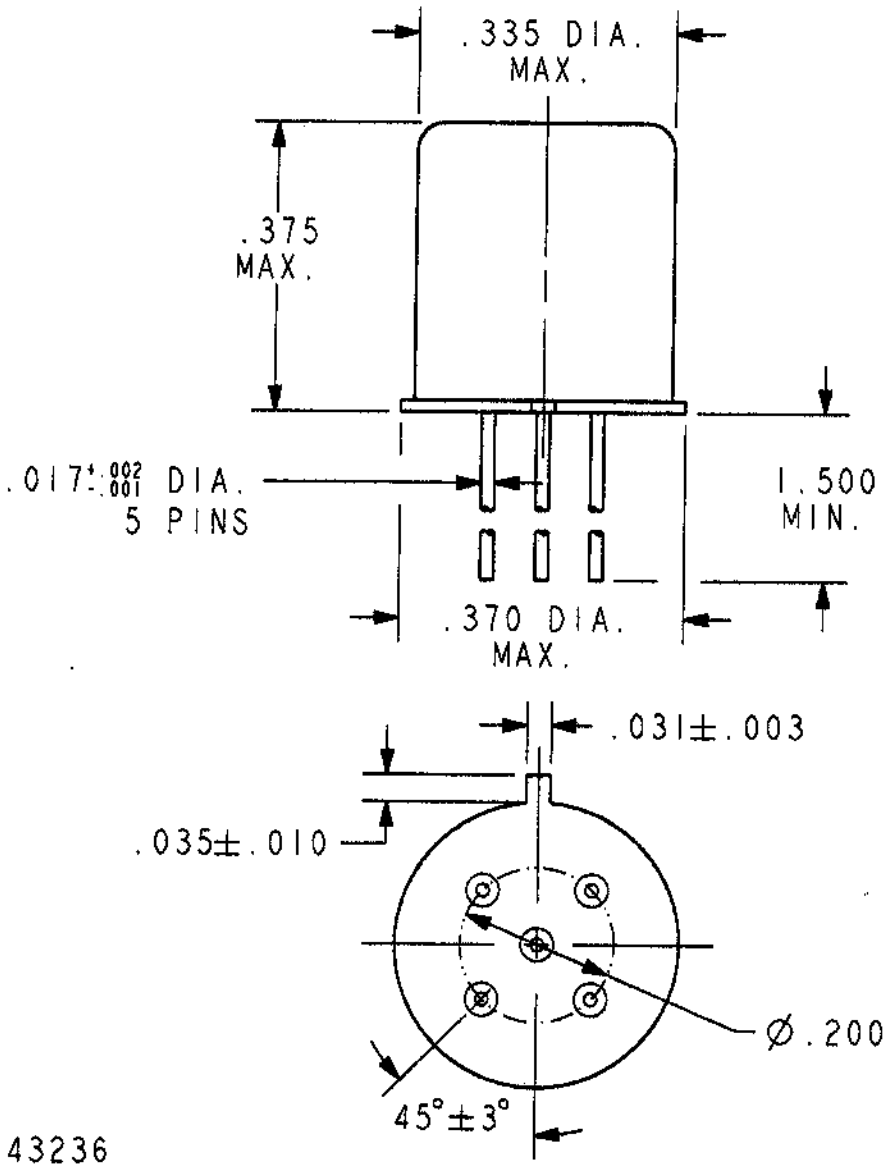


REV. 0

DCO 143236

COIL: @ 25°C

RESISTANCE 125 OHMS ±10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.8 VDC

MUST RELEASE 1.7 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 7.5 MS MAX.
CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 9/27/01 CK. 9/27/01

CII Technologies
advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/25-017M REV.

"JIMSD" RELAY

JIMSWD-5XM

F-718 REV. 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-794222-0 1-962915-1 U5254-000005-030PA 1903112-2 2377783-2 3631B101LL MPT100C18RF RH73H2A40MKTN SMW73R0JT ROX05SJ18R 141991-2 1969656-1 917696-1 SBCHE154R7K 2-292161-3 3430B2F51RTDF SBCHE64R7K TE50BR39J 1393431-1 2834055-1 1743455-2 175977-2 2005330-1 2310537-1 650075-000 CRGCQ2010J3K3 2380312-2 3-1393225-0 936348-1 CPF0402B37K4E1