


Downloaded from Arrow.com.


SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

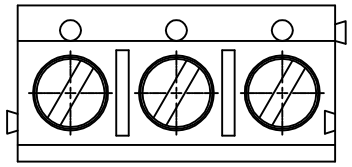

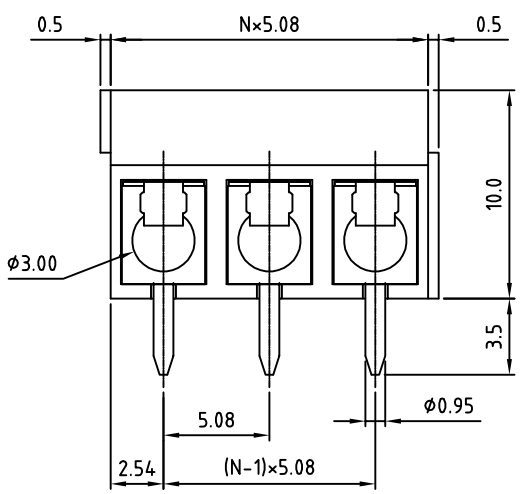

N=NUMBER OF POLES

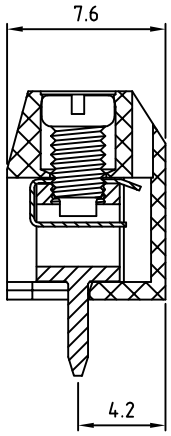

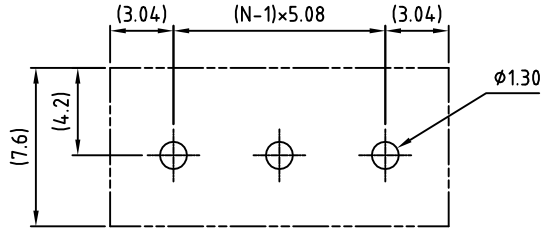

RECOMMENDED PCB LAYOUT

Material

- Terminal body (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 15A
- Wire range:
  Solid wire(AWG): 14-22
  Stranded wire(AWG): 14-22
- Torque: 2.6Lb-In
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: c UL us

RoHS Compliant

PART NUMBER:

OSTTCXX2162

No. of Poles
02: 02 Poles
03: 03 Poles
...
24 24 Poles

COLOR
0: Black
5: Green
6: Blue (Standard)
8: Grey

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

ON-SHORE TECHNOLOGY, INC.

TITLE	OSTTC-5.08 Series 2-Interlock				
PART NO.	OSTTCXX2162			DWG NO.	OSTTCXX2162.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
	Marvin 2006.06.23	Marvin 2006.06.23	Marvin 2006.06.23	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: D	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°