

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/11/18	
A		ADDED SPEC.	3/2/20	OW/RC

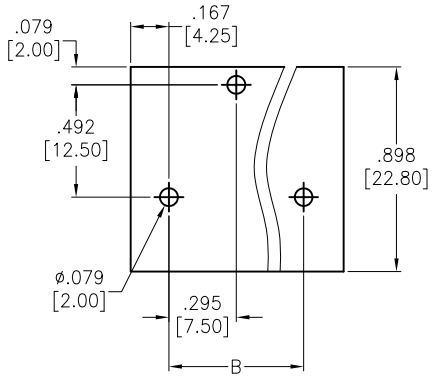




RECOMMENDED PCB LAYOUT

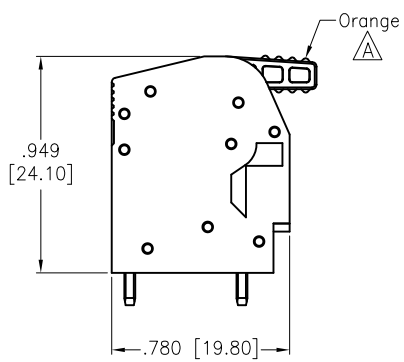

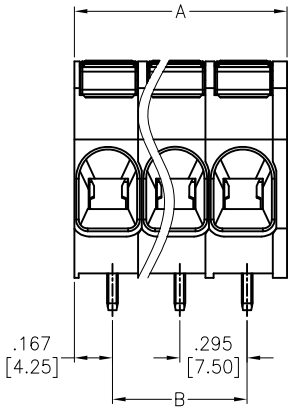

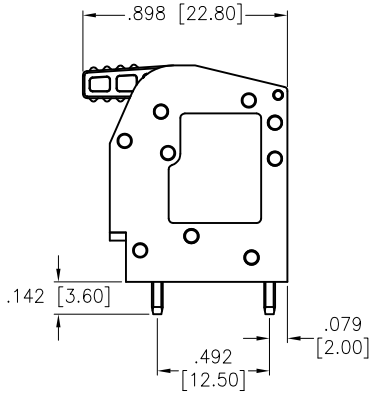

SPECIFICATIONS:

Material:
Insulator: PA, rated UL 94V-0
Insulator color: Green
Pin Header: Copper Alloy, Tin plated

Electrical:
Voltage rating: 600 V
Current rating: 27 A
Dielectric withstanding voltage: 2,200 V for 1 minute

Mechanical:
Wire range: 24~10AWG
Wire strip length: 15-16mm

Temperature Rating:
-40°C to +105°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 16
A= .295 [7.50] x No. of Positions + .047 [1.20]
B= .295 [7.50] x No. of Space

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	10/11/18
CHECKED	DH	10/11/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.295 [7.50] PITCH SPRING CLAMP
TERMINAL BLOCKS, RIGHT ANGLE

SIZE	PART NO.	REV.
X	EB171A-XX-M	A

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ADAM TECH:

DMF-02-S ICS640T SMC-2-08-1-GT SW-PB7-07LB42CRRG12V 1CH-A-10 CDH-11 DA15-PT-2
MMI-P1PG10SGG52 PLCC-52-AT DB25-PT-1BLJS EBSA-02-A PH1RB-02-UA SPH2-16-U-SMT
ESMC-F-80-SGS-SMT-B-PP-T/R ICM-316-1-GT-HT RF1-07-T-00-75 25CH-B-07 BHR-20-VUA
EBJA-04-C-BK MDJ-009-FS PH1-20-U-A PH1RA-03-UA BHR-10-VUA RF55-29L-T-00-50-G-SH
2PH1-16-UA-SMT-B EB163A-05-C-180 MTJ-88AX1-FSN-LH-M4S SD-PNN10-MMLAL-S00-000
SW-PB7-1Z-A-RG-H-3-G2A SW-PB8-AA00B2GE-2