

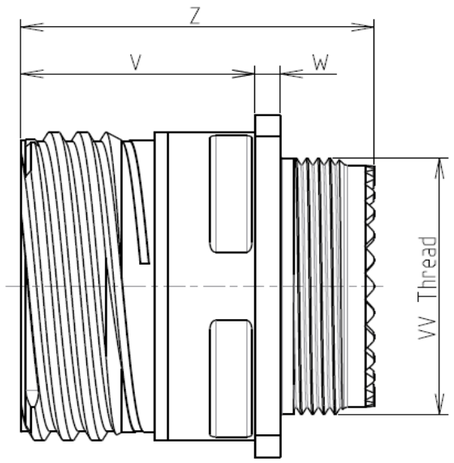


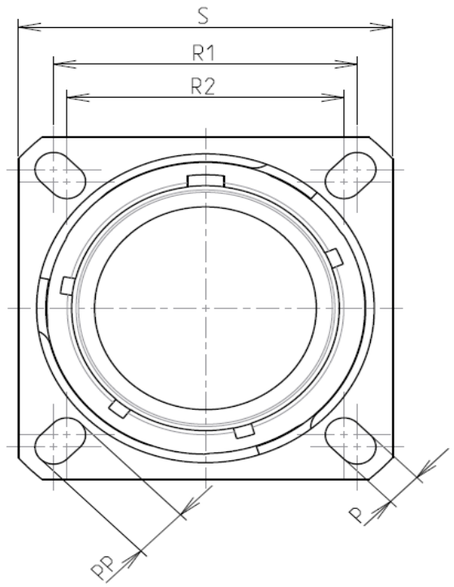

Keying Shown as example

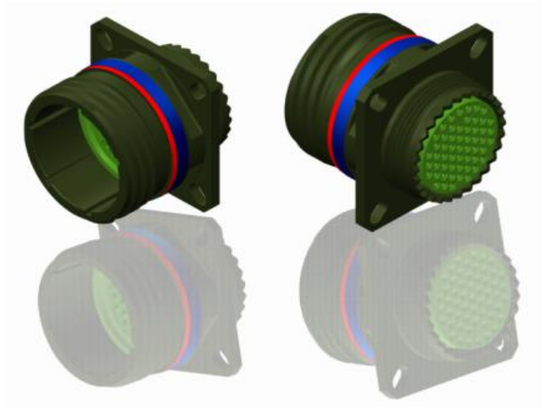

LAYOUT SHOWN AS EXAMPLE

CHARACTERISTICS

-Standard : Based on MIL-DTL-38999 Series III
-Shell Material : Aluminium
-Shell Plating : Olive drab Cadmium
-Insulator : Thermoplastic
-Contacts : Copper Alloy
-Seals & Grommet : Silicon Elastomer
-Contact Plating : Gold over copper Alloy 0.8µm minimum
-Durability : 500 Mating cycles
-Delivered with Souriau contacts and Accessories

-Temperature Range : -65°C to +175°C
-Salt Spray : 500 hours
-Mass : 9.15 g ± 10%

Connector dimension	
Dim	**Nominal**
P	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M12x1-6g

BASIC SERIES:	8D	0	-	09	W	98	P	E

SHELL TYPE : Square Flange Receptacle
CONTACT TYPE : Standard Crimp Contact
SHELL SIZE : 09
PLATING : W = Olive drab Cadmium
ORIENTATION : E
CONTACT TYPE : PIN(500 Matings)
CONTACT LAYOUT : 09-98

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D009W98PE

ISS	DATE	Latest modification - by	MOD N°
A	03-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Receptacle 8D series


SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D009W98PE-C | SHEET 1/2


Contact Layout




Contacts (Insert arrangement 9-98)		
Contact position ID	Contact location	
	X-axis (mm)	Y-axis (mm)
A	+.065 (1.65)	+.038 (0.97)
B	+.000 (0.00)	-.075 (1.91)
C	-.065 (1.65)	+.038 (0.97)

Shell size	Arrangement no.	Number of contacts	Size contacts	Service rating	Contact location	Supersedes
9	-98	3	20	I	All	MS20049-98

Panel Cutout

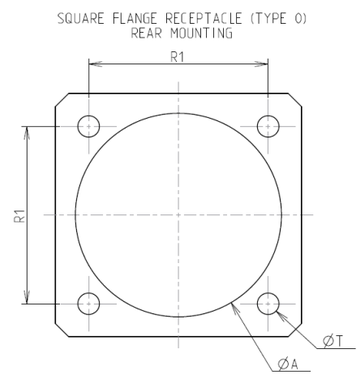

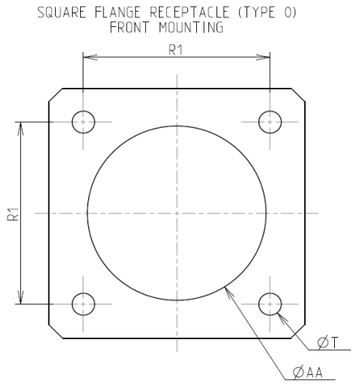

Dim	Nominal
ØA	16.66 min
ØAA	13.11 min
R1	18.26
ØT	3.25 ±0.13

SOURIAU shall not be liable for any non-conformity or damage
due to a use of the Products which does not comply with
the Specifications issued by either of the Parties or by a third party
(professional recommendation, technical notice.)

Country	Jurisdiction & Control List
FR	Not Listed

PN: 8D009W98PE

ISS	DATE	Latest modification - by	MOD N°
A	03-10-2016	First Release	

Designed By: Date: **CUSTOMER DRAWING**

TITLE Aluminium Receptacle 8D series

SCALE NA | General linear Tolerances: ±-- | NPRDS / PROJECT **859**

SOURIAU WWW.SOURIAU.COM

This document is the property of SOURIAU
it must not be reproduced or communicated without permission

FORMAT A3 | SOURIAU DRG N° 8D009W98PE-C | SHEET 2/2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Souriau-Sunbank:

8D525M24PN 8MQ2M0412PB UT0S16JCS UTS6JC1823P 8MQ2M0412ABE 8MQ2M0412RCE 8MQ2M1220AD UT010LPGN UT061619SH UTG11412PH UTS6JC1823S UTP14DCG UTS08E3P 8MQ2M0816BCE D38999/26JJ24PN SC20WL-3S25 SC24WL-3S25 UTS10DCGE UTSX0128P RM28M1K SC24ML-1D70 UTL6122G1W5P 8MQ2M01L28ADE SM16ML-1S6 UT001412SH UTG22PG UTGX1JC103P UTGX71419P BIS10PLN0416M D38999/26MJ24PN-LC