



MAPX	MODIFICATION	DATE

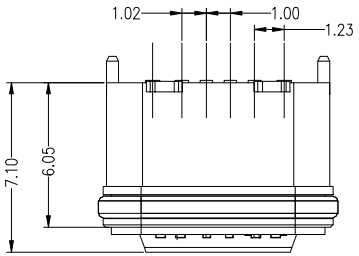





防水圈

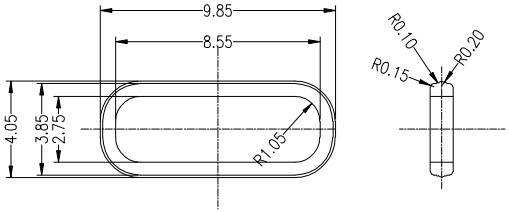










Cap dimensions

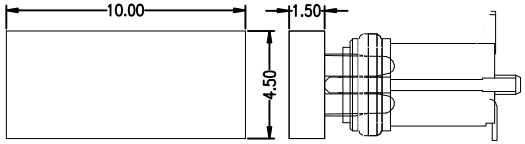



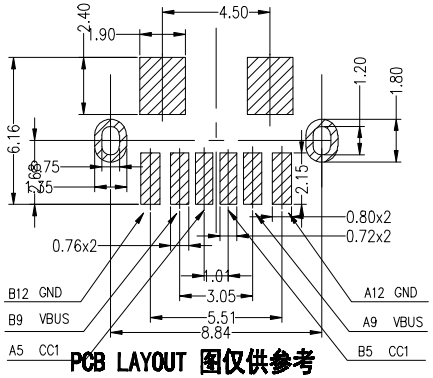

PCB LAYOUT 图仅供参考

Note:
1.Material:
1.1 Housing: lcp
1.2 Contact:C5191,t=0.20mm
1.3 Shell: Zinc Alloy
2.ELECTRICAL:
2-1:CURUENT RATAING:
VBUS AND GND CONTACTS RATED AT 1.5A
PARALLELED FOR A TOTAL OF 3A;
2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS
2-3:DIEELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;
3:MECHANICAL CHARACTERISTICS:
3-1:MATING FORCE:5~20N
3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)
3-3:FREQUENCE: 200±50 CYCLES /HOUR,10000 CYCLES
3-4:OPERATING TEMPERATURE ;-40°~80°.
4: WATERPROOF: IP-X7.

产品图 PRODUCT CHART DWG			深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE			单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	910-41B2020140000
X.	±0.30	±5.°	比例 SCALE	1:1	审核 CHED	郭志富	产品名称 PRODUCT NO.	TYPE-C3.1双立式防水母座SL6.05/7.1H插件四贴带定位柱沉板/GPIN
.X	±0.25	±2.°						
.XX	±0.15	±1.°	日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW	版本 VER AO
.XXX	±0.10	±0.5°						

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

919-162A1012D10400 920-C62A2021S10103 912-312A1012D10100 920-A64A2091S101A3
904-232B2032S10100 920-A62A2021S10108 907-111A1022D10200 907-312A1101Y10210
908-351A1011D10100 906-552A1012D10200 911-221A2021S10100 917-B88C201AH70201
917-P81A202ES60201 920-A62A2021S10104 910-151A2021D10100 912-112A2021S10100
918-318K2023C40005 918-418K2022Y40011 918-468K2029Y50000 920-F52A2021S10105
906-262A1021D10200 906-752B1114D10200 912-112A1011D10100 916-151A1022Y10200
918-415K3028S40000 920-154A2021Y10110 920-C52A2021S10105 904-232A2031S10100
904-331B2032S10200 905-761A2032S10200