


RoHS


REVISIONS				
SYM	ECN No.	MODIRICATION	DATE	ISSUED


Note:
1.Material:
1.1,Housing: High temperature thermoplastic with/black g.f,UL94v-0
1.2,Contact: copper alloy,t=0.25mm
1.3,Shell: copper/Ferroalloy alloy,t=0.30mm
2.Specification:
2.1,Current rating:3A Max.
2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
2.3,Contact resistance: 30 mΩ Max.
2.4,Insulation resistance: 100 MΩ Min.
2.5,Total mating force: 3.57 Kgf Max.
2.6,Total unmating force: 1.0 Kgf Min.
3.Finish:
3.1,Contact: Piated Golg in Mating Area: Tin On Solder Talls
Shell: Nickel Plating
4.Environmental:
4.1,Temperature range: -55°C~85°C

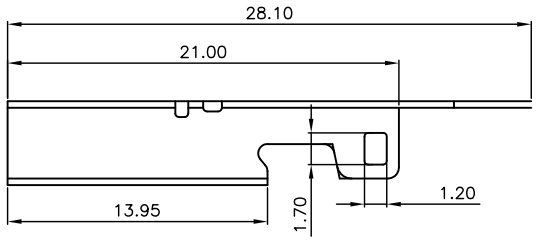





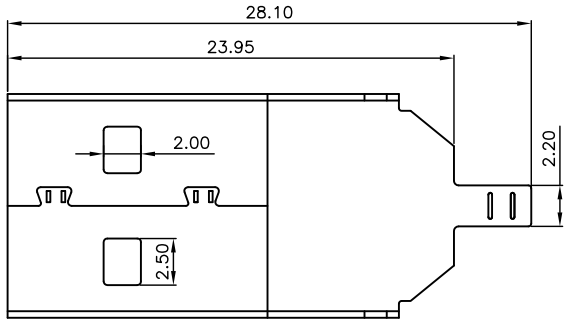


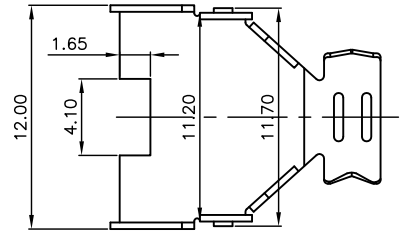



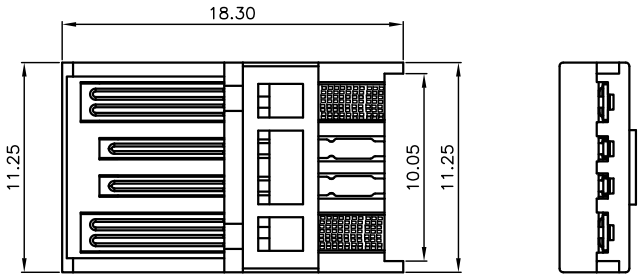

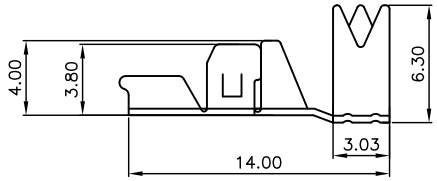

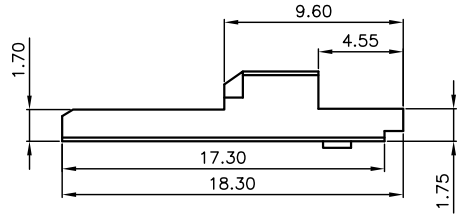

DRAWN	JTJ 深圳市精拓金电子有限公司					
CHECKED	TITLE: AM大电流三件式铁壳 PBT白色OD4.0/5A	PART NO.: 917-701A101DM0400				
APPROVED		DRAWING NO.: --				
3rd ANGLE PROJECTION	UNIT: mm	TOLERANCE: .XXX±.10, .XX±.15, .X±.25, ANG±1°	SCALE: 1:1	SHEET: 1 OF 1	SIZE: A4	REV.: X1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

920-C52A2021S10105 904-232B2032S10100 906-552A1012D10200 906-752B1114D10200
907-111A1022D10200 908-351A1011D10100 910-151A2021D10100 917-P81A202ES60201
918-318K2023C40005 918-415K3028S40000 906-262A1021D10200 912-112A1011D10100
916-151A1022Y10200 920-A62A2021S10104 920-A62A2021S10108 920-C62A2021S10103
907-312A1101Y10210 911-221A2021S10100 912-112A2021S10100 918-418K2022Y40011
920-F52A2021S10105 904-232A2031S10100 912-312A1012D10100 918-468K2029Y50000
904-331B2032S10200 917-B88C201AH70201 920-A64A2091S101A3 905-761A2032S10200
919-162A1012D10400 920-154A2021Y10110