Single Turn Trimmer

Model 25

Features:

- 1/4” square
- Sealed single turn
- Cermet
- Through-hole



Electrical

Standard Resistance Range	10 Ohms to 2 Megohms
Standard Resistance Tolerance	±10%
Input Voltage	300 Vdc Max. or rms not to exceed power rating
Power Rating	0.5 Watts at 70°C derating to 0 at 125°C
End Resistance	1% or 2 Ohms Max., whichever is greater
Actual Electrical Travel	210° nominal
Dielectric Strength	900 Vrms
Insulation Resistance	1,000 Megohms Min.
Resolution	Essentially infinite
Contact Resistance Variation	1% or 3 Ohms Max., whichever is greater

Environmental

Seal	85°C Fluorinert® (No Leaks)
Temperature Coefficient	±100 ppm/°C
Operating Temperature Range	–55°C to +125°C
Thermal Shock	Five cycles –55°C to +125°C (2% ΔRT, 2% ΔVR)
Moisture Resistance	Ten 24 hour cycles (3% ΔRT)
Shock	6 ms sawtooth, 100 G’s (1% ΔRT, 1% ΔVR)
Vibration	30 G’s, 10 to 2,000 Hz (1% ΔRT, 1% ΔVR)
High Temperature Exposure	250 hours at 125°C (2% ΔRT, 2% ΔVR)
Rotational Life	200 cycles (2 Ohms or 3% ΔRT, whichever is greater)
Load Life	1,000 hours at 70°C & 0.5 Watts (3% ΔRT, 3% ΔVR)
Resistance to Solder Heat	350°C for 3 seconds or 260°C for 10 seconds (1% ΔRT)

Mechanical

Mechanical Stops	Solid
Stop Strength	7 oz.-in. Min. (500 g-cm)
Torque	3 oz.-in. Max. (200 g-cm)
Weight	0.02 oz. nominal (0.6 grams)

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics’ own data and is considered accurate at time of going to print.


© TT electronics plc

TT Electronics | BI Technologies
4200 Bonita Place, Fullerton, CA USA 92835-1053 |Ph: +1 714-447-2300
www.ttelectronics.com | sensors@ttelectronics.com

Single Turn Trimmer

Model 25

Ordering Information

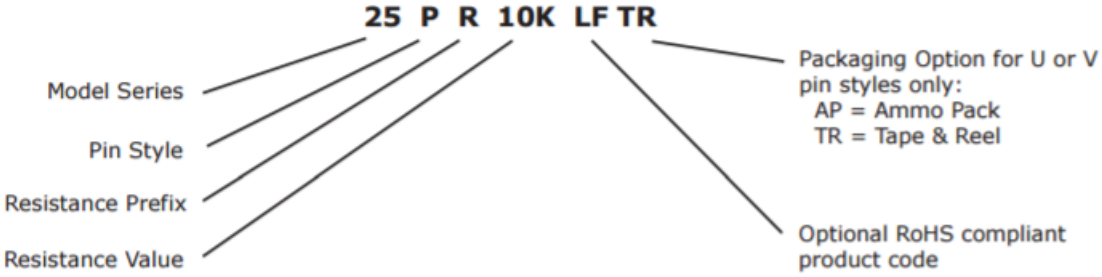

Packaging Information

Standard (no code): Tubes. 50 units each. All units oriented wth #1 pin to same side.

Option (TR code, only for U or V pin style): Tape & Reel. All units oriented with #3 pin toward direction of feed.


	Pin Style	V	U
Tape	Width =	18 mm	18 mm
	Single hole sprocket =	0.50" pitch	0.50" pitch
	Capacity =	1,000 units	750 units
Reel	Diameter =	14" (363 mm)	14" (363 mm)

Option (AP code, only for U or V pin style): Ammo pack. Tape fold 12". Box 2.0" x 13.4" x 13.8" (50 mm x 340 mm x 350 mm)

Standard Resistance Values, Ohms

10	100	1K	10K	100K	1Meg
20	200	2K	20K	200K	2Meg
50	500	5K	50K	500K	

Circuit Diagram

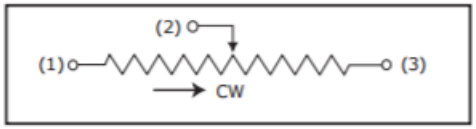


General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
4200 Bonita Place, Fullerton, CA USA 92835-1053 |Ph: +1 714-447-2300
www.ttelectronics.com | sensors@ttelectronics.com


Outline Drawings—Top Adjustment

MODEL 25P

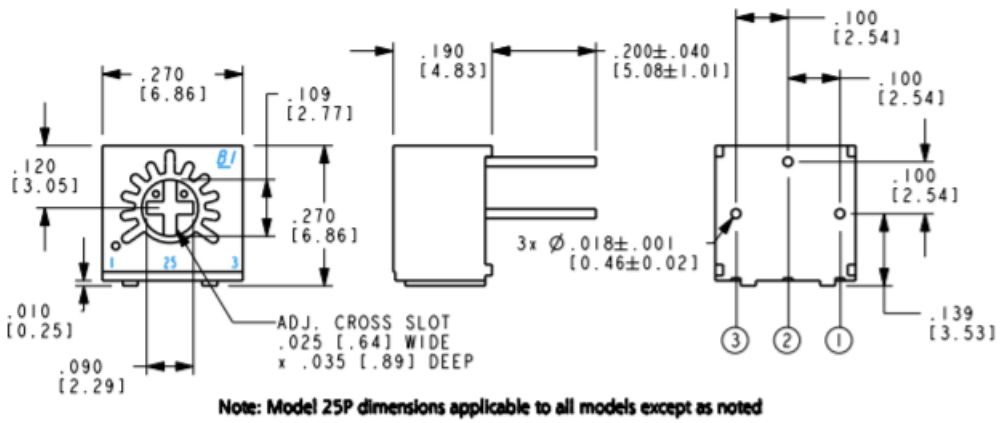


Note: Model 25P dimensions applicable to all models except as noted

MODEL 25U

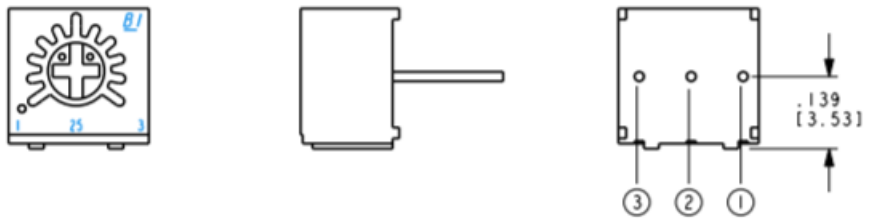

MODEL 25W

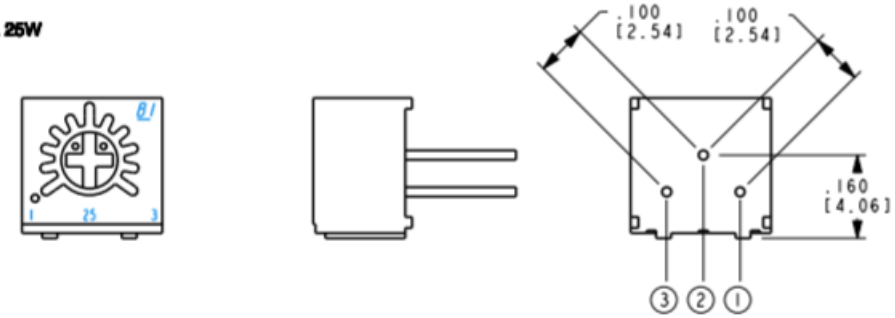


General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
4200 Bonita Place, Fullerton, CA USA 92835-1053 |Ph: +1 714-447-2300
www.ttelectronics.com | sensors@ttelectronics.com

Outline Drawings—Side Adjustment

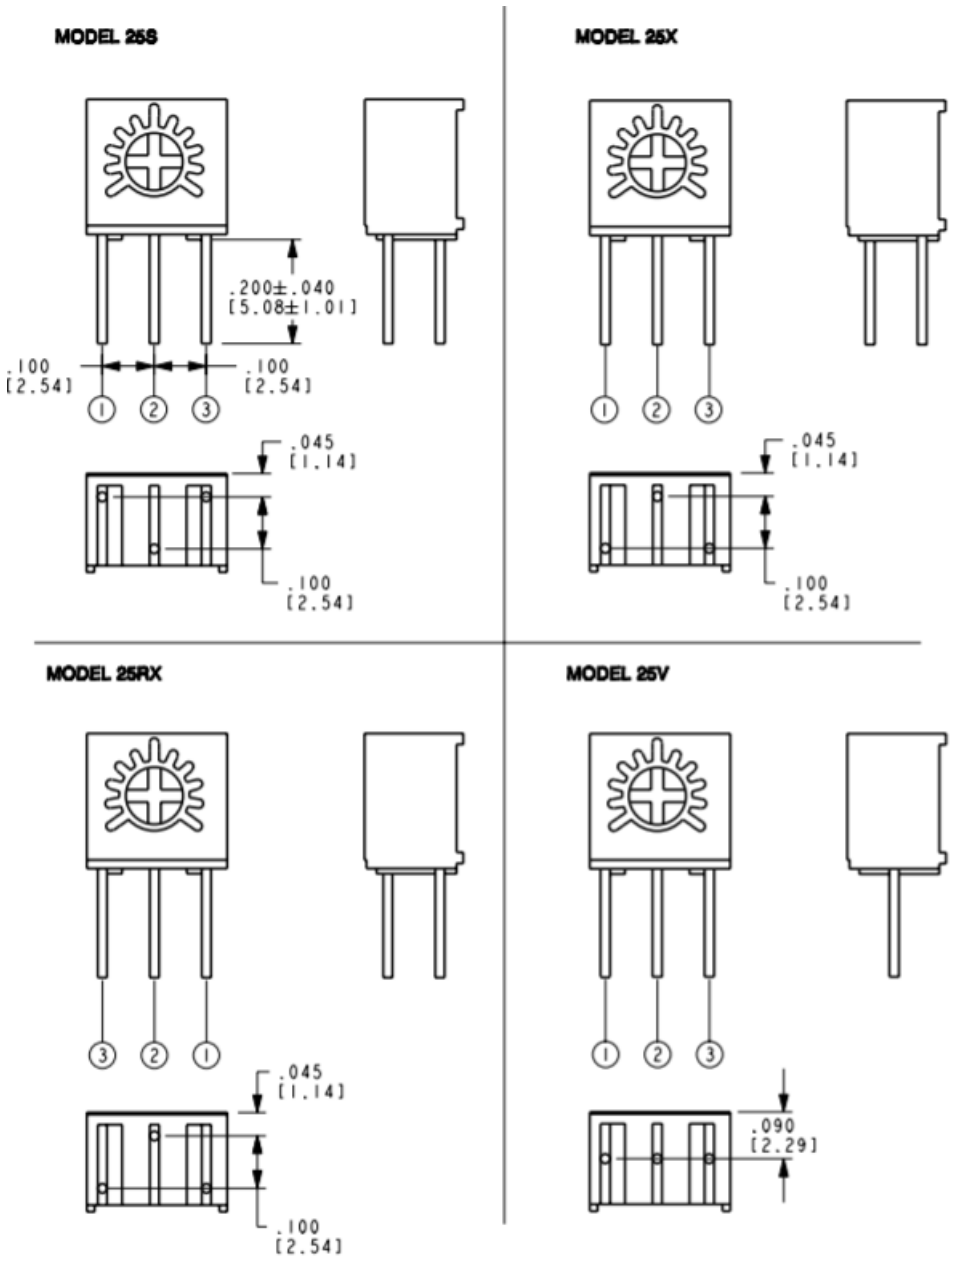

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
4200 Bonita Place, Fullerton, CA USA 92835-1053 |Ph: +1 714-447-2300
www.ttelectronics.com | sensors@ttelectronics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

25PR10K 25UR5KLF 25PR10 25PR100 25PR100K 25PR1K 25PR20 25PR200 25PR200K 25PR20K 25PR2K 25PR50 25PR500 25PR500K 25PR5K 25PR20KLF 25PR250KLF 25PR200LF 25PR1MLF 25PR2M 25PR1M 25PR50KLF 25PR25KLF 25PR1KLF 25PR200KLF 25PR100LF 25PR10LF 25PR500LF 25PR10KLF 25PR500KLF 25PR5KLF 25PR100KLF 25PR25K 25PR50LF 25PR2KLF 25PR250K 25PR2MLF 25PR20LF 25SR10KLF 25VR5KLF 25WR200LF 25SR500KLF 25SR200KLF 25UR10LFTR 25SR50LF 25UR500LF 25UR2MEGLFTR 25WR500KLF 25SR50KLF 25WR200KLF 25WR50LF 25SR500LF 25WR10KLF 25SR2MEGLF 25RXR500KLF 25RXR20KLF 25WR100KLF 25UR1MEGLFTR 25RXR100LF 25UR5KLFTR 25WR10LF 25UR50KLFTR 25XR500KLF 25XR2MEGLF 25UR20LFTR 25SR2KLF 25UR50LFTR 25WR100LF 25XR200KLF 25WR1MEGLF 25XR1MEGLF 25UR200LFTR 25SR20LF 25SR200LF 25UR200KLFTR 25WR2MEGLF 25WR50KLF 25WR20KLF 25RXR200LF 25RXR2KLF 25RXR1KLF 25XR2KLF 25WR2KLF 25SR1MEGLF 25UR100LFTR 25WR500LF 25RXR10LF 25SR10LF 25RXR50LF 25WR25KLF 25XR50KLF 25SR100KLF 25UR10KLFTR 25XR20KLF 25UR500LFTR 25WR20LF 25RXR200KLF 25XR200LF 25RXR10KLF 25WR5KLF