

NOTES:
1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
   BODY – BRASS, NICKEL PLATING
   CONTACT – PHOSPHOR BRONZE, GOLD PLATING
   INSULATOR – PTFE
2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM
   B. FREQUENCY RANGE: DC 0–11 GHz
   C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: – 40°C to +155°C


THIRD ANGLE PROJ.


REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	20–Nov–98	42731	CPM
B	KJ# WAS T6351B1–50	17–Dec–98	42779	CPM
C	REDRAWN TO UPDATE FORMAT	07–May–08	47065	SHE

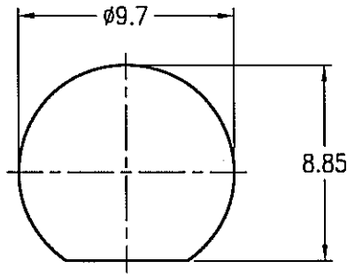


RECOMMENDED
MOUNTING HOLE

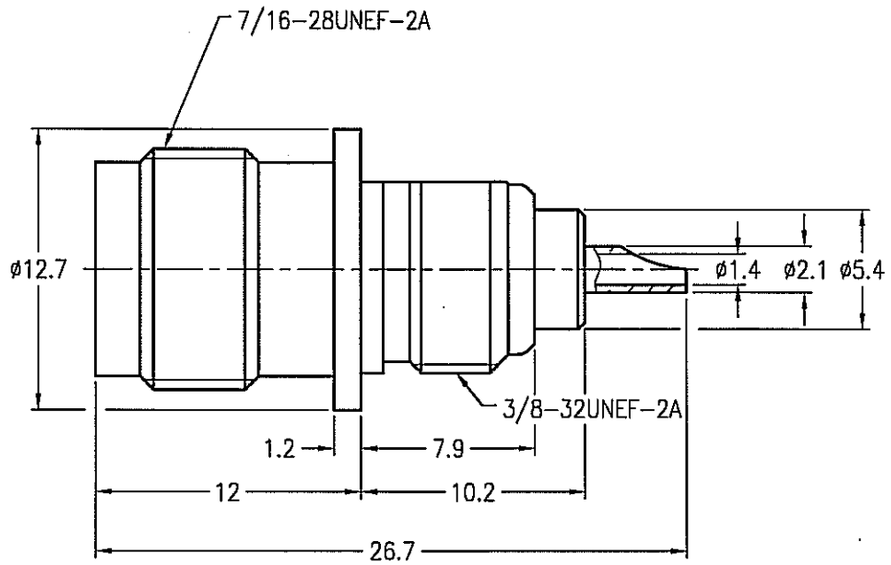

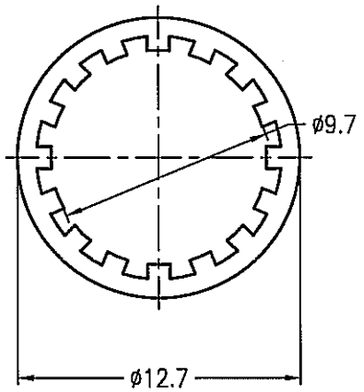

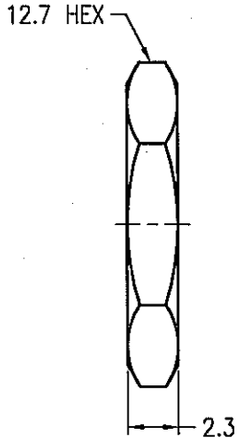

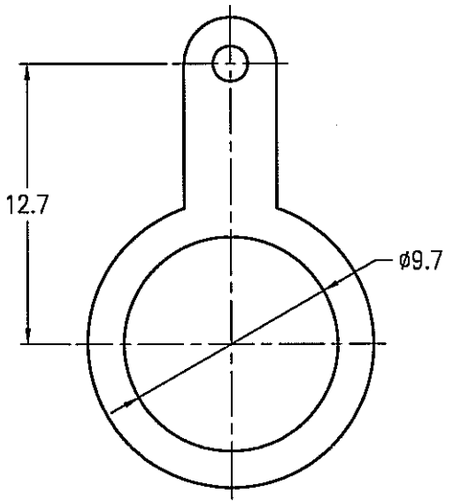

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
0.5 – 6mm ±0.1mm | 6 – 30mm ±0.2mm | 30 – 120mm ± 0.3mm | ANGLES ±1°

NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

FINISH

DRAWN BETTY.L DATE 27–May–05

ENGINEER MARK.C DATE 27–May–05

APPROVED MARK.C DATE 27–May–05

CAD FILE F:\DWG\T\6351B1\50\NT3G–CSZ

TITLE TNC BULKHEAD RECEPT.JACK

SCALE: 2.5/1 | SHEET 2 OF 2

DWG SIZE B | CODE ID 74868 | REV C

Amphenol RF
Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO. T6351B1–NT3G–50

ITEM NO. 026351AAB01NA5F

PART NO. 031–2301–RFX

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

D15P13A6RV12LF 70218-1116LF DEM09P032N 67996-204HLF 86093967896755LF LD15P33E4GV00LF RJE061661210 86093488314745V1LF LD25S33E4GV00LF 69192-408HLF 91614-403ALF RJSBE5080C2 54202-G0805CLF 68001-108HLF 68002116HLF 70234-112LF 95157-140LF 65781-158 86093968191755E3LF CD15S13E4RV09LF DCMF37P 68000-236HLF 68001-200HLF 70430-164LF DAPO15S365TLF 54202-S08-07LF 76384-316LF 86093968813H45V1LF 86130202123355E1LF 863013A