Small Signal Zener Diodes



FEATURES

- Very sharp reverse characteristic
- Very high stability
- Electrical data identical with the devices 1N5221B to 1N5267B
- Low reverse current level
- Standard Zener voltage tolerance ± 5 % with a "B" suffix in the ordering code (e.g.: TZM5221B), suffix "C" is ± 2 % tolerance
- AEC-Q101 qualified
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

RoHS COMPLIANT

APPLICATIONS

- Voltage stabilization

PRIMARY CHARACTERISTICS		
PARAMETER	VALUE	UNIT
V_Z range nom.	2.4 to 75	V
Test current I_{ZT}	1.7 to 20	mA
V_Z specification	Thermal equilibrium	
Int. construction	Single	

ORDERING INFORMATION			
DEVICE NAME	ORDERING CODE	TAPED UNITS PER REEL	MINIMUM ORDER QUANTITY
TZM5221B to TZM5267B	TZM5221B to TZM5267B-series-GS18	10 000 (8 mm tape on 13" reel)	10 000/box
TZM5221C to TZM5267C	TZM5221C to TZM5267C-series-GS18		
TZM5221B to TZM5267B	TZM5221B to TZM5267B-series-GS08	2500 (8 mm tape on 7" reel)	12 500/box
TZM5221C to TZM5267C	TZM5221C to TZM5267C-series-GS08		

PACKAGE				
PACKAGE NAME	WEIGHT	MOLDING COMPOUND FLAMMABILITY RATING	MOISTURE SENSITIVITY LEVEL	SOLDERING CONDITIONS
MiniMELF SOD-80	31 mg	UL 94 V-0	MSL level 1 (according J-STD-020)	260 °C/10 s at terminals

ABSOLUTE MAXIMUM RATINGS (T_{amb} = 25 °C, unless otherwise specified)				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Power dissipation	R_{thJA} = < 300 K/W	P_{tot}	500	mW
Zener current		I_Z	P_{tot}/V_Z	mA
Junction to ambient air	On PC board 50 mm x 50 mm x 1.6 mm	R_{thJA}	500	K/W
Junction temperature		T_j	175	°C
Storage temperature range		T_{stg}	-65 to +175	°C
Forward voltage (max.)	I_F = 200 mA	V_F	1.1	V

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

ELECTRICAL CHARACTERISTICS (T_{amb} = 25 °C, unless otherwise specified)


PART NUMBER	ZENER VOLTAGE RANGE (1)	TEST CURRENT		REVERSE LEAKAGE CURRENT		DYNAMIC RESISTANCE		TEMPERATURE COEFFICIENT
	V_Z at I_{ZT1}	I_{ZT1}	I_{ZT2}	I_R at V_R		Z_Z at I_{ZT1} f = 1 kHz	Z_{ZK} at I_{ZT2} f = 1 kHz	TK_{VZ}
	V	mA		µA	V	Ω		%/K
	NOM.					TYP.	TYP.	
TZM5221	2.4	20	0.25	< 100	1	< 30	< 1200	< - 0.085
TZM5222	2.5	20	0.25	< 100	1	< 30	< 1250	< - 0.085
TZM5223	2.7	20	0.25	< 75	1	< 30	< 1300	< - 0.080
TZM5224	2.8	20	0.25	< 75	1	< 30	< 1400	< - 0.080
TZM5225	3	20	0.25	< 50	1	< 29	< 1600	< - 0.075
TZM5226	3.3	20	0.25	< 25	1	< 28	< 1600	< - 0.070
TZM5227	3.6	20	0.25	< 15	1	< 24	< 1700	< - 0.065
TZM5228	3.9	20	0.25	< 10	1	< 23	< 1900	< - 0.060
TZM5229	4.3	20	0.25	< 5	1	< 22	< 2000	< ± 0.055
TZM5230	4.7	20	0.25	< 5	2	< 19	< 1900	< ± 0.030
TZM5231	5.1	20	0.25	< 5	2	< 17	< 1600	< ± 0.030
TZM5232	5.6	20	0.25	< 5	3	< 11	< 1600	< + 0.038
TZM5233	6	20	0.25	< 5	3.5	< 7	< 1600	< + 0.038
TZM5234	6.2	20	0.25	< 5	4	< 7	< 1000	< + 0.045
TZM5235	6.8	20	0.25	< 3	5	< 5	< 750	< + 0.050
TZM5236	7.5	20	0.25	< 3	6	< 6	< 500	< + 0.058
TZM5237	8.2	20	0.25	< 3	6.5	< 8	< 500	< + 0.062
TZM5238	8.7	20	0.25	< 3	6.5	< 8	< 600	< + 0.065
TZM5239	9.1	20	0.25	< 3	7	< 10	< 600	< + 0.068
TZM5240	10	20	0.25	< 3	8	< 17	< 600	< + 0.075
TZM5241	11	20	0.25	< 2	8.4	< 22	< 600	< + 0.076
TZM5242	12	20	0.25	< 1	9.1	< 30	< 600	< + 0.077
TZM5243	13	9.5	0.25	< 0.5	9.9	< 13	< 600	< + 0.079
TZM5244	14	9	0.25	< 0.1	10	< 15	< 600	< + 0.082
TZM5245	15	8.5	0.25	< 0.1	11	< 16	< 600	< + 0.082
TZM5246	16	7.8	0.25	< 0.1	12	< 17	< 600	< + 0.083
TZM5247	17	7.4	0.25	< 0.1	13	< 19	< 600	< + 0.084
TZM5248	18	7	0.25	< 0.1	14	< 21	< 600	< + 0.085
TZM5249	19	6.6	0.25	< 0.1	14	< 23	< 600	< + 0.086
TZM5250	20	6.2	0.25	< 0.1	15	< 25	< 600	< + 0.086
TZM5251	22	5.6	0.25	< 0.1	17	< 29	< 600	< + 0.087
TZM5252	24	5.2	0.25	< 0.1	18	< 33	< 600	< + 0.088
TZM5253	25	5	0.25	< 0.1	19	< 35	< 600	< + 0.089
TZM5254	27	4.6	0.25	< 0.1	21	< 41	< 600	< + 0.090
TZM5255	28	4.5	0.25	< 0.1	21	< 44	< 600	< + 0.091
TZM5256	30	4.2	0.25	< 0.1	23	< 49	< 600	< + 0.091
TZM5257	33	3.8	0.25	< 0.1	25	< 58	< 700	< + 0.092
TZM5258	36	3.4	0.25	< 0.1	27	< 70	< 700	< + 0.093
TZM5259	39	3.2	0.25	< 0.1	30	< 80	< 800	< + 0.094
TZM5260	43	3	0.25	< 0.1	33	< 93	< 900	< + 0.095
TZM5261	47	2.7	0.25	< 0.1	36	105	< 1000	< + 0.095
TZM5262	51	2.5	0.25	< 0.1	39	125	< 1100	< + 0.096
TZM5263	56	2.2	0.25	< 0.1	43	150	< 1300	< + 0.096
TZM5264	60	2.1	0.25	< 0.1	46	170	< 1400	< + 0.097
TZM5265	62	2	0.25	< 0.1	47	185	< 1400	< + 0.097
TZM5266	68	1.8	0.25	< 0.1	52	230	< 1600	< + 0.097
TZM5267	75	1.7	0.25	< 0.1	56	270	< 1700	< + 0.098

Note

(1) Based on DC measurement at thermal equilibrium; case temperature maintained at 30 °C ± 2 °C


For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

PACKAGE DIMENSIONS in millimeters (inches): **MiniMELF SOD-80**

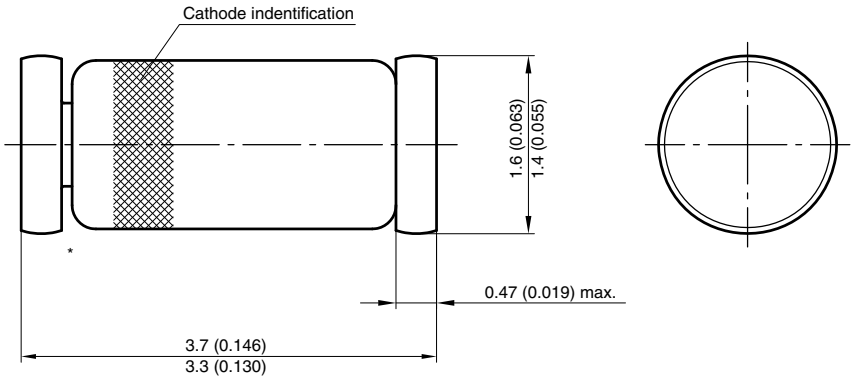

* The gap between plug and glass can be either on cathode or anode side

Foot print recommendation:

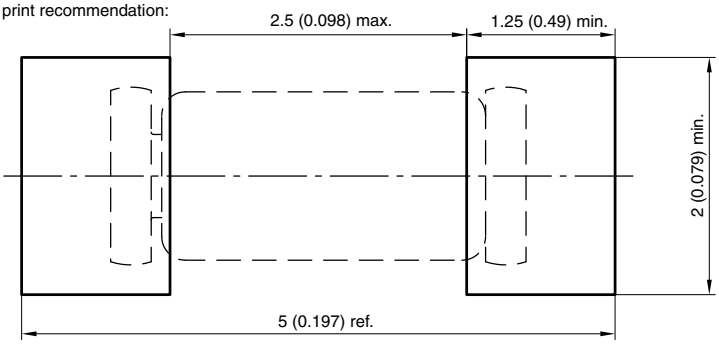

Document no.:6.560-5005.01-4
Rev. 8 - Date: 07.June.2006
96 12070

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay’s knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts. Product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2017 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Vishay Intertechnology:

CCF5510K0FKE36 CRCW1206510KFKEA SM8S43AHE3_A/I CRCW08051M00FKEA LTO150H470R0JTE3
VS-50RIA60 1.5SMC91A-E3/57T BRT13-H-X006 CRCW1206270KJNEA SE20DLGHM3/I
SUD50P04-08-GE3 WSL2512R0300FTB CRCW2512150RFKEGHP ISOA200R11003JT MSS2P3-M3/89A
PR03000204700JAC00 PTF5610K000BYEK SMBJ12CA-E3/52 ILHB1806ER600V PR02000204709JA100
RCL12183R30FKEK SQD50P08-28_GE3 SS2FN6HM3/H CRCW040213K0FKTD PTCCL05H280HTE
RS0105R000FE12 WSL27265L000FEB LTO150H2R200JTE3 PR01000101603JR500
293D337X96R3D2T-E3