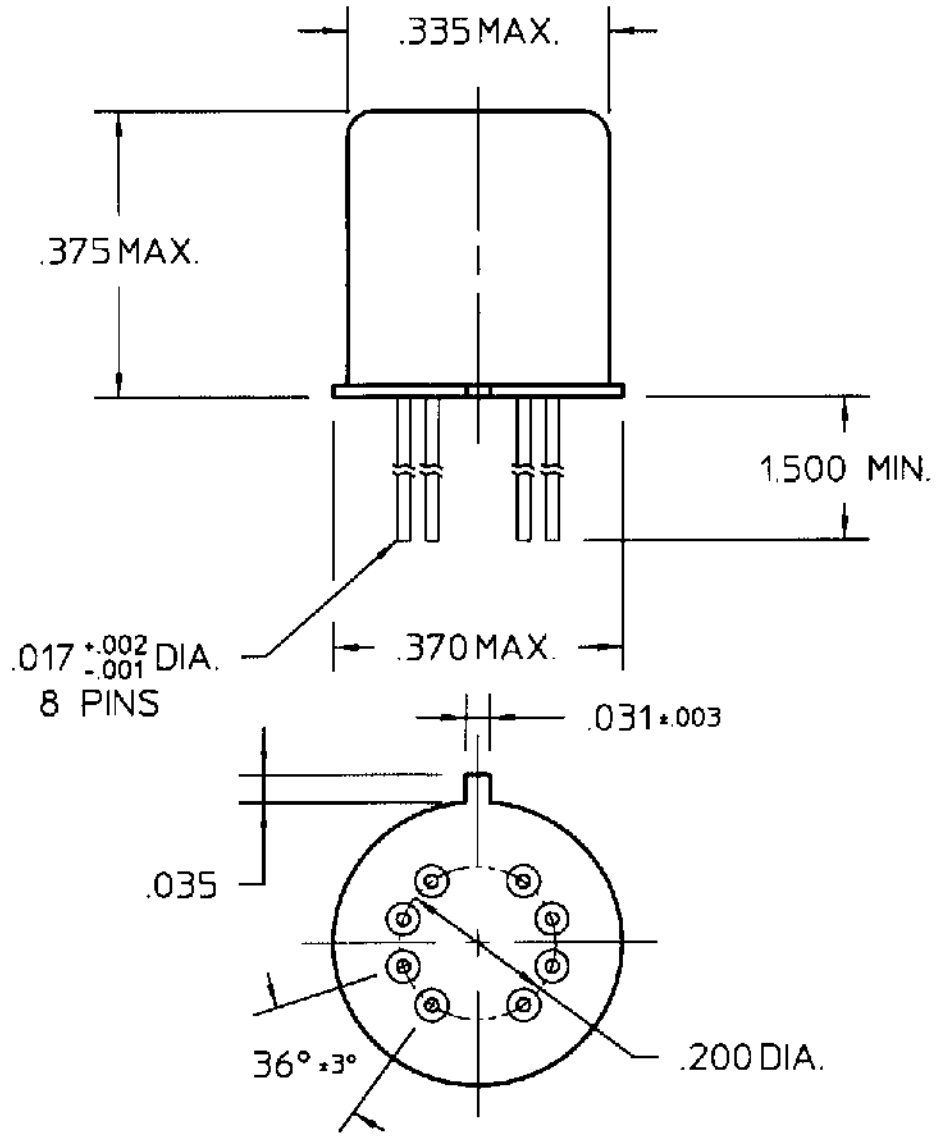


COIL: @ 25°C

RESISTANCE	850 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	4.0 VDC MAX, 0.64 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT STABILIZATION 2.0 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 4/17/97 CK. [illegible] 4/18/97

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/16-019M

TYPE JMSD RELAY

JMSWD-12XM

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1393431-1 SMW73R0JT 1-962915-1 141991-2 2377783-2 U5254-000005-030PA 2005330-1 TE50BR39J 2-292161-3 2380312-2 CPF0402B37K4E1 SBCHE154R7K 1743455-2 1903112-2 3430B2F51RTDF 3631B101LL 936348-1 175977-2 2834055-1 650075-000 SBCHE64R7K 1969656-1 2310537-1 3-1393225-0 917696-1 CRGCQ2010J3K3 MPT100C18RF RH73H2A40MKTN 1-794222-0 ROX05SJ18R