
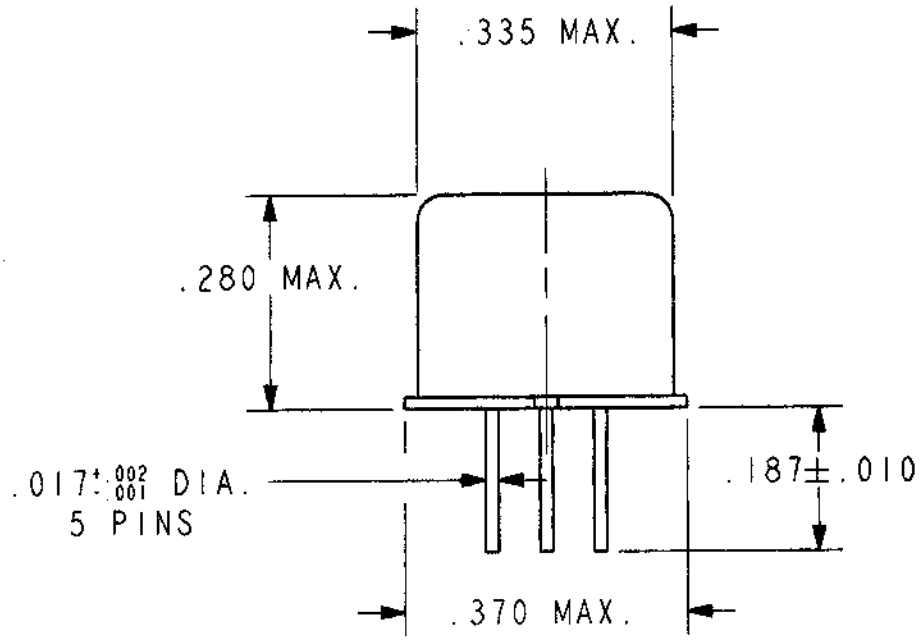


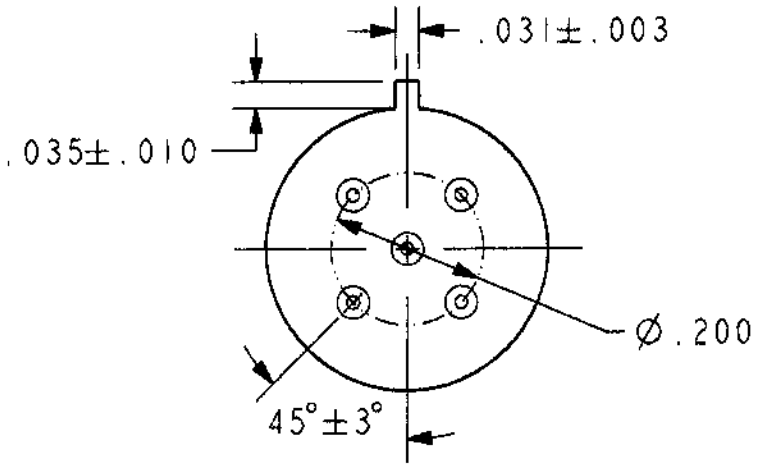

REV. 0
DCO 143304

COIL: @ 25°C

RESISTANCE	2000 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	14.2 VDC
MUST RELEASE	8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT STABILIZATION TIME 2.0 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 11/13/01 11/13/01

CII Technologies
advanced control electronic solutions

CUST. OPL
CUST. NO. M39016/23-024P REV.

"J1MAD" RELAY

J1MAPD-26XP

F-718 REV. 3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2834055-1 SBCHE154R7K 3430B2F51RTDF 650075-000 CPF0402B37K4E1 SMW73R0JT TE50BR39J
1-962915-1 2380312-2 3631B101LL 917696-1 936348-1 SBCHE64R7K 1-794222-0 175977-2 2-292161-3
2310537-1 2377783-2 ROX05SJ18R 1393431-1 141991-2 RH73H2A40MKTN 1969656-1
CRGCQ2010J3K3 U5254-000005-030PA 1743455-2 2005330-1 3-1393225-0 MPT100C18RF 1903112-2