



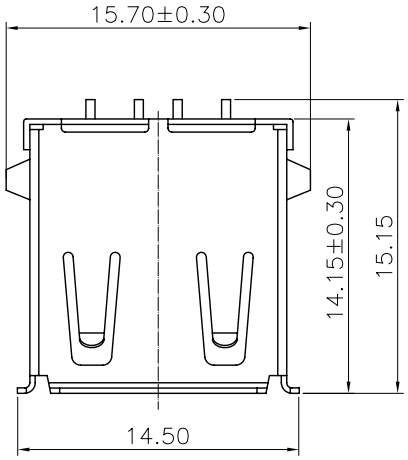


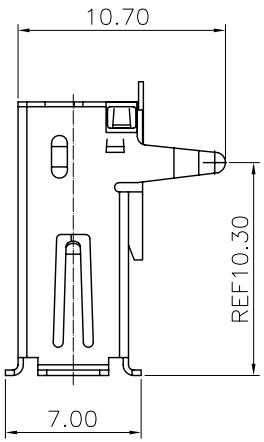

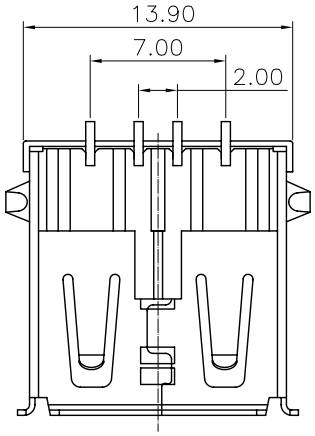

1.MATERIAL:
CONTACTS:PHOSPHOR BRONZE
IMSULATOR:LCP+30% G.F. UL 94V-0
SHELL:BRASS
2.MECHANICAL:
MATING:35N MAX.
WITHDRAWAL FORCE:10N MIN
DURABILITY:1500 CYCLES MIN
3.ELECTRICAL:
CURRENT-MAX[AMPS] 1.5A
VOLTAGE-MAX[VOLTS] 30V
WITHSTANDING VOLTAGE 500V AC
CONTACT RESISTANCE[OHMS] 30milliohms max
INSULATION RESISTANCE [OHMS] 1000 MEGOHMS MIN
4.PLATING:
CONTACTS: GOLD FLASH AND TIN OVER NICKEL PLATED
SHELL:NICKEL OVER ALL PLATING
5.ENVIRONMENTAL
TEMPERATURE RANGE:-55°C+50°C

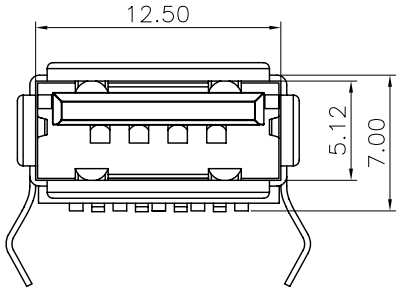

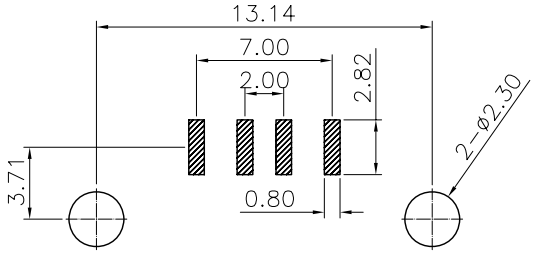

RECOMMENDED P. C. B. PATTERN LAYOUT

09/12/17	ING		NEW DWG		A1
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差參考表		CnC Tech,LLC						
			TITLE: USB 4P A/F SMT 5U"成品					
X.X ±0.38	X.X° ±2°	APPD:	PRODUCT NO: 1002-002-01100					
X.XX ±0.25	X.XX° ±1°	CHECK:	DATE	SCALE	UNIT	TYPE	PAGE	
X.XXX ±0.13	X.XXX° ±0.5°	DRAW:	2009.12.17	1:1	mm	Z	1 / 1	

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

CNC Technology:

520-26-4400-SV-0010F 521-26-04-SV-014F 2000-1-2-41-00-BK 3239-20-1-0500-002-1-TS 3521-08-0101-99
1007-18-1-2000-007-1-TD 1007-20-1-2000-007-1-TS 51025-10-0100-01 1569-18-1-0500-008-1-TS
3122-18-1-0500-002-1-TS 3132-22-1-0500-001-1-TS 3135-18-1-0500-005-1-TS 3132-24-1-0500-002-1-TS
512-26-8800-BL-0007F 521-26-04-SV-005F CNC-SAE-16-183-002 102-1030-BE-00100
1332-22-1-0500-001-1-TS 1569-22-1-0500-007-1-TS 3221-26-0300-00 1002-003-02000
3135-18-1-0500-003-1-TS 3239-16-1-0500-005-1-TS 911S-2-5-00700-PL 1569-22-1-0500-006-1-TS
302-28-26-GR-0100F 3522-20-0100-99 523-26-6600-SV-0010F 743-60010-00200
10064-30-1-0500-007-1-TS