LUCAS-EBA ENCLOSED ROTARY SWITCHES

SWITCH TYPE	MANUFACTURER'S PART NUMBER	RS STOCK NO.
Type MY non-shorting		
1 pole 12 pos	MY1/1 x 12 UT = 12	321-313
2 pole 6 pos	MY1/2 x 6 UT = 12	321-329
4 pole 6 pos	MY2/4 x 6 UT = 12	321-335
Type MY shorting		
1 pole 12 pos	MY1/1 x 12 KT = 12	321-341
2 pole 6 pos	MY1/2 x 6 KT = 12	321-357
Type GX non-shorting		
1 pole 12 pos	GX1/1 x 12 UT = 12	321-363
2 pole 6 pos	GX1/2 x 6 UT = 12	321-379
4 pole 6 pos	GX2/4 x 6 UT = 12	321-385


Rotary Wafer Switches

EBE


Ordering Code (example)

MX 2 / 4 x 5 u, T = 12, with stop
① ② ③ ④⑤ ⑥ ⑦


Ag DAP/PPO –
⑧ ⑨ ⑩

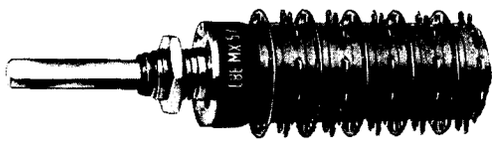

MY: 12 mm diameter MX: 17 mm diameter GX: 25,5 mm diameter



MY with spacers *and dummy wafer*

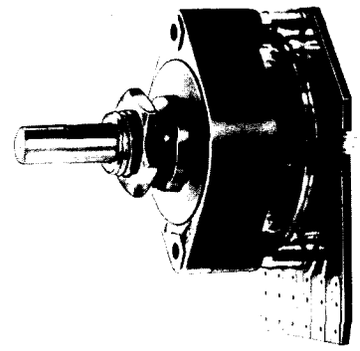


① **Switch type**	**MY**	**MX**	**GX**	**CBS**
Dimension [mm] **Drawing page**	12 ø 12	17 ø 12	25,5 ø 12	30,5 x 49 13
② **Wafer (s) per switch** **max.**	4	6	10	3
③ **Pole (s) per switch** **max.**	6	12	20	3
④ **No of positions (limited by stops)** **max. per wafer**	1 x 10 / 2 x 5 | 1 x 12 / 2 x 6 / 3 x 4 | 1 x 6 / 2 x 3 / 3 x 2	1 x 10 / 2 x 5 | 1 x 12 / 2 x 6 / 3 x 4 / 4 x 3 | 1 x 6 / 2 x 3 / 3 x 2 / 4 x 2	1 x 12 / 2 x 6 / 3 x 4 / 4 x 3 / 6 x 2 | 1 x 6 / 2 x 3 / 3 x 2 / 4 x 2	1 x 10 | 1 x 12 | 1 x 16 | 1 x 20 on request only | 1 x 23 (1 x 24 only without or with fixed stops) | 1 x 31 (1 x 32 only without stops)
⑤ **Contacts** **u = nonshorting (others** **k = shorting see below)**	u / k | u / k | over dummy contacts	u / k | u / k | over dummy contacts	u / k | over dummy contacts	b, bk | b, bk / g, gk | b, bk / g, gk | b, bk | b, bk / g, gk | b, bk / g, gk
⑥ **Indexing**	*T* = 10 (36°) | *T* = 12 (30°) | *T* = 6 (60°)	*T* = 10 (36°) | *T* = 12 (30°) | *T* = 6 (60°)	*T* = 12 (30°) | *T* = 6 (60°)	*T* = 10 (36°) | *T* = 12 (30°) | *T* = 16 (22,5°) | *T* = 20 (18°) | *T* = 24 (15°) | *T* = 32 (11,25°)
⑦ **Stops (with or without)**	Fixed (factory fitted to order)	Fixed (factory fitted to order)	Fixed (factory fitted to order)	Adjustable
⑧ ***Contact material***	Ag + gold flash Au (5 µm) + gold flash only T = 12/6: Au (1 µm) + gold flash	Ag + gold flash Au + gold flash	Ag + gold flash Au + gold flash *Ag/Pd 70/30* + gold flash	Au
⑨ **Insulating material** **Stator** **Rotor**	DAP Noryl	DAP PPO	DAP PPO	Epoxy paper
⑩ **Please specify special features**				A: Solder and plug connection B: Pins for PCB C: Pins for Mini Wire Wrap *D: For ribbon cable (on request)*
Resistive load max. [VA]	Ag: 5 Au: 3	Ag: 10 Au: 6	Ag: 15 Au: 10	3
Current switching max. carrying [A]	Ag: 0,2 Au: 0,1 1,5	Ag: 0,5 Au: 0,25 2	Ag: 0,5 Au: 0,25 2	0,1 1
Voltage switching max. [V]	Ag: 115 ≅ Ag: 60 ≅	Ag: 115 ≅ Ag: 60 ≅	Ag: 125 ≅ Ag: 60 ≅	60 ≅
Initial contact resistance [m Ω]	Ag: ≦ 20 Ag: ≦ 25	Ag: ≦ 20 Ag: ≦ 25	Ag: ≦ 20 Ag: ≦ 25	≦ 110
Proof voltage contacts frame [V_{eff}]	700 800	900 1000	1000 1300	500 700
Insulation resistance [Ω]	≧ 1 x 10^{11}	≧ 1 x 10^{11}	≧ 1 x 10^{11}	≧ 5 x 10^{10}
Life [Cycles]	≧ 25000	≧ 25000	≧ 25000	≧ 25000
Temperature range [°C]	−40°...+85°	−40°...+85°	−40°...+85°	−40°...+85°
Stop strength max. [Nm]	0,5	0,7	1,25	1,5
Operating torque with 1 wafer [Nm]	0,03	0,035	0,06	0,09
Special features				
⑤ **Alternative contact arrangements** **b = binary code** **bk = binary compl. code** **g = gray code** **gk = gray code compl.** ***hd = hexadecimal***	Mounting bush water sealed Binary and binary complement coded on two wafers, Spacers between wafers (T = 12) Special cut-out of contactrings Type MZ is a combination of a MX mechanism and MY wafers, only T = 12 (30°)	Same as MY, plus Dual concentric shaft MXR: First or last position *biased to next* MXS: Push to turn feature S40MX: Key operated switch	Same as MY plus Dual concentric shaft	Mounting bush water sealed Additional attached std. BS wafers (page 5) With diodes for decoupling Dual concentric shaft Pins for P.C.B. or Mini Wire Wrap


Dimensions

EBE

MY

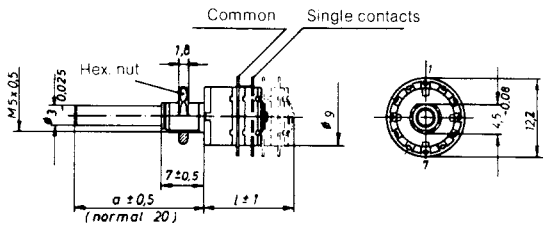


Mounting hole in panel

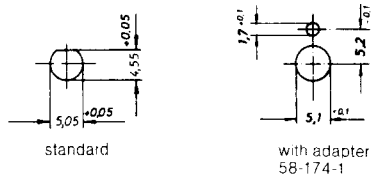


No. of wafers	1	2	3	4
l =	10	14	18	22

Standard shaft length a = 20 ±0,5 mm
Mounting bush water sealed:
Bush length 6,5 mm; dimension l = + 0,5 mm.

MX

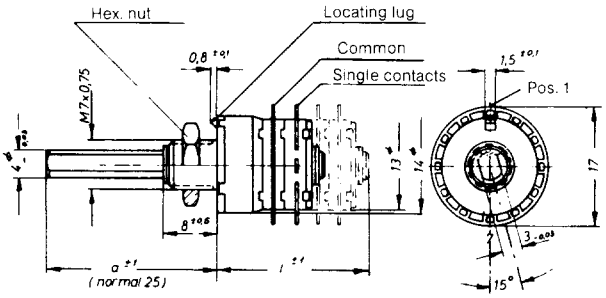


Mounting hole in panel

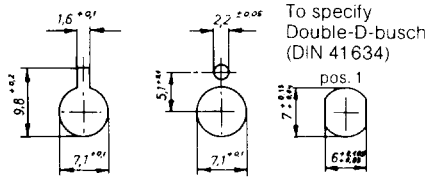


No. of wafers	1	2	3	4	5	6
l =	16	22,5	29	35,5	42	48,5


Standard shaft length a = 25 ±0,5 mm
On request shaft 4 mm ø round.
Mounting bush water sealed: Bush length 7 mm;
shaft 4 mm ø round; mounting hole DIN 41634.

GX

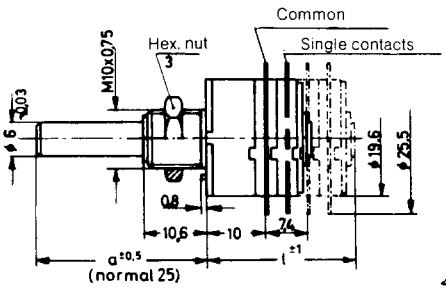

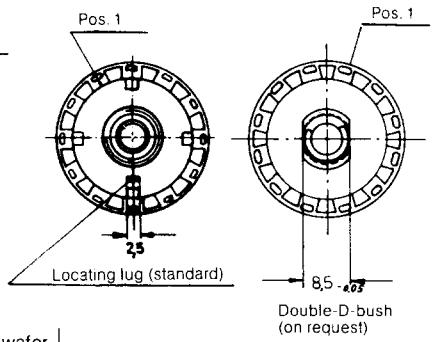

Mounting hole




No. of wafers	1	2	3	each add. wafer
l =	19	26	33,5	7,4

Standard shaft length a = 25 ±0,5 mm
Drawing for sealed bush on request.


Standard contact arrangements

MY and MX

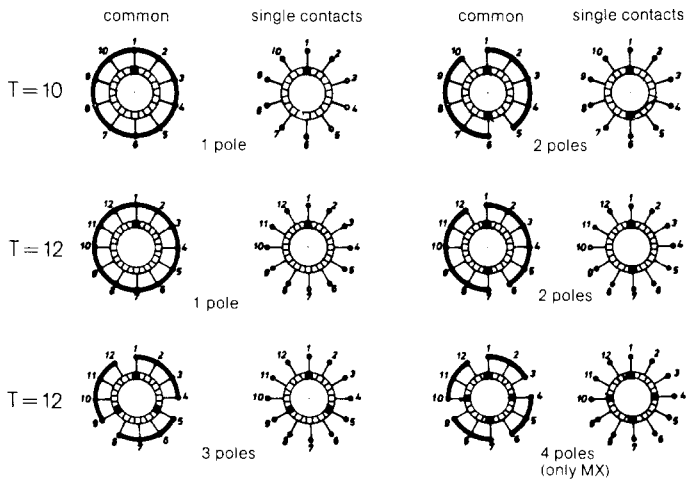

T = 6 *First contacts same, but used only every second*

GX

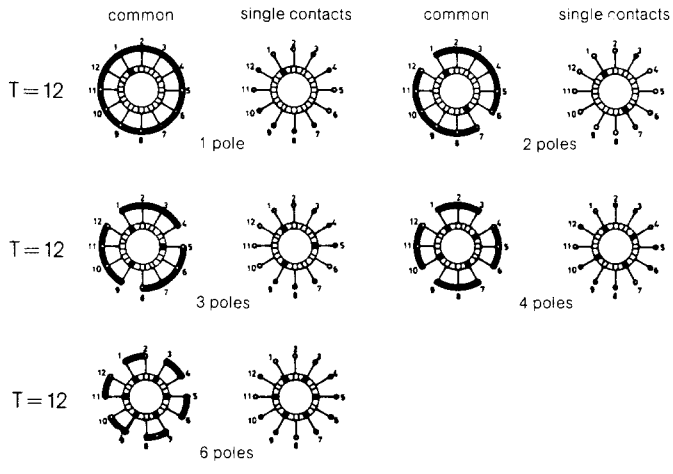

T = 6 First contacts same, but used only every second

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

NSF Controls:

221805-000-008-000 454479/2/MK 459103JMK1 500395-000-000-000 454479MK 454481MK 454482MK 457841/1/MA 459102JMK2 500399-000-000-000 MU454488FPA(MK) 221805-000-004-000 454480/2/MK 454483MK 457847MA 500401-000-000-000 MU 454883FPA(MA) MU457848FPA(MA) 457844/1/MA MU452273MSD1 221995-000-003-000 454480MK 457843/1/MA 457845/1/MA 457846MA MU452274MSD1 457842/1/MA 500398-000-000-000 500400-000-000-000