



RoHS


MAPX	MODIFICATION	DRW	DATE

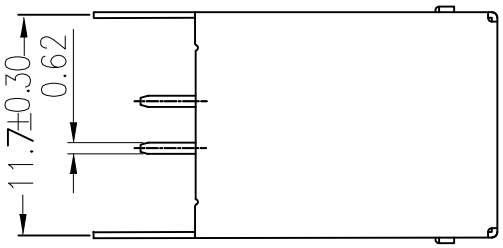




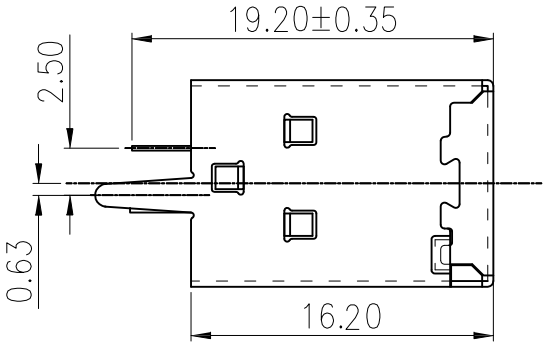



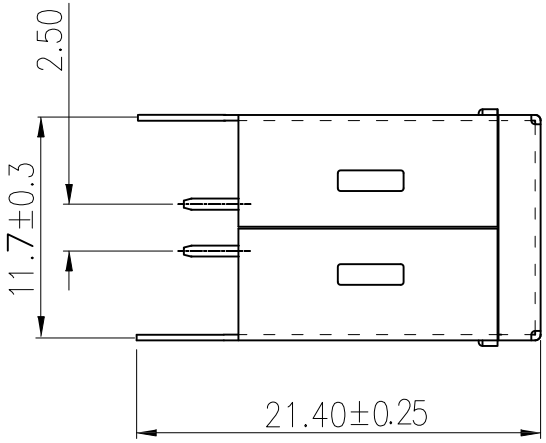

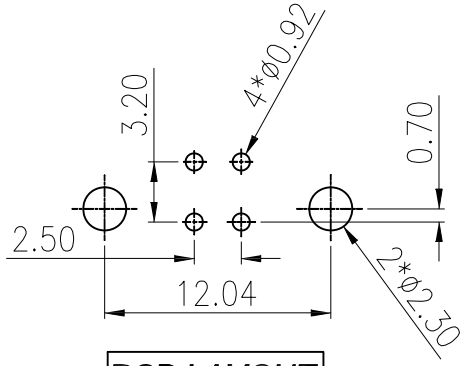

PCB.LAYOUT

NOTES:
1.MATERIAL:
1.1 Housing:PBT ,UL94-HB
1.2 terminals:Copper Alloy
Gold plated in contact area:
Tin 40u"min plated in termination
Nickel Plated overall
1.3 Shell:SPCC t=0.30mm,
Nickel 40u"min Plated overall
2.ELECTRICAL CHARACTERISTICS:
2.1 Rating Current :1.5 Ampere
2.2 Rating Voltage :30 V Max
2.3 Contact Resistance:30 Milli ohms
2.4 Insulation Resistance:1000 Mega ohms Min.
3.MECHANICAL CHARACTERISTICS:
3.1 Connector Mating force: 35N MAX(3.57Kgf)
3.2 Connector Unmating force:10N min(1.02Kgf
3.3 Durability:1500Cycles.
4.ENVIRONMENT CHARACTERISTICS:
4.1 Operating temperature:-0℃ to +50℃
4.2 Storage temperature:-20℃ to +60℃

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.35	X.	±5.°
.X	±0.30	.X	±2.°
.XX	±0.20	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing Tuo Jin Electronics Co., Ltd.

单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	921-121A1010Y10200
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	BF 180度铁壳直脚L16.2白胶
日期 DATE	2021-04-15	核准 APPD	黄国荣	角法 VIEW	版本 VER A0

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Jing extension:

906-552A1012D10200 908-351A1011D10100 920-C52A2021S10105 904-232B2032S10100
905-761A2032S10200 911-221A2021S10100 919-162A1012D10400 912-312A1012D10100
917-B88C201AH70201 917-P81A202ES60201 920-F52A2021S10105 904-232A2031S10100
904-331B2032S10200 906-752B1114D10200 912-112A2021S10100 907-111A1022D10200
907-312A1101Y10210 918-415K3028S40000 920-154A2021Y10110 912-112A1011D10100
916-151A1022Y10200 918-418K2022Y40011 918-468K2029Y50000 920-A62A2021S10108
906-262A1021D10200 910-151A2021D10100 920-A62A2021S10104 920-A64A2091S101A3
918-318K2023C40005 920-C62A2021S10103