
Accessories
Compression Fitting
For Temperature Sensors
CF-M-6-G1/4-A4

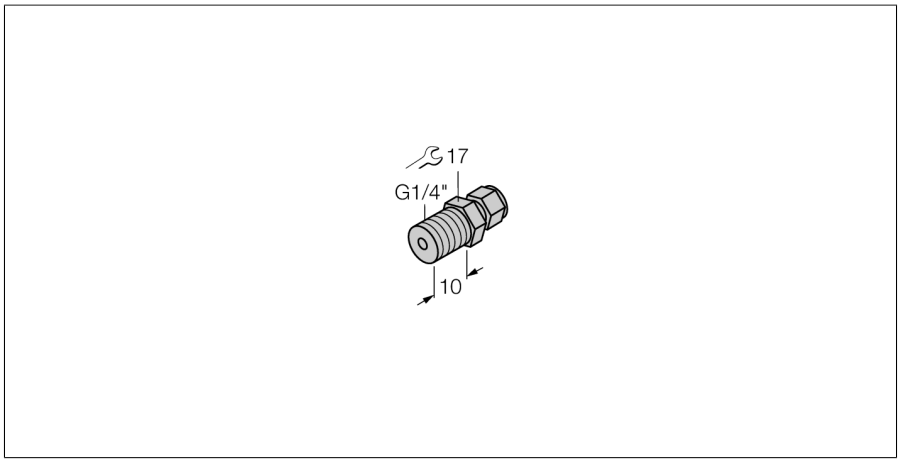

- Compression fittings for direct mounting of TP temperature probes
- Metal compression fitting
- For probe with 6 mm diameter
- Process connection G1/4" male thread

General description

With compression fittings, probes can be mounted directly where they are needed and they can be immersed as deep as wanted. Through direct contact with the medium, they react immediately to temperature changes.

Type	CF-M-6-G1/4-A4
ID	9910483

Temperature range	
Measuring range	-50…350 °C
Measuring range	-58…662 °F

Mechanical data	
Housing material	Stainless steel, 1.4404 (AISI 316L)
Sealing material	stainless steel
Internal diameter	7 mm
Process connection	G 1/4" male thread
Process Pressure	100 bar
Max. tightening torque of housing nut	100 Nm

Edition • 2023-07-21T16:39:26+02:00

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TURCK:

NI12U-S18-AP6X NI30U-M30-AN6X-H1141 BC5-Q08-AP6X2-V1131 BI30U-CP40-AP6X2 BIM-IKM-AP6X2-H1141/S34 W/KLI-3 BIM-IKT-AP6X C4-A40FX/024VDC IM33-11EX-HI/24VDC Bi5-G18-Y1X 6936233 RKC8T-2/TXL BIM-UNT-AP6X-0.3-PSG3M MFKS 3-1 NI 8U-M12-AN6X-H1141 NI10-G18-AZ3X-B1431 50MM RK 4T-4/S618 NI100U-K90SR-VP4X2-H1141 C9-A41BX/024VADC FS 4.4-0.5/14.5/NPT RKM 30-2M BI 5-M18-Y1X-H1141 BI10-M30-AP6X-H1141 IM31-22EX-I BI4-M12-AN6X-H1141 Bi 8U-M18-AP6X NI 4U-Q8SE-AP6X NI10U-M12-AP6X TX1-Q20L60 BI10U-Q14-AP6X2-V1131 NI10U-M12E-AP6X-H1141