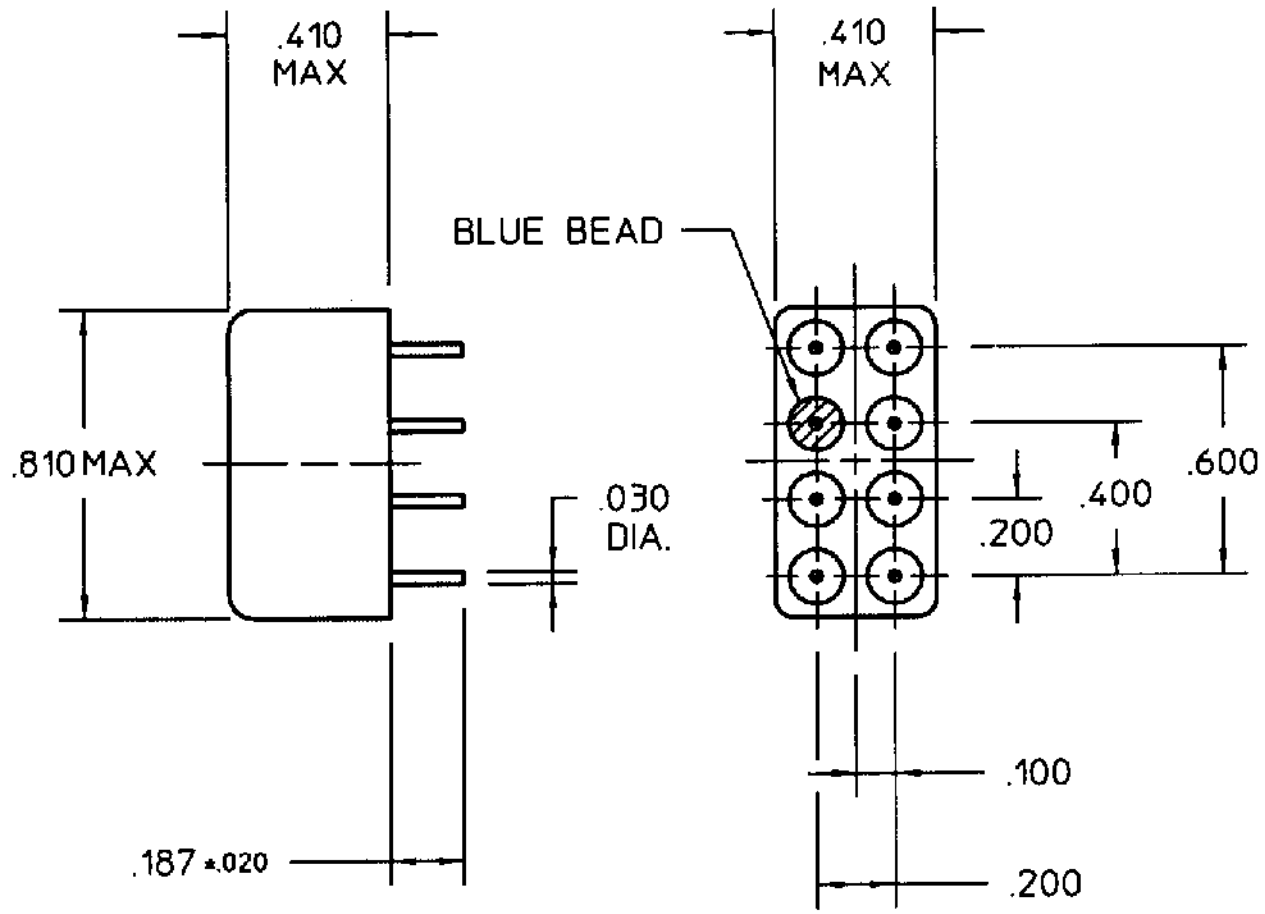


COIL: @ +25 °C

RESISTANCE	47 OHMS ± 10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.2 VDC
MUST RELEASE	1.32 VDC MAX, 0.21 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX
RELEASE 5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX

CUST. OPL
CUST. NO. M39016/44-008M

TYPE "HMS" RELAY

CUSTOMER DATA SHEET

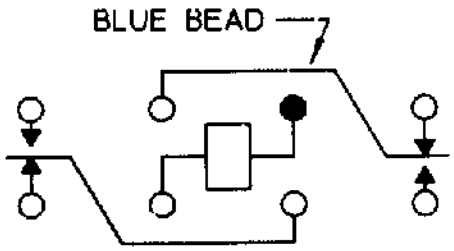

CONTACT RATING: 2 AMPS 28 VDC
0.1 AMP 115 VAC RESISTIVE 0.5 AMPS
28 VDC INDUCTIVE 100,000 OPERATIONS

DR. R.B. 11/7/94 | CK. 11/7/94

COMMUNICATIONS INSTRUMENTS, INC.

HMS1201S108M

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1903112-2 SMW73R0JT TE50BR39J 1-962915-1 2-292161-3 MPT100C18RF ROX05SJ18R CPF0402B37K4E1 2005330-1 2310537-1 2834055-1 3631B101LL 936348-1 1743455-2 175977-2 141991-2 2380312-2 650075-000 917696-1 RH73H2A40MKTN SBCHE154R7K 1-794222-0 1393431-1 1969656-1 SBCHE64R7K CRGCQ2010J3K3 2377783-2 3-1393225-0 3430B2F51RTDF U5254-000005-030PA