



| 版次(Edition) | 变更摘要(Change The Content) | 日期(Date) |
|---|---|---|
| 1 | 增加料号说明(Add Material Number Description) | 2020/11/24 |


| 序号(NO.) | 品名(Name) | 材质(Material) |
|---|---|---|
| ① | 0.5掀盖胶芯(H=2.0) 0.5 Pitch Easy-on Type Housing (H=2.0) | LCP UL94V-0 本色 **Natural** |
| ② | 0.5掀盖端子(H=2.0) 0.5 Pitch Easy-on Type Terminal (H=2.0) | 磷青铜/表面镀锡 Phosphor Bronze/ Tin Plating |
| ③ | 0.5掀盖后盖(H=2.0) 0.5 Pitch Easy-on Type Actuator (H=2.0) | LCP UL94V-0 黑色 **Black** |
| ④ | 0.5掀盖焊片(H=2.0) 0.5 Pitch Easy-on Type Fitting Nail (H=2.0) | 磷青铜/表面镀锡 Phosphor Bronze/ Tin Plating |

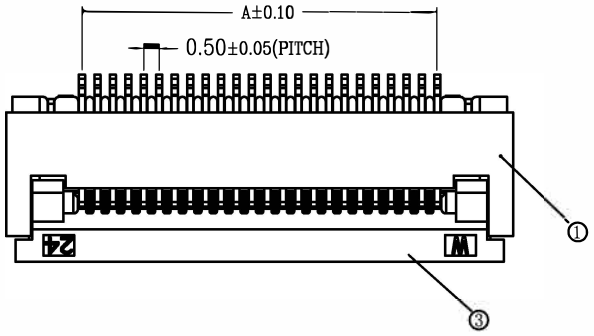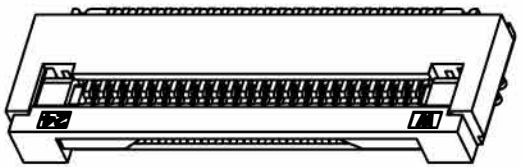


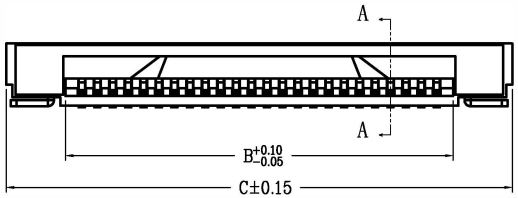



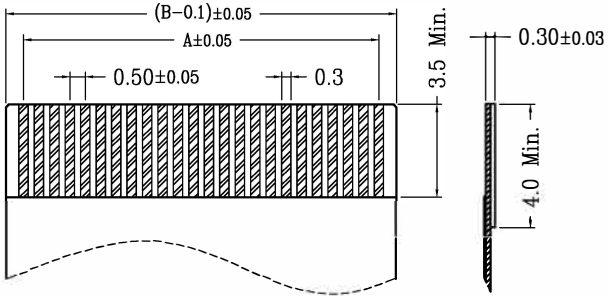



SECTION A-A




适用扁平线(Applicable Flat Cable)

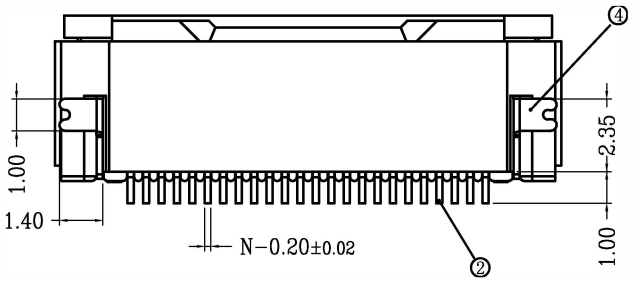
| CKT | A | B | C | CKT | A | B | C |
|---|---|---|---|---|---|---|---|
| 4 | 1.50 | 2.56 | 6.40 | 34 | 16.50 | 17.56 | 21.40 |
| 5 | 2.00 | 3.06 | 6.90 | 35 | 17.00 | 18.06 | 21.90 |
| 6 | 2.50 | 3.56 | 7.40 | 36 | 17.50 | 18.56 | 22.40 |
| 7 | 3.00 | 4.06 | 7.90 | 37 | 18.00 | 19.06 | 22.90 |
| 8 | 3.50 | 4.56 | 8.40 | 38 | 18.50 | 19.56 | 23.40 |
| 9 | 4.00 | 5.06 | 8.90 | 39 | 19.00 | 20.06 | 23.90 |
| 10 | 4.50 | 5.56 | 9.40 | 40 | 19.50 | 20.56 | 24.40 |
| 11 | 5.00 | 6.06 | 9.90 | 41 | 20.00 | 21.06 | 24.90 |
| 12 | 5.50 | 6.56 | 10.40 | 42 | 20.50 | 21.56 | 25.40 |
| 13 | 6.00 | 7.06 | 10.90 | 43 | 21.00 | 22.06 | 25.90 |
| 14 | 6.50 | 7.56 | 11.40 | 44 | 21.50 | 22.56 | 26.40 |
| 15 | 7.00 | 8.06 | 11.90 | 45 | 22.00 | 23.06 | 26.90 |
| 16 | 7.50 | 8.56 | 12.40 | 46 | 22.50 | 23.56 | 27.40 |
| 17 | 8.00 | 9.06 | 12.90 | 47 | 23.00 | 24.06 | 27.90 |
| 18 | 8.50 | 9.56 | 13.40 | 48 | 23.50 | 24.56 | 28.40 |
| 19 | 9.00 | 10.06 | 13.90 | 49 | 24.00 | 25.06 | 28.90 |
| 20 | 9.50 | 10.56 | 14.40 | 50 | 24.50 | 25.56 | 29.40 |
| 21 | 10.00 | 11.06 | 14.90 | 51 | 25.00 | 26.06 | 29.90 |
| 22 | 10.50 | 11.56 | 15.40 | 52 | 25.50 | 26.56 | 30.40 |
| 23 | 11.00 | 12.06 | 15.90 | 53 | 26.00 | 27.06 | 30.90 |
| 24 | 11.50 | 12.56 | 16.40 | 54 | 26.50 | 27.56 | 31.40 |
| 25 | 12.00 | 13.06 | 16.90 | 55 | 27.00 | 28.06 | 31.90 |
| 26 | 12.50 | 13.56 | 17.40 | 56 | 27.50 | 28.56 | 32.40 |
| 27 | 13.00 | 14.06 | 17.90 | 57 | 28.00 | 29.06 | 32.90 |
| 28 | 13.50 | 14.56 | 18.40 | 58 | 28.50 | 29.56 | 33.40 |
| 29 | 14.00 | 15.06 | 18.90 | 59 | 29.00 | 30.06 | 33.90 |
| 30 | 14.50 | 15.56 | 19.40 | 60 | 29.50 | 30.56 | 34.40 |
| 31 | 15.00 | 16.06 | 19.90 | 61 | 30.00 | 31.06 | 34.90 |
| 32 | 15.50 | 16.56 | 20.40 | 64 | 31.50 | 32.56 | 36.40 |
| 33 | 16.00 | 17.06 | 20.90 | 65 | 32.00 | 33.06 | 36.90 |

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C~85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance):≥500MΩ.
6. 产品料号(Product material No.):

XW05202A—** * *—**

- NO OF CKT(产品PIN数)
- Plating(电镀方式)
  - 0:端子全雾锡(Terminal all mist tin)
  - 1:端子全金(Terminal G/F OVERALL)
- Packing(包装方式)
  - T:TUBE管装
  - R:TAPE & REEL卷装
- DH 后盖有LOGO:DH(Actuator with LOGO:DH)
- 空白 后盖无LOGO(Actuator without LOGO)

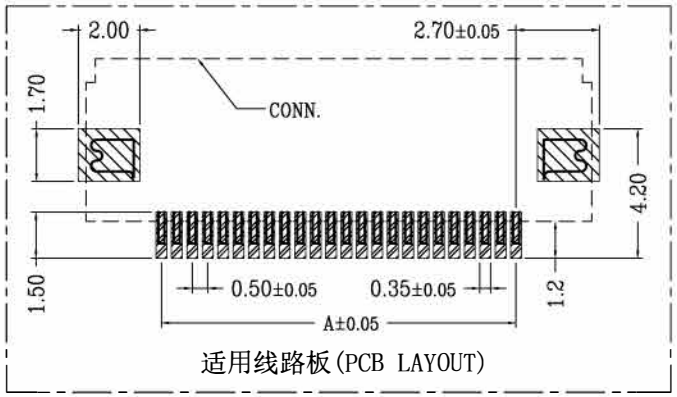


适用线路板(PCB LAYOUT)

RoHS

一般公差(TOLERANCE)
X ±.50 XX ±.10
X ±.20 XXX ±.05
ANGLES ±1°

深圳市宝通成电子有限公司

品名 (TITLE): 0.5 Pitch掀盖卧式下接(H=2.0)
0.5 Pitch H2.0 Easy-on R/A Lower Type SMT CONN.

料号 (DWG.NO): XW05202A-****-**

制图 (DR): Anlan
校对 (CHKD): 曹琴
审核 (APPD): 王涛

比例 (SCALE): 1:1
单位 (UNITS): mm
张数 (SHEET): 1 OF 1
SIZE: A4
REV: A