



由 Autodesk 教育版产品制作

| 目錄 MAPX | 设变内容 MODIFICATION | 日期 DATE |
|---|---|---|
| | | |

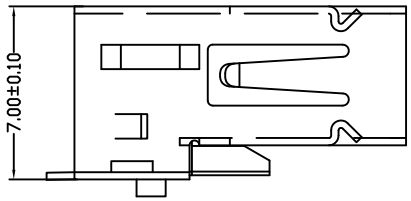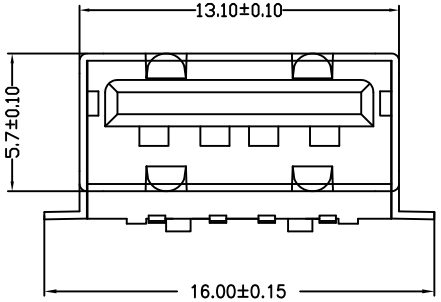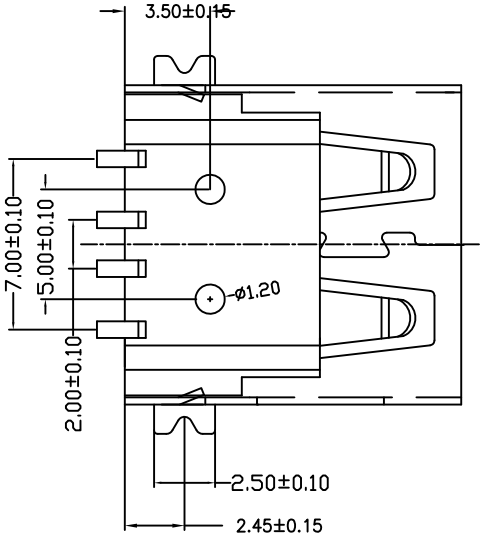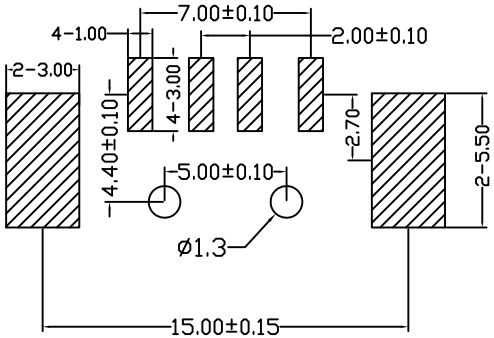


PCB:LAYOUT

备注：侧弹分为外弹与内弹

NOTES:
Housing: Thermoplastics
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating: 1.5 AMP. 30V AC
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 30 MΩ Max.
Dielectric Withstanding Voltage: 500W AC
Temperature Range: −35℃ to +85℃
Insulator color: Black/White
Plastic material: PBT/LCP/Others
Shell finish: Nickel plated/Tin-Lead plated
Mechanical:
Mating Force: 3.5KG MAX
Unmating Force: 0.7 KG MIN.
Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

产品图 PRODUCT CHART DWG

公差一览表 TOLERANCE UNLESS OTHERWISE

| | | | |
|---|---|---|---|
| X. | ±0.25 | X°. | ±5° |
| .X | ±0.20 | .X° | ±2° |
| .XX | ±0.15 | .XX° | ±1° |
| .XXX | ±0.10 | .XXX° | ±0.5° |

# 深圳市精拓金电子有限公司

| | | | | | |
|---|---|---|---|---|---|
| 单位 UNITS | MM | 制图 DRAWING | Z-Y-B | 产品料号 PRODUCT PART NO. | 904-241A2022S10100 |
| 比例 SCALE | 1:1 | 审核 CHKD | | 产品名称 PRODUCT NO. | AF鱼叉脚贴板无边内弹铁壳LCP黑胶1.2柱 |
| 日期 DATE | 2009/10/20 | 核准 APPD | | 角法 VIEW | 版本 VER: A0 |

由 Autodesk 教育版产品制作

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## Jing extension:

907-312A1101Y10210 916-151A1022Y10200 920-A62A2021S10108 920-C52A2021S10105
920-C62A2021S10103 911-221A2021S10100 917-B88C201AH70201 918-418K2022Y40011
906-552A1012D10200 907-111A1022D10200 910-151A2021D10100 912-112A1011D10100
918-318K2023C40005 904-232B2032S10100 905-761A2032S10200 912-112A2021S10100
920-A64A2091S101A3 912-312A1012D10100 918-415K3028S40000 920-154A2021Y10110
920-F52A2021S10105 919-162A1012D10400 904-232A2031S10100 906-262A1021D10200
906-752B1114D10200 904-331B2032S10200 908-351A1011D10100 917-P81A202ES60201
918-468K2029Y50000 920-A62A2021S10104