


ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

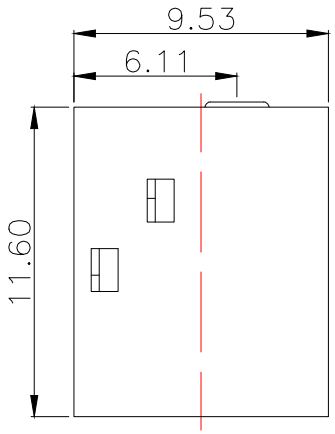


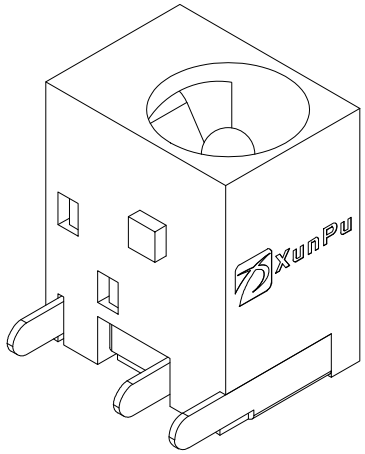




RECOMMEND PULG

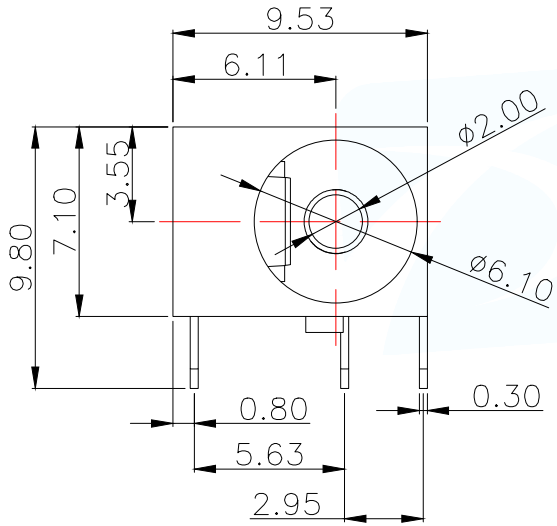


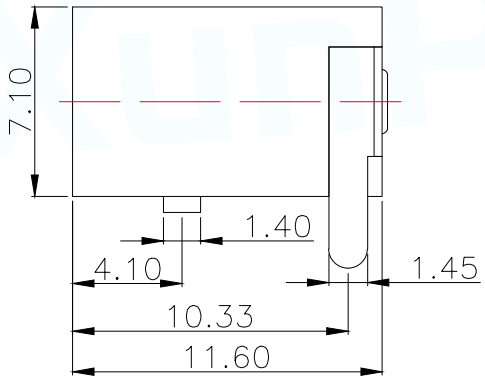

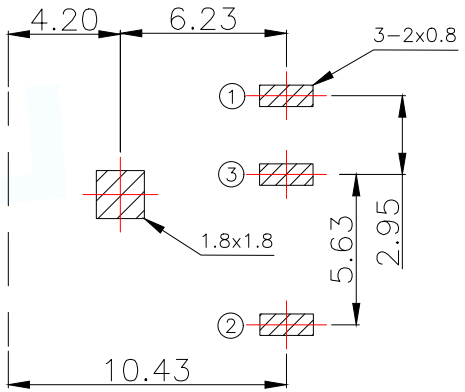

PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance	
Rated electrical load	DC 24V 2.5A
Contact resistance	≤0.03Ω
Insulation resistance	≥100MΩ DC250V
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20C°~+70C°
service life	5000cycles



SCHEMATIC

LTR	PART NAME	QTY	MATERIAL	REMARK
4	TERMINAL	1	BRASS	MB:CuSn PLATED
3	HOUSING	1	PPA	BLACK
2	TIP SPRING	1	PHOSPHOR BRONZE	MB:CuSn PLATED
1	CENTER PIN	1	BRASS	MB:CuSn PLATED

MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co,Ltd

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS:	ANGLES:
X.X±0.30	X.°±5°
X.XX±0.25	X.X°±1°
X.XXX±0.15	

CUSTOMER COPY

TITLE: DC SOCKET

PAR	DC-044-B200	
DWN		
CHKD		
APVD		
SCALE N:A	UNIT:MM	
SIZE:A4	SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-1.0AX-4PWCR-H25 WAFER-MX1.25B-8PWB WAFER-WBM4.2-16PJK-GB WAFER-XH2.54-4PWZ-H62 FPC-0.5AX-30PWCR-H20 MU-103-ARW64 WAFER-PH2.0-2PJK WAFER-PH2.0-8PLB WAFER-VH3.96-4PLB FPC-0.5FX-4PWCR-H20 FPC-1.0HF-4PWAR-H20 PHB2.0-02-20PZZ SMA-KWE-323C-H13X23-LW FPC-0.5AL-6PB FPC-0.5FX-4PWBH15 FPC-0.5HF-10PWBR-H20 HDMI-212L RJ45-005-014-11 WAFER-PH2.0-11PZZ FPC-0.5AS-5PWCR-H20 FPC-0.5FX-16PWCR-H20 WAFER-PH2.0-6PWB DC-031A-A100 FPC-0.5FX-20PWBH15 FPC-1.0AX-14PWCR-H25 WAFER-PH2.0-3PWB FPC-0.5AX-24PWCR-H20 TYPEC-304YDSW-ACP16 WAFER-GH1.25-6PLB FPC-0.5FX-14PWCR-H20