


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.09.30	阿树

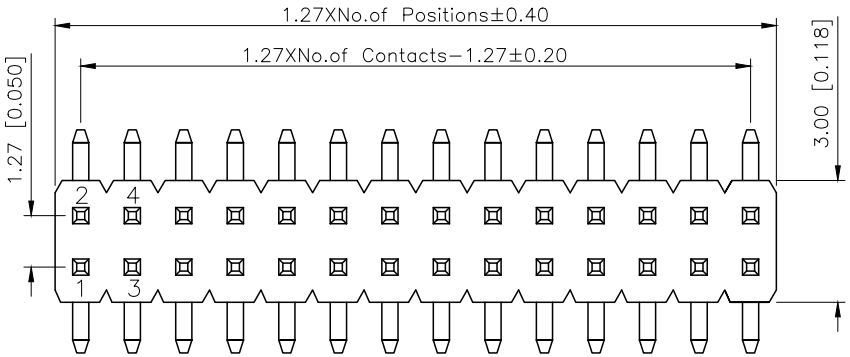

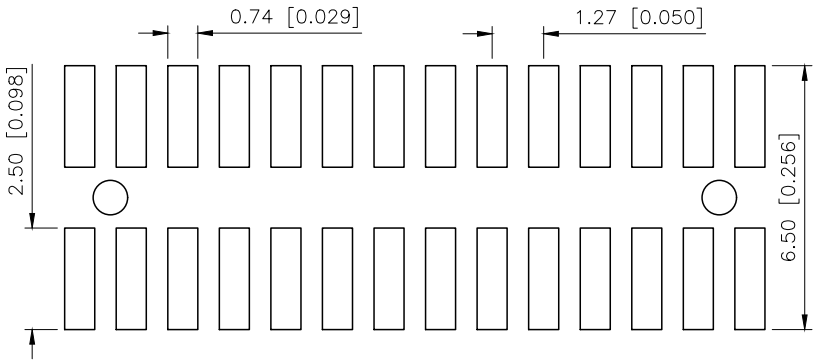

PCB LAYOUT

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:1A AC/DC
额定电流：1A AC/DC
Withstanding voltage:300V AC/minute
耐受电压：300V AC/分钟
Temperature range:−40℃−+105℃
温度范围：−40℃−+105℃
Insulation resistance:≥500MΩ
绝缘电阻：≥500MΩ
Contact resistance:≤20mΩ
接触电阻：≤20mΩ
Material:PA6T UL94V−0
材质：PA6T UL94V−0
Reflow soldring temperature:260±5℃，10S
回流焊温度：260±5℃，10S

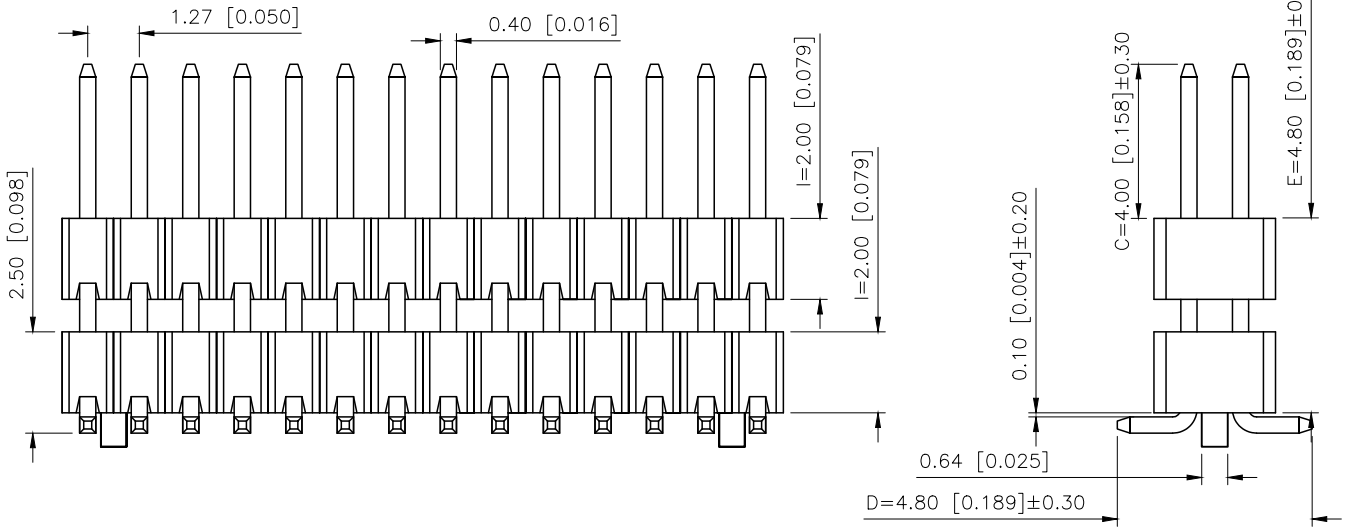

PART NO.:

X1322 W V S−2x25 I S−C40 D48−E48
① ② ③ ④ ⑤ ⑥⑦ ⑧ ⑨ ⑩

①Series No
②Category:W−Water
③Welding Board Angle:V−Stright 180°
④Welding Way:S−SMT
⑤Row No −Pin No:2xXX−2x02P−2x40P
⑥Plastic height: I=2.0mm
⑦Type:S−Positioning column
⑧Pin length: C=4.0mm
⑨Pin pitch:D=4.8mm
⑩Pin length:E=4.8mm

X1322WVS−2x25IS−C40D48−E48	PA6T	Brass	X1321F
PART NO	Material	Material(Pin)	Suitable XKB Female

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB 星创 Connection

DESIGN	阿树	VIEW:	MODEL TYPE: 1.27mm BTB Connector
CHECKED		UNIT: mm/in	PART NO.: X1322WVS−2x25IS−C40D48−E48
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1